NOTES:
1. SUGGESTED MOUNTING HOLE = ø.218
2. SOLDER PREFORM SUPPLIED AS HARDWARE.

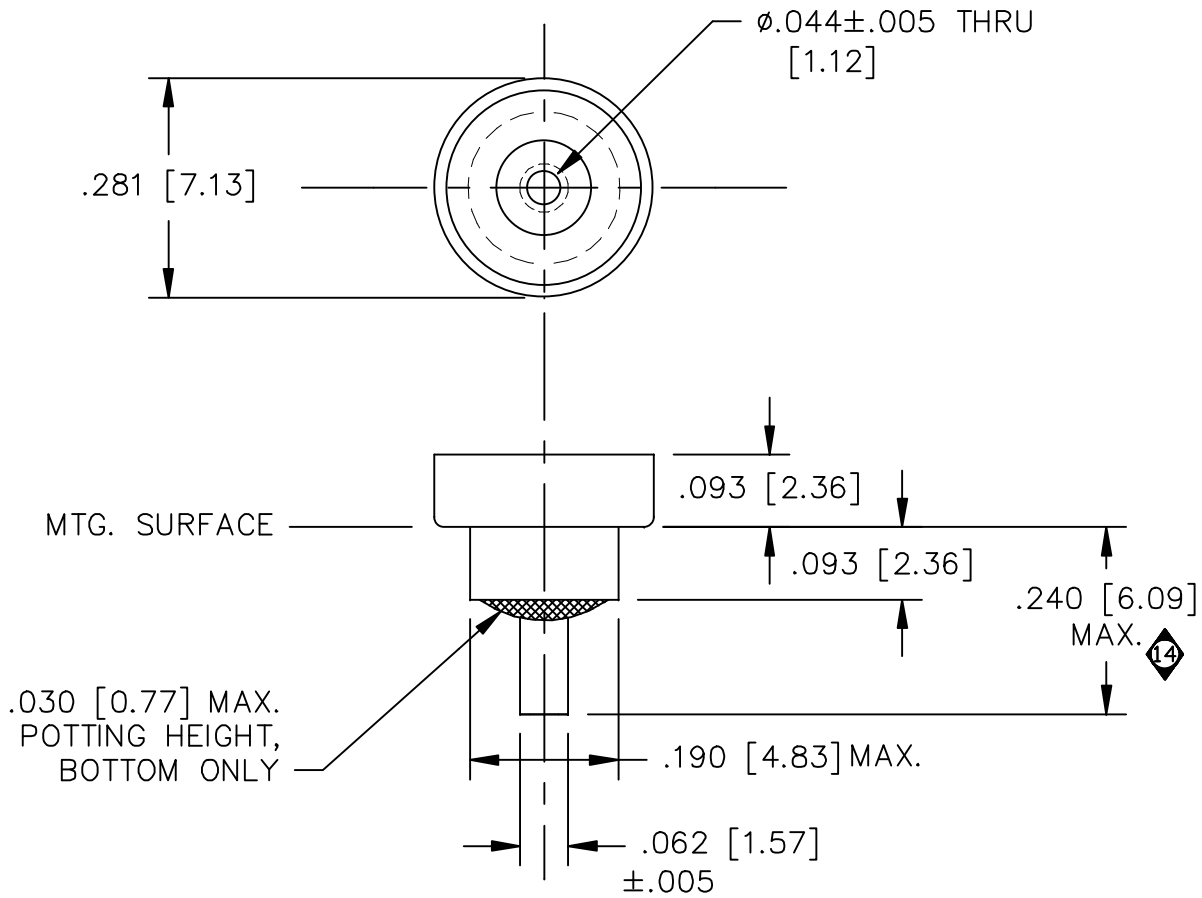

LEAD FINISH:	--------
BUSHING FINISH:	SILVER
CAPACITANCE	1000pF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	AMP MAX.
WORKING VOLTAGE	85°C VDC MAX. 125°C VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
10	N/A
100	N/A
1 GHz	N/A
10 GHz	N/A

SCHEMATIC



MARKING:

PART: NONE
BAG:
54-802-002-102P
MIN./MAX. CAP VALUE
DATE CODE
QTY./BAG (200 MAX.)

NOTE: PREFORM SUPPLIED AS HARDWARE.

REV. NO.	CHANGE NOTICE
14	CN #14644
13	CN 59881-ENG
12	CN. 213228
11	CN. 185173

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx±.015
Angles ±0° 30′

CODE IDENT. NO. OLSP2

api technologies corp.
FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN
Date 7-17-15
Engr. B.DEVINE
Scale NONE

Description FT CERAMIC FILTER

54802002X5V102P