


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

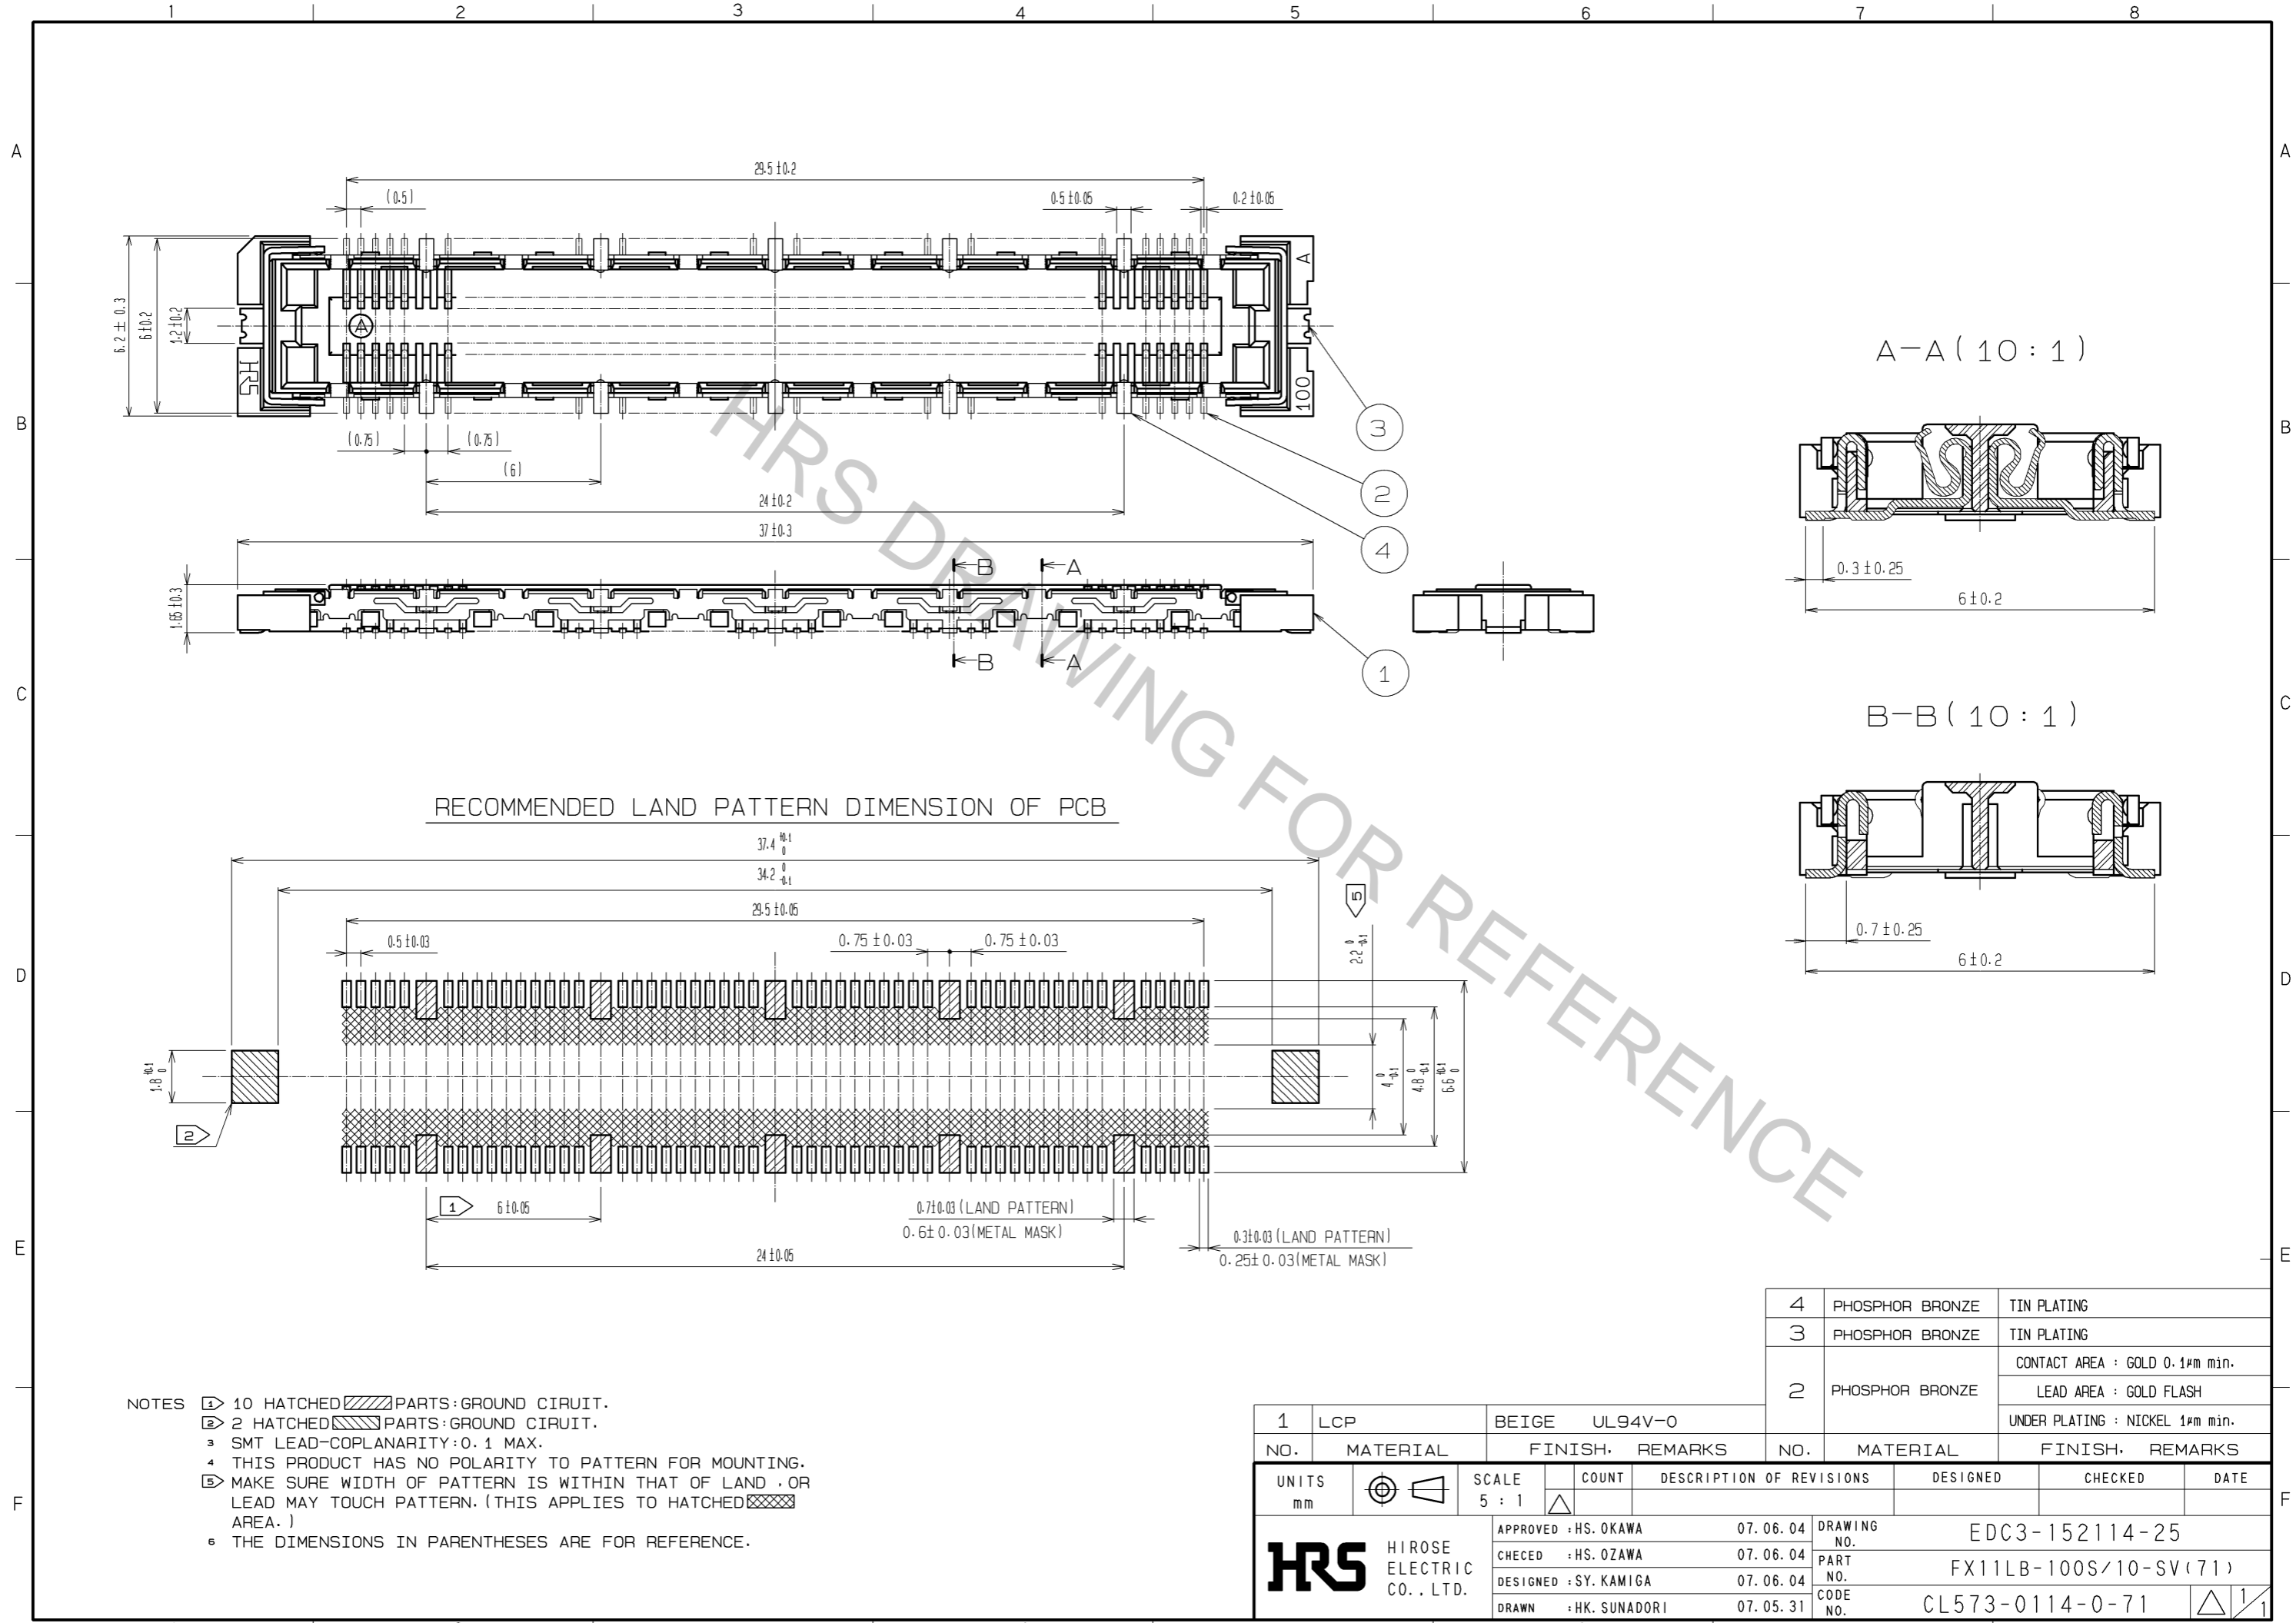

- NOTES
- ① 10 HATCHED PARTS:GROUND CIRCUIT.
 - ② 2 HATCHED PARTS:GROUND CIRCUIT.
 - ③ SMT LEAD-COPLANARITY:0.1 MAX.
 - ④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

4	PHOSPHOR BRONZE	TIN PLATING
3	PHOSPHOR BRONZE	TIN PLATING
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.
		LEAD AREA : GOLD FLASH
		UNDER PLATING : NICKEL 1μm min.

NO.	MATERIAL	FINISH.	REMARKS	NO.	MATERIAL	FINISH.	REMARKS
1	LCP	BEIGE	UL94V-0				

UNITS	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm				

APPROVED :	HS. OKAWA	07.06.04	DRAWING NO. EDC3-152114-25
CHECED :	HS. OZAWA	07.06.04	
DESIGNED :	SY. KAMIGA	07.06.04	
DRAWN :	HK. SUNADORI	07.05.31	

HIROSE ELECTRIC CO., LTD.	PART NO. FX11LB-100S/10-SV(71)
	CODE NO. CL573-0114-0-71