
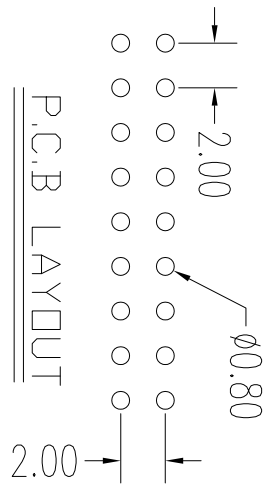
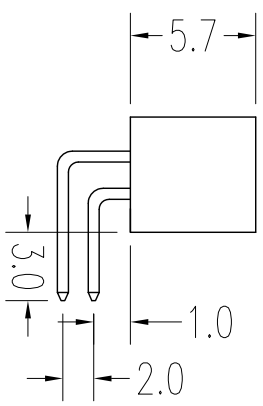
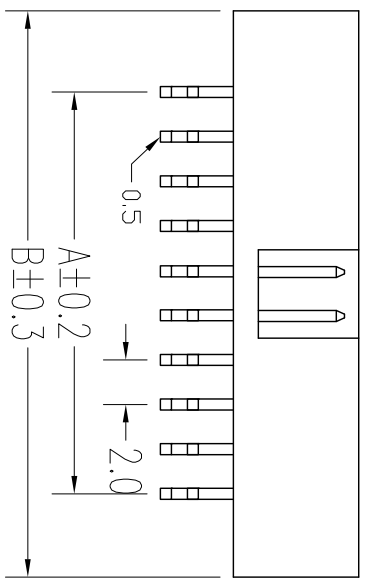


REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

NOTES:
 Insulator Material: Nylon-6T, UL 94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

Current Rating : 1A AC,DC
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -40°C~+105°C

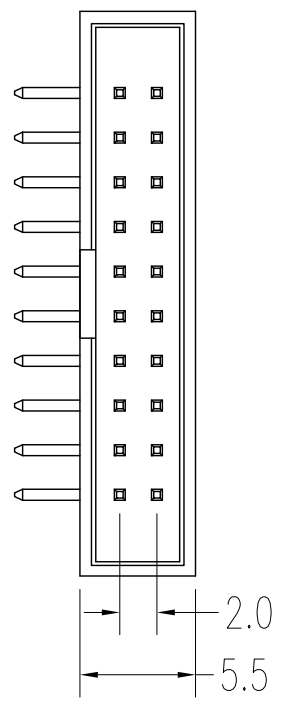

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.00	11.20
08	6.00	13.20
10	8.00	15.20
12	10.00	17.20
14	12.00	19.20
16	14.00	21.20
18	16.00	23.30
20	18.00	25.20
24	22.00	29.20
26	24.00	31.20
30	28.00	35.20
34	32.00	39.20
40	38.00	45.20
44	42.00	49.20
50	48.00	55.20
60	58.00	65.20
64	62.00	69.20

RoHS

UNLESS TOLERANCE		DRAW BY	
GENERAL	ANGLE	DESIGN BY	
X ± 0.30	X° ± 3.0°	CHECK BY	
.X ± 0.20	.X° ± 2.0°	APPROVE BY	
.XX ± 0.15	.XX° ± 1.0°	SCALE	1:1
.XXX ± 0.08	.XXX ± 0.5°	SHEET	1/1
		UNIT	MM
		Port NO.	3120-XX-0200-00
		DRAW NO.	
CnC Tech, LLC		REV: A	