


Pin strip - PST 1,3/ 5-LV-5,0 - 1704518

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Pin strip, nominal current: 14 A, rated voltage (III/2): 400 V, number of positions: 5, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, Specifically for PT 2,5/..-PVH



The figure shows a 10-position version of the product

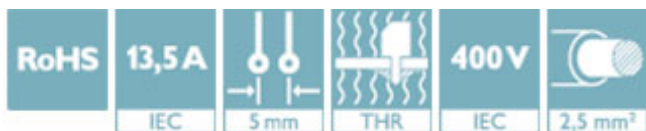

Key Commercial Data

Packing unit	100 STK
GTIN	 4 017918 995102
GTIN	4017918995102

Technical data

Dimensions

Length [l]	10.8 mm
Width	24.85 mm
Pitch	5 mm
Dimension a	20 mm
Width [w]	24.85 mm
Height [h]	14.7 mm
Constructional height	11.2 mm
Length of the solder pin	3.5 mm
Length	10.8 mm

General

Range of articles	PST 1,3/..-LV
Insulating material group	IIIb
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V

Pin strip - PST 1,3/ 5-LV-5,0 - 1704518

Technical data

General

Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	13.5 A (depends on the plug used)
Maximum load current	13.5 A (depends on the plug used)
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	5

Standards and Regulations


Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Drilling diagram

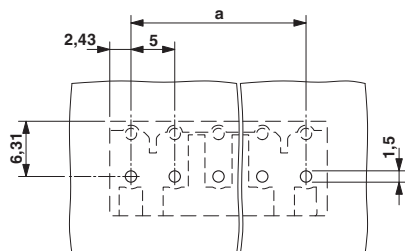

Dimensional drawing

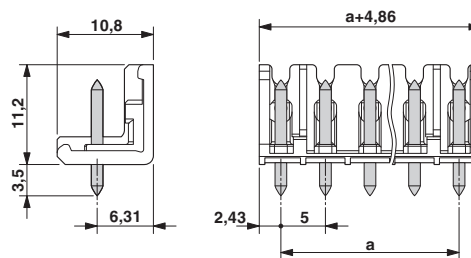

Approvals

Approvals

Approvals

EAC / cULus Recognized


Ex Approvals

Approval details

Pin strip - PST 1,3/ 5-LV-5,0 - 1704518

Approvals

EAC		B.01742
-----	-----------------------------------------------------------------------------------	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20030211
------------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------

	D	B
Nominal voltage UN	300 V	300 V
Nominal current IN	10 A	10 A

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>