


SPECIFICATIONS

Ratings: 10mA @ 35 VDC
 Electrical Life: 500,000 cycles typical
 Contact Resistance: 10mΩ max., typical @ 2-4 VDC, 100mA
 Insulation Resistance: 1,00MΩ min.
 Dielectric Strength: >1,000 V rms at sea level
 Operating Force: 130 ± 50 gf

MATERIALS

Housing: Polycarbonate (PC)
 Base: Valox
 Contacts: Silver-plated copper alloy
 Terminals: Silver-plated copper alloy


HOW TO ORDER

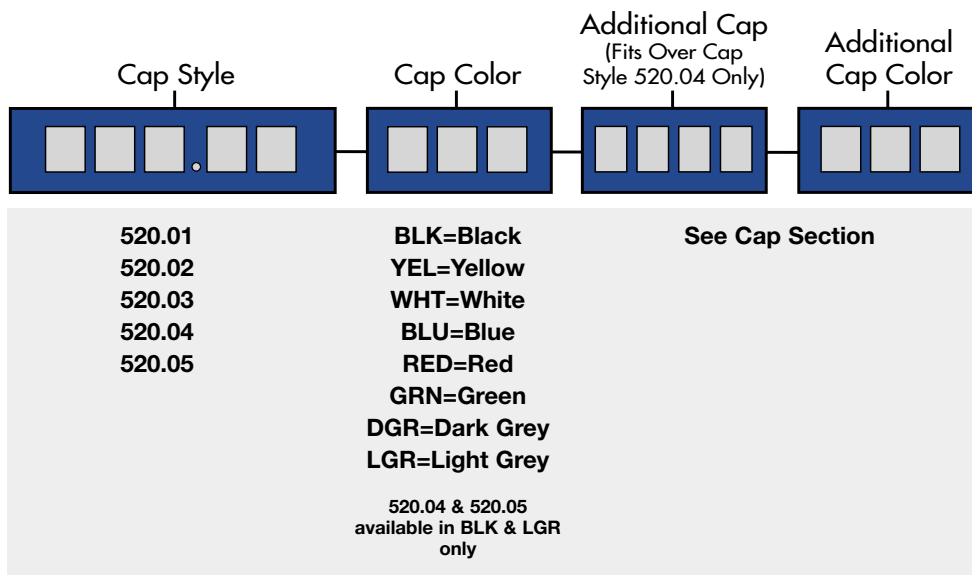


EXAMPLE

520.04 → BLK → TAA → RED


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

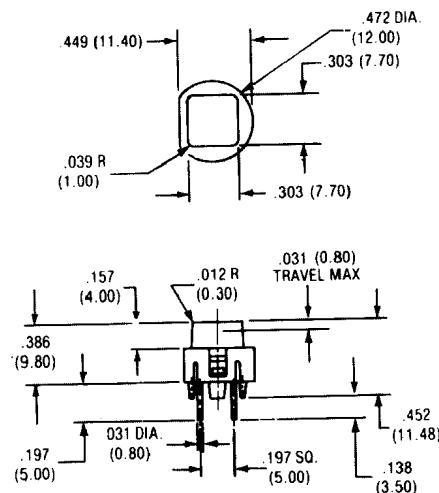

P.C. MOUNTING





Schematic




PUSHBUTTON SWITCHES




520.02

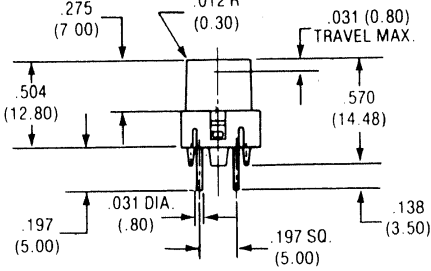



P.C. MOUNTING




Schematic




520.03

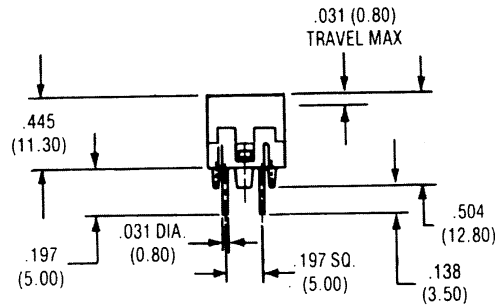



P.C. MOUNTING




Schematic




520.04

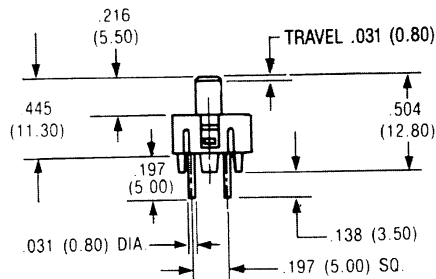



P.C. MOUNTING




Schematic




520.05

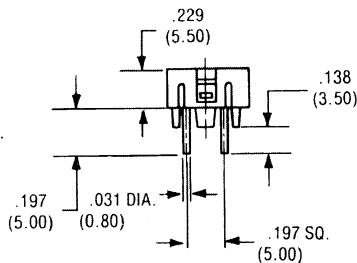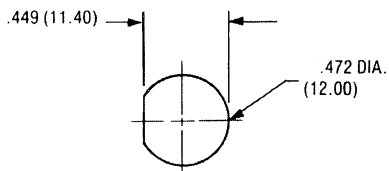

P.C. MOUNTING



Schematic



520.04 and 520.05 are available in black and light grey only.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.