


ELFD SERIES PART NUMBERING SCHEME

REV	ECN	APPD
-	3741	JEC 4/21/99
A	3865	JC 11/9/99
B	5354	JT 11/10/03
C	5742	RN 12/28/05

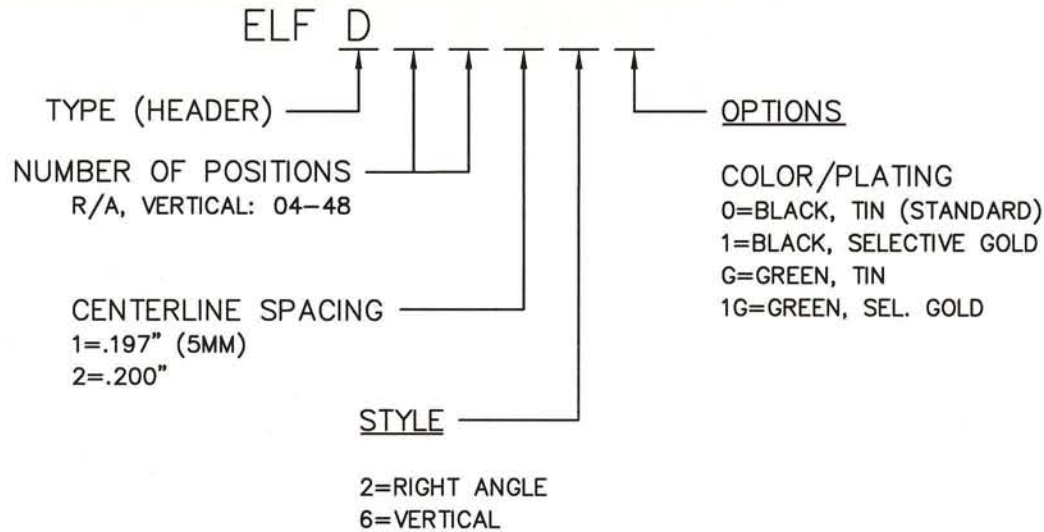

CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:

- CUSTOM COLORS
- CUSTOM MARKING
- CUSTOM KEYING
- SELECTIVE CONTACT LOADING

MATERIALS:

HOUSING: PBT, UL 94 V-0; STANDARD TEMP.
CONTACT: BRASS

MAX OPERATING TEMPERATURE:
105°C



RATINGS

CURRENT - 15A
VOLTAGE - 300V
U.L. FILE NO. EB3421




RATINGS

CURRENT - 15A
VOLTAGE - 300V
CSA FILE NO. LR69703


DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992

CURRENT - 15A
VOLTAGE - 300 V
TUV FILE NO. 20396

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE ELFD SERIES 2-TIER STACKABLE HEADER MODULE		
			ENGR	J. WILKINSON 4/19/99			
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA		CHKD	A. PATRIE 4/21/99	SIZE	DWG NO.	REV
			APPD	J. CAHALY 4/21/99	A	ELFD04260	C
				CODE: 58982	SCALE: NONE	SHEET 1 OF 2	

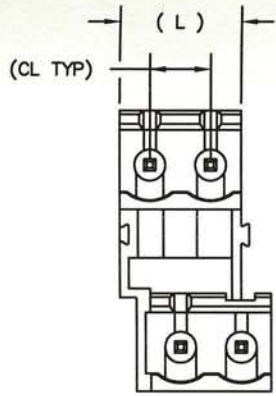


ELFD04XX0
4 POS HDR

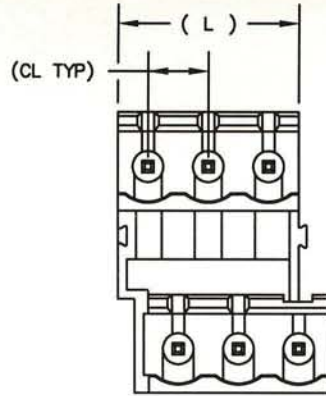



ELFD06XX0
6 POS HDR

L=NUM OF POS X CL SPACING

VERTICAL

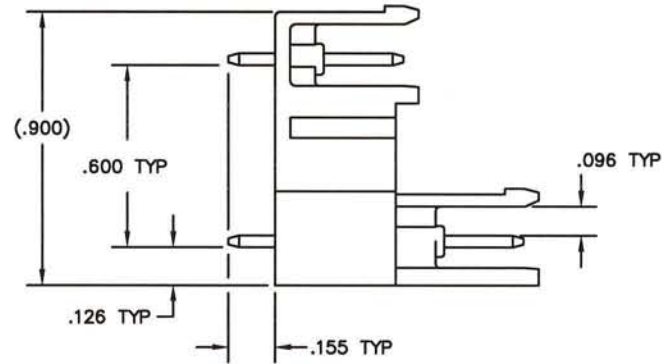


RIGHT ANGLE

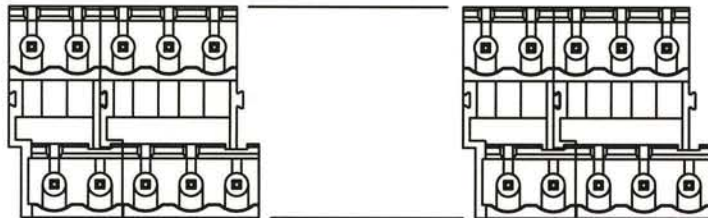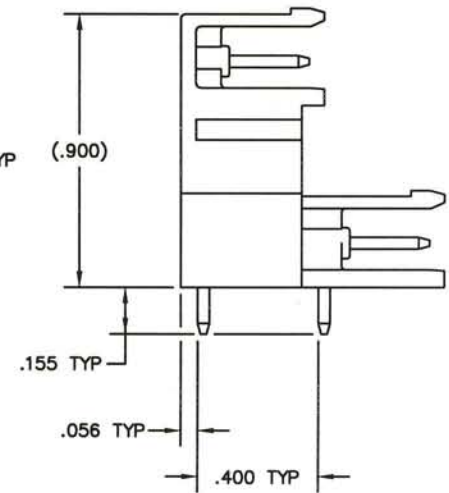

ELFDXX260
ELFD ASSEMBLY, XX POSITIONS

PRINTED CIRCUIT BOARD CONFIGURATION

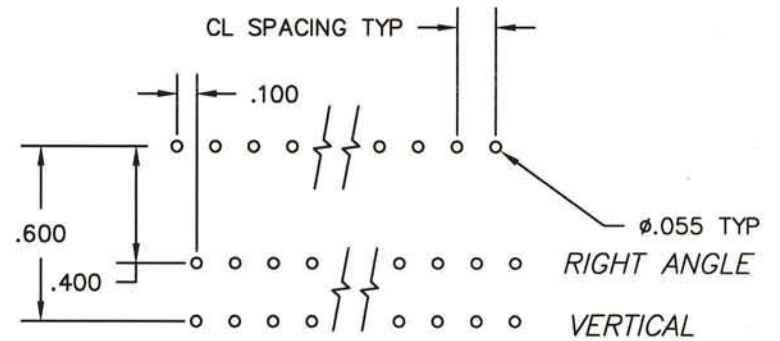

RECOMMENDED PCB THICKNESS: .062±.008

SIZE	DWG NO.	REV
A	ELFD04260	C
CODE: 58982	SCALE: NONE	SHEET 2 OF 2