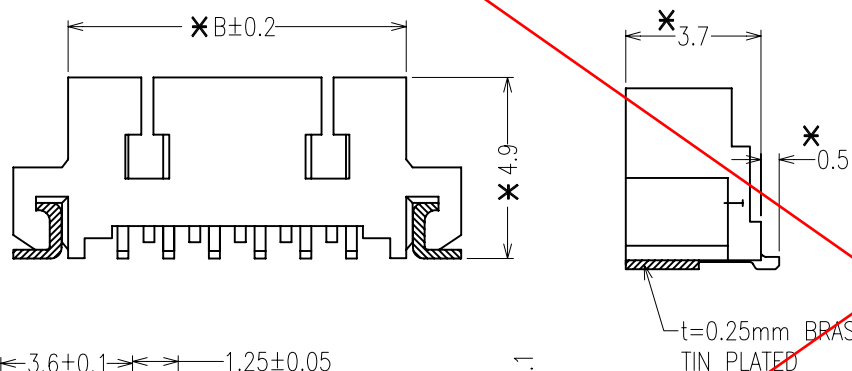
**OBSOLETE**

SPECIFICATIONS:

MATERIAL:-

MOULDING: NYLON 9T, UL94V-0

CONTACT: PHOSPHOR BRONZE, 0.3MM FLAT PIN

FINISH:-

TIN PLATED

ELECTRICAL:-

CURRENT RATING: 1A AC/DC MAX.

WORKING VOLTAGE: 100V AC/DC

WITHSTAND VOLTAGE: 500V AC/MINUTE

CONTACT RESISTANCE: 20 mΩ MAX.

INSULATION RESISTANCE: 100 MΩ MIN.

ENVIRONMENTAL:-

TEMPERATURE RANGE: -25°C TO +85°C

OTHERS:-


MATE WITH HOUSING M30-130 XX 46

NOTES: ALL DIMENSIONS AND NOTES

MARKED * ARE CRITICAL AND

MUST BE CHECKED IN ACCORDANCE

WITH QUALITY DOC. QI-02A

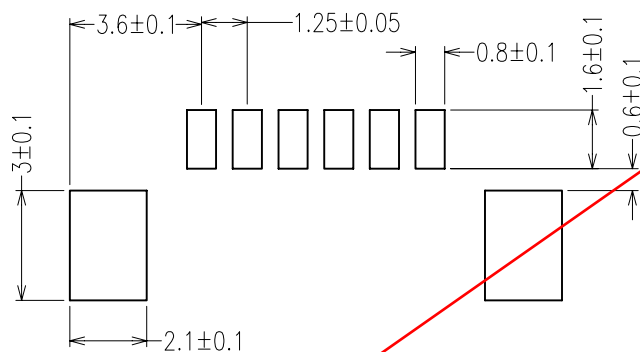

PCB LAYOUT SURFACE MOUNTING

△3 *NOTE:
REMOVE R FOR LOOSE BAG PACKING

ORDER CODE

M30-301 XX 46R

NO. OF WAYS — WITH R: REEL PACKING
WITHOUT R: LOOSE BAG PACKING
△4 (10pcs Per Strip, 10 Strips per Bag)

NO. OF WAYS	PART NO	DIM (MM)	
		A	B
2	M30-3010246R	1.25	4.25
3	M30-3010346R	2.50	5.50
4	M30-3010446R	3.75	6.75
5	M30-3010546R	5.00	8.00
6	M30-3010646R	6.25	9.25
7	M30-3010746R	7.50	10.50
8	M30-3010846R	8.75	11.75
9	M30-3010946R	10.00	13.00
10	M30-3011046R	11.25	14.25
11	M30-3011146R	12.50	15.50
12	M30-3011246R	13.75	16.75
13	M30-3011346R	15.00	18.00
14	M30-3011446R	16.25	19.25
15	M30-3011546R	17.50	20.50

Allan	4	02.10.08	A166
Allan	3	04.07.08	A141
Allan	2	02.07.08	A139
Allan	1	18.09.06	-

NAME	ISS.	DATE	C/NOTE

APPROVED: *Paul*CHECKED: *Paul*

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.15mm
X.XXX = ±0.08mm
ANGLES = ±5°
UNLESS STATED

MATERIAL: SEE NOTES
FINISH: SEE NOTES
S/AREA: mm²

TITLE: HEADER P=1.25MM SMT STRAIGHT TYPE

DRAWING NUMBER: M30-301 XX 46R

SHT
1
OF
1