




NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: CURRENT: 100mA  
VOLTAGE: 30 VDC
5. OPERATING LIFE: 50,000 MAKE-AND-BREAK CYCLES
6. INSULATION RESISTANCE: 500VDC, 100 Mega-OHM, MIN.
7. OPERATING FORCE: 250 ± 100 GRAMS
8. OPERATING TEMP.: -20°C to 70°C
- ▲ 9. TRAVEL: MOMENTARY  
1.50 ± 0.3mm FULL TRAVEL
10. CONTACT RESISTANCE: 50 Milli-OHM, MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT
- ▲13. LED: NONE



▲ ACTUATOR COLOR:  
OPAQUE GREEN

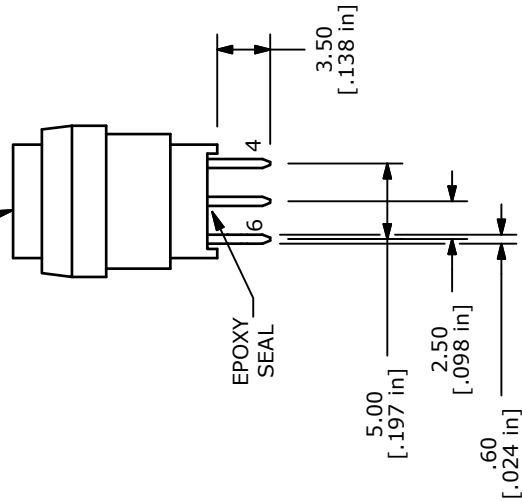

**E-SWITCH™**

TITLE LP40A1PBAGN

1/19/11 BGL

DRAWING UPDATE

B

4/19/10 BLR

Release For Production

A

DATE

DESCRIPTION

REV

2 = 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

BY

PCB NO

DATE

4/19/2010

DR

BLR

DWG

B240038

REV

B