


SCPS6430

SMD POWER INDUCTORS

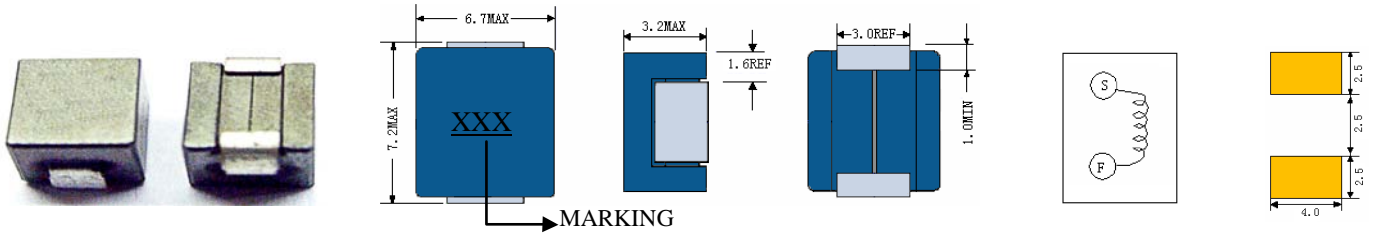



• Features

1. Surface mount inductors designed for high speed switch mode applications requiring low inductance and high current.
2. 125°C operating temperature.
3. Inductance range from 0.047uH to 0.12uH.
3. High Current - up to 47 Amps.



ELECTRICAL CHARACTERISTICS

Part Number	Inductance (μH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current ⁽³⁾ (A)	Temperature Current ⁽⁴⁾ (A)
SCPS6430-047	0.047	1MHz	0.26m	42	30
SCPS6430-068	0.068	1MHz	0.26m	32	30
SCPS6430-082	0.082	1MHz	0.26m	26	30
SCPS6430-R10	0.100	1MHz	0.26m	22	30
SCPS6430-R12	0.120	1MHz	0.26m	18	30
SCPS6430-R15	0.150	1MHz	0.26m	14.5	30

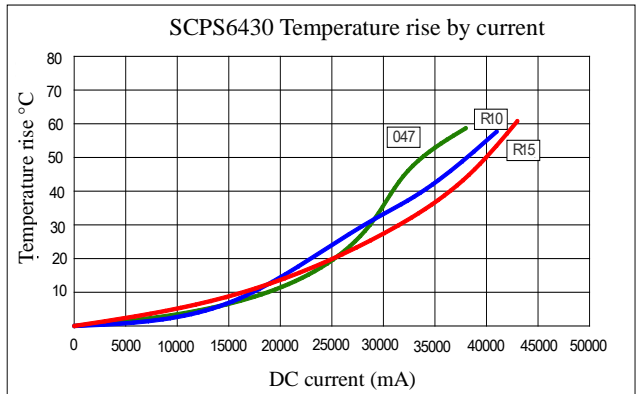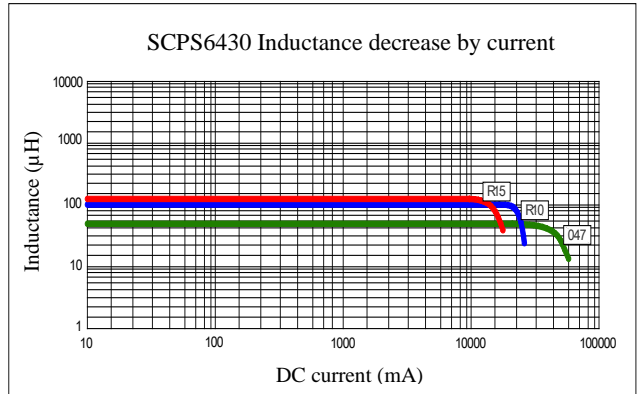

- (1). Inductance tolerance $\pm 20\%$ tested at 0.25V, 0ADC and 25°C
 (2). DCR measured at 25°C.
 (3). The DC current at which the inductance decreases by 25% from its initial value.
 (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.