


1. Wiring Diagram.

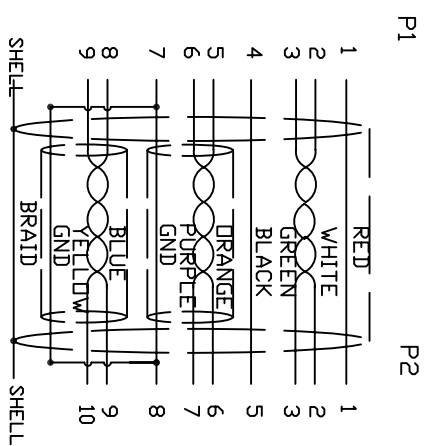

2. Cable test condition :

Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2					
4	PVC	45P PVC BLACK OVERMOLD	25g						
3	PE	LLDPE 500026 6201	16g						
2	CONN	USB3.0 A/M G/F BLUE	1	P1					
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	1000mm					
NO.	PART NO.	DESCRIPTION		QTY	UNIT/REF				
		BILL OF MATERIAL							

A	INITIAL RELEASE	2014/08/28
REVISION#	DESCRIPTION	DATE
Cnc Tech, LLC		
DRAWN	DATE	CUSTOMER P/N:
WENC	08/24/14	103-1092-BL-00100
CHECKED	DATE	TITLE
EDWIN	08/24/14	CABLE USB3.0 A/M TO MICRO B MALE
APPROVAL	CUSTOMER:	REV
		A
	SHEET 1 OF 1	