


Extended length is with 500g of force

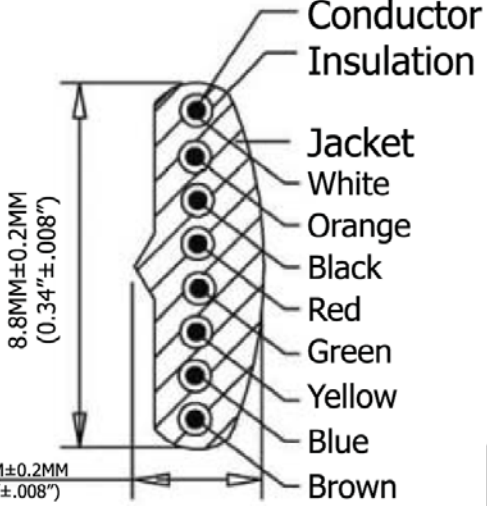

P1	P2
1 WHITE	8
2 ORANGE	7
3 BLACK	6
4 RED	5
5 GREEN	4
6 YELLOW	3
7 BLUE	2
8 BROWN	1

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainde
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

Unit: MM

**SEC: A-A**



Scale	1:1						Name	Item No.	
TOLERANCE							Drawn	11.18.11	
X.X	±0.40						Chappell		
X.XX	±0.25						Approved		
X.XXX	±0.15								
Angle	±3°								
								<b>AT-C-26-8/8/W-7</b>	
								<b>Title</b> NON-UL 26 AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Standard Plug, 50µ" of contact plating, White	
								<b>Drawing No.</b>	<b>rev00</b>
								<b>Replace</b>	<b>Sheet</b>
				Modification	Date	Name			

