
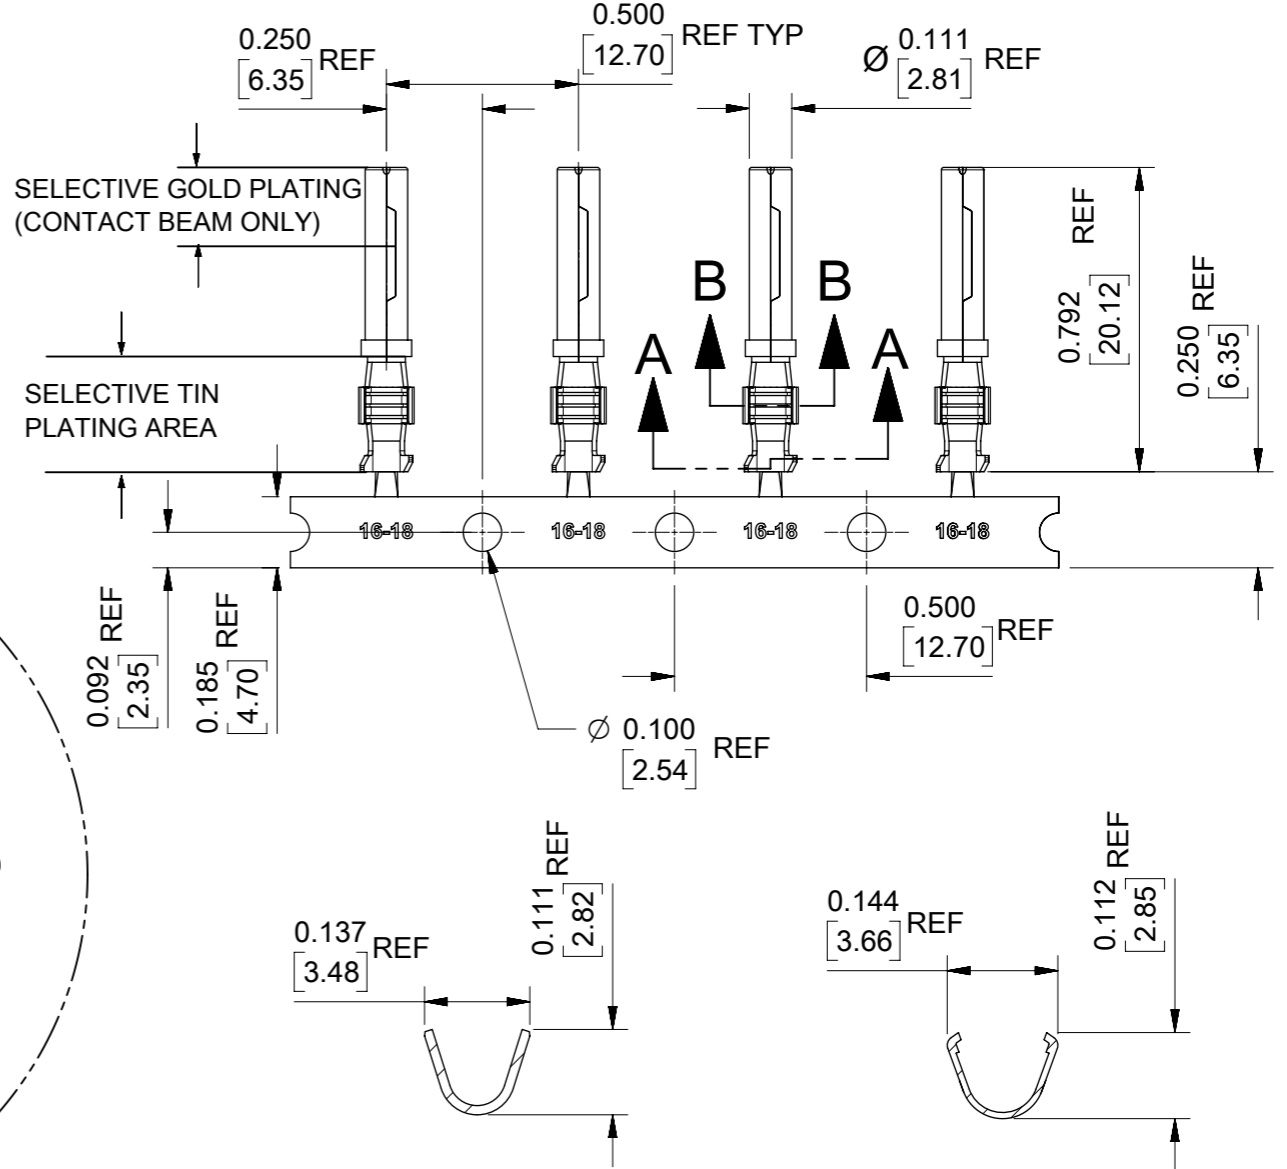


STRIP MATERIAL NUMBER	FINISH
84525-0009	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0032	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

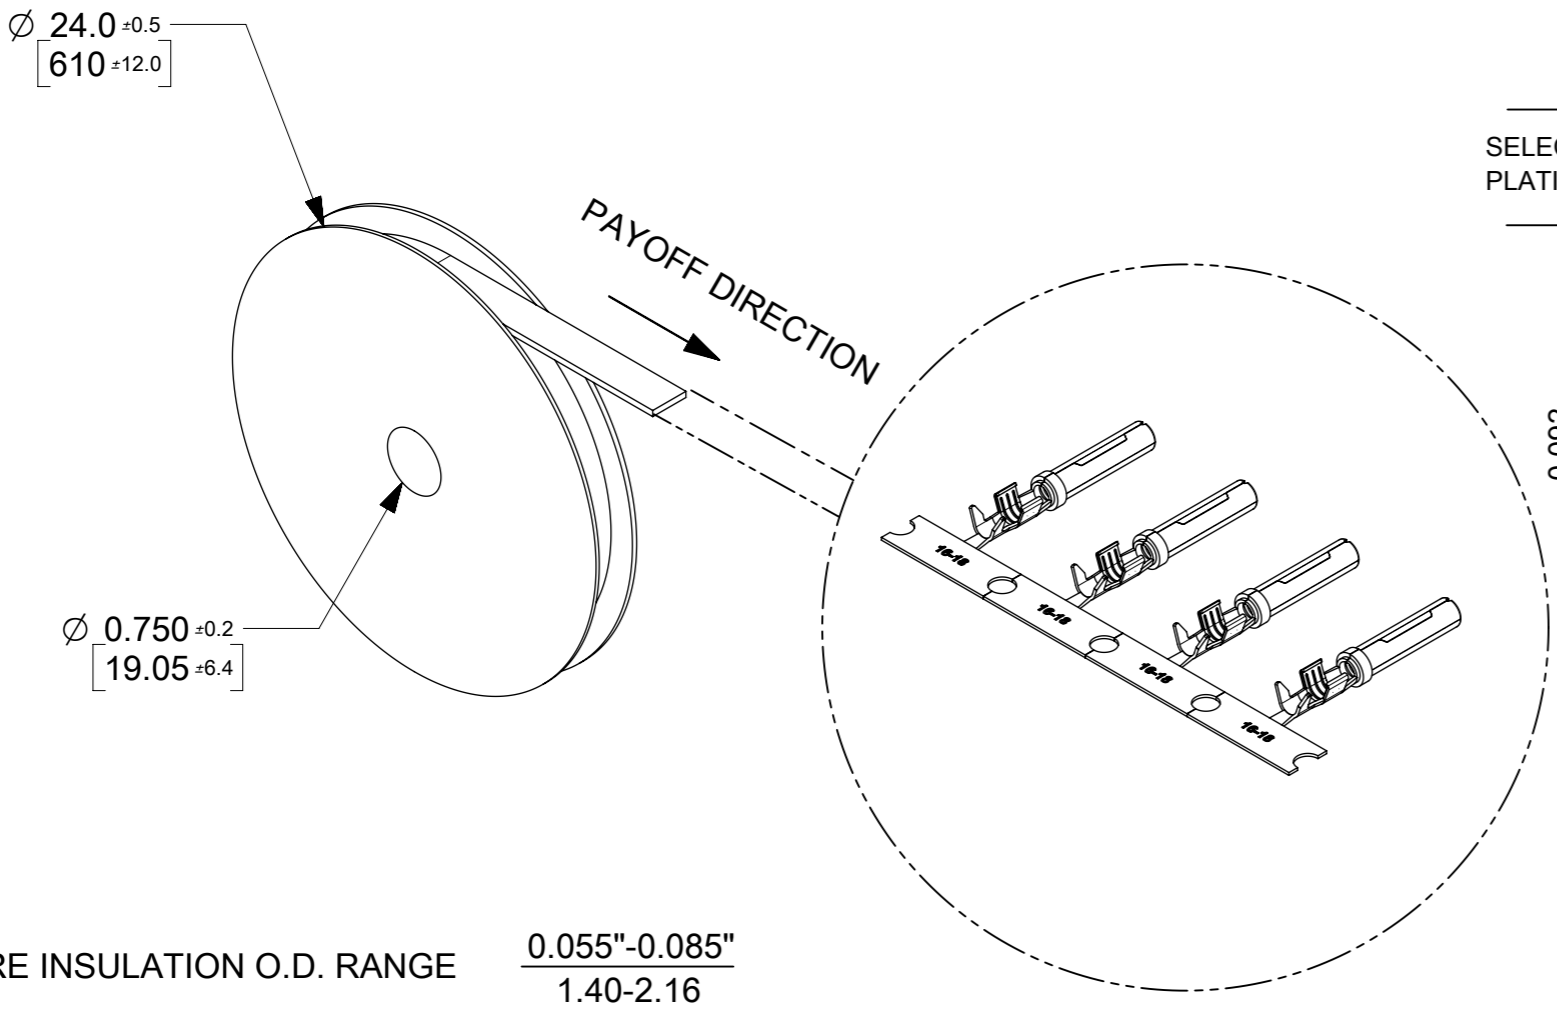

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK.
FINISH: SEE CHART.
 2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE WITH SERIES XRC & ML-XT CONNECTOR ASSEMBLIES.
 5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
QUALITY SYMBOLS		REDRAWN		GENERAL TOLERANCES (UNLESS SPECIFIED) MM		DIMENSION UNITS		SCALE			
▽A	= 0	2016/01/25	2016/02/15	ANGULAR TOL ± 2.0 °		IN/MM	2:1	DRWN BY DATE			
▽E	= 0	EC NO: 102697	DRWN: JFLETCHER	4 PLACES ±		JFLETCHER	2016/01/25	CHK'D BY DATE		XRC SOCKET W/SNAP WINDOW 16-18 AWG 0.055"-0.085" WIRE Ø	
▽B	= 0	CHK'D: NDOWDS	APPR: JDWALLACE	3 PLACES ±		NDOWDS	2016/02/15	APPR BY DATE			
▽C	= 0			2 PLACES ± 0.13		JDWALLACE	2016/02/23	DRAWING SIZE		PRODUCT CUSTOMER DRAWING SERIES: 84525 MATERIAL NUMBER: SEE CHART CUSTOMER: GENERAL MARKET	
▽D	= 0			1 PLACE ± 0.2		A3	THIRD ANGLE PROJECTION	DOCUMENT NUMBER			
▽	= 0			0 PLACES ±				845250010		DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1	
■	= 0			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
▽	= 0										