

# Ceramic Surface Mount Crystal

- Small overall package dimensions
- Available in both 2 & 4 pads

Series **CX532**



Part Numbering Example: **CX532 Z - A1 B2 C2 150 - 10.0 D16 - 3**


CX532	Z	A1*	B2	C2	150	10.0	D16	-3
SERIES	ADDED FEATURES	OPERATING TEMP.	STABILITY	TOLERANCE	RESISTANCE	FREQUENCY	LOAD CAP.	OVERTONE
CX532	BLANK = BULK PACK Z = TAPE AND REEL	A0 = -10°C ~ +60°C A1 = -10°C ~ +70°C A2 = -40°C ~ +85°C	B1 = ±100 B2 = ± 50 B3 = ± 30 B4 = ± 10	C1 = ±100 C2 = ± 50 C3 = ± 30 C4 = ± 10	SEE CHART BELOW		D16,18,20,ETC. DS = SERIES	BLANK: FUND. -3: 3rd OT

\*NOTE: The above ABC combinations cover basic specification options. We tailor our crystal specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.


## Specifications:

<b>Frequency Range:</b>	8.000 ~ 80.000 MHz
<b>Operating Temperature:</b>	-10°C ~ +60°C <i>Standard</i>
<b>Frequency Stability:</b>	±100 ppm ± 50 ppm <i>Standard</i> ± 30 ppm
<b>Frequency Tolerance:</b> (at 25°C)	±100 ppm ± 50 ppm <i>Standard</i> ± 30 ppm
<b>Load Capacitance:</b>	Standard 16, 18 pF or series. Other values are available.
<b>Resistance:</b>	Maximum resistance corresponds to frequency. See chart below.
<b>Standard:</b>	Mode: Fundamental or 3rd Overtone Shunt Capacitance: 7 pF Max Aging: ± 5 ppm/year Drive Level: 100 µW Max
<b>Option:</b>	Packaging: Tape and Reel

### CX532

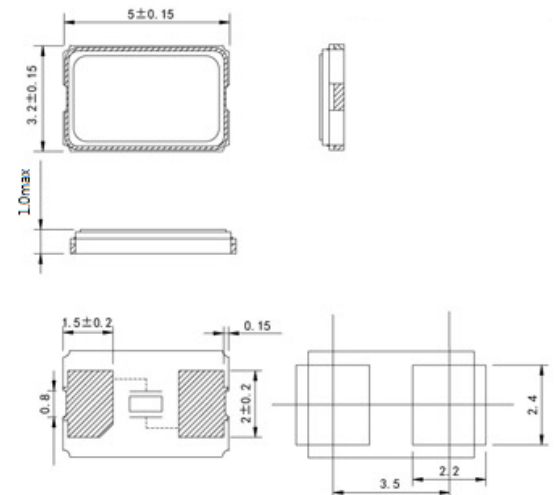

### CX532A

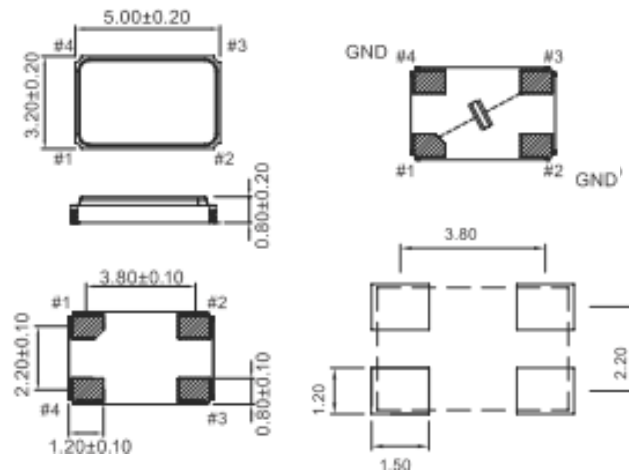

## Resistance Chart: All resistances are maximum

Frequency Range	MODE	E.S.R
8 MHz ≤ Fo < 11 MHz	A1	<100Ω
11 MHz ≤ Fo < 12 MHz	A1	<65Ω
12 MHz ≤ Fo < 13 MHz	A1	<60Ω
13 MHz ≤ Fo < 16 MHz	A1	<55Ω
16 MHz ≤ Fo < 24 MHz	A1	<50Ω
24 MHz ≤ Fo < 48 MHz	A1	<45Ω
48 MHz ≤ Fo < 53.125 MHz	A1	<40Ω
Fo = 80 MHz	A3	<60Ω

