
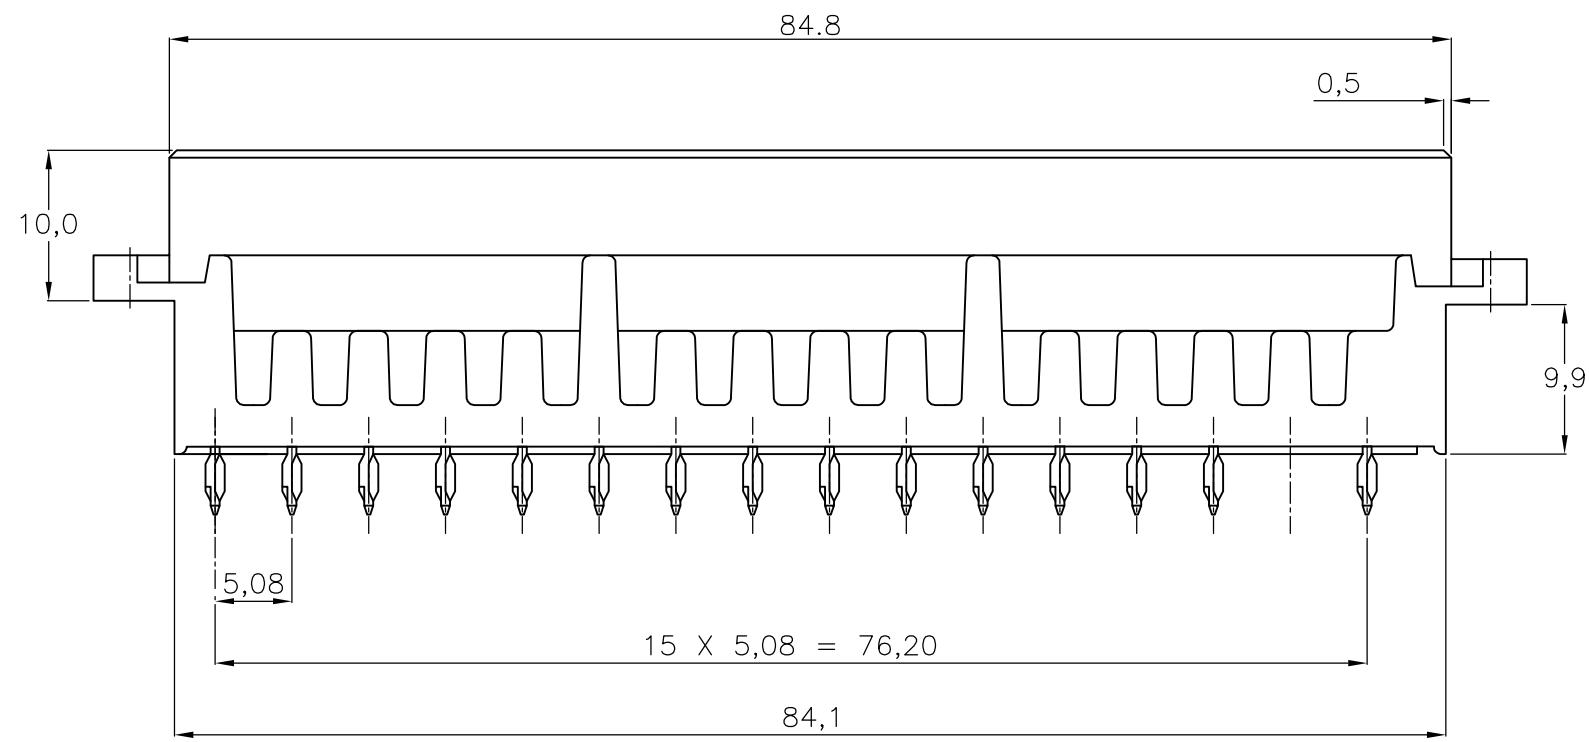
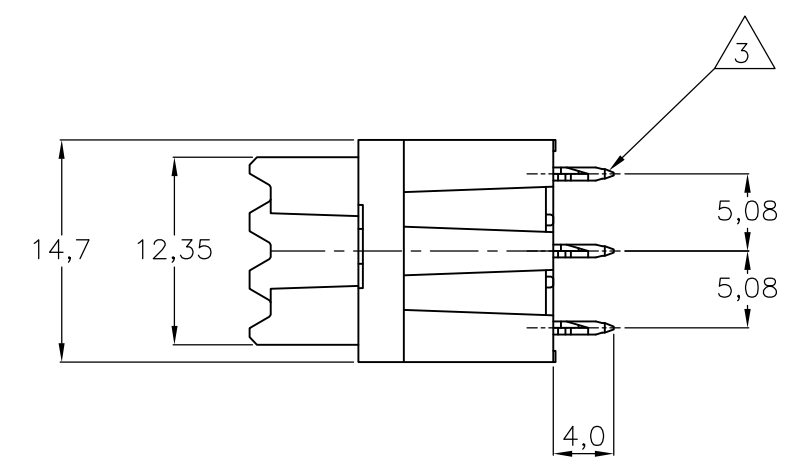


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	B	REVISED PER ECO-15-005333	07JUL2015	AP RP

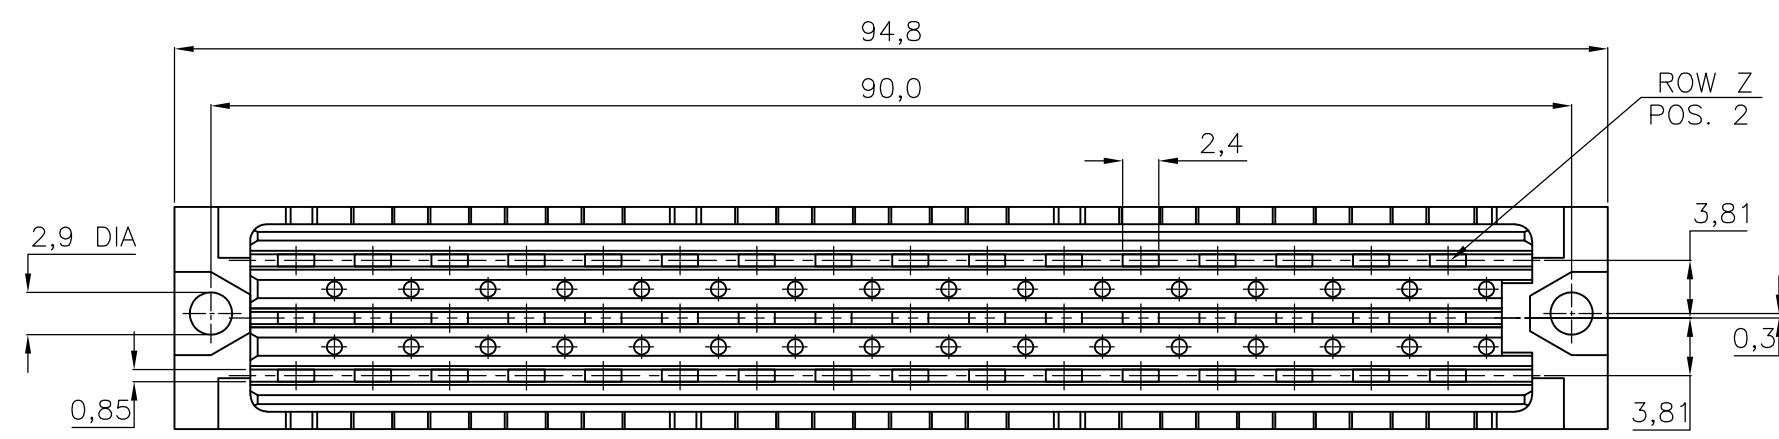

NOTES:

- 1 MATERIAL : - HOUSING : POLYESTER G.F.  
COLOUR : GREY.  
- CONTACTS : PHOSPHORBRONZE.
- 2 FINISH : -1: EIC 60603-2 PERFORMANCE LEVEL I OVER NICKEL  
IN CONTACT AREA.  
AT POST AREA 2,5µm Sn OVER 1,25µm NI.  
-4: EIC 60603-2 PERFORMANCE LEVEL II OVER NICKEL  
IN CONTACT AREA.  
AT POST AREA 2,5µm Sn OVER 1,25µm NI.
- 3 FOR P.C.B.-THICKNESS 1,6-2,4

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 0,94 to 1,09 mm
AFTER REFLOW	: 0,91 to 1,09 mm
Cu-thks	: 0,025 to 0,075 mm
SnPb-thks	: 0,004 to 0,010 mm

ROW	z	b	d	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2
POS	X	o	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

AN ASTERISK „X” DENOTES A CONTACT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC	± -
		1 PLC	± -
		2 PLC	± -
		3 PLC	± -
		4 PLC	± -
		ANGLES	± -
MATERIAL		FINISH	
-		-	

OBSOLETE		SEE NOTE 2	SEE NOTE 1	188826-4
FINISH		MATERIAL		PARTNUMBER
DWN J.GIBBELS 180CT95		<b>TE Connectivity</b>		
CHK R.V.LOKVEN				
APVD -		NAME		
PRODUCT SPEC -		31 POS. TYPE F FEMALE B.T.B. - A.P. CONNECTOR.		
APPLICATION SPEC -		RESTRICTED TO		
WEIGHT -		SIZE	CAGE CODE	DRAWING NO
CUSTOMER DRAWING		A3	00779	C-188826
SCALE		SHEET		REV
NTS		1 OF 1		B