


DRAWING NO
C - 210812

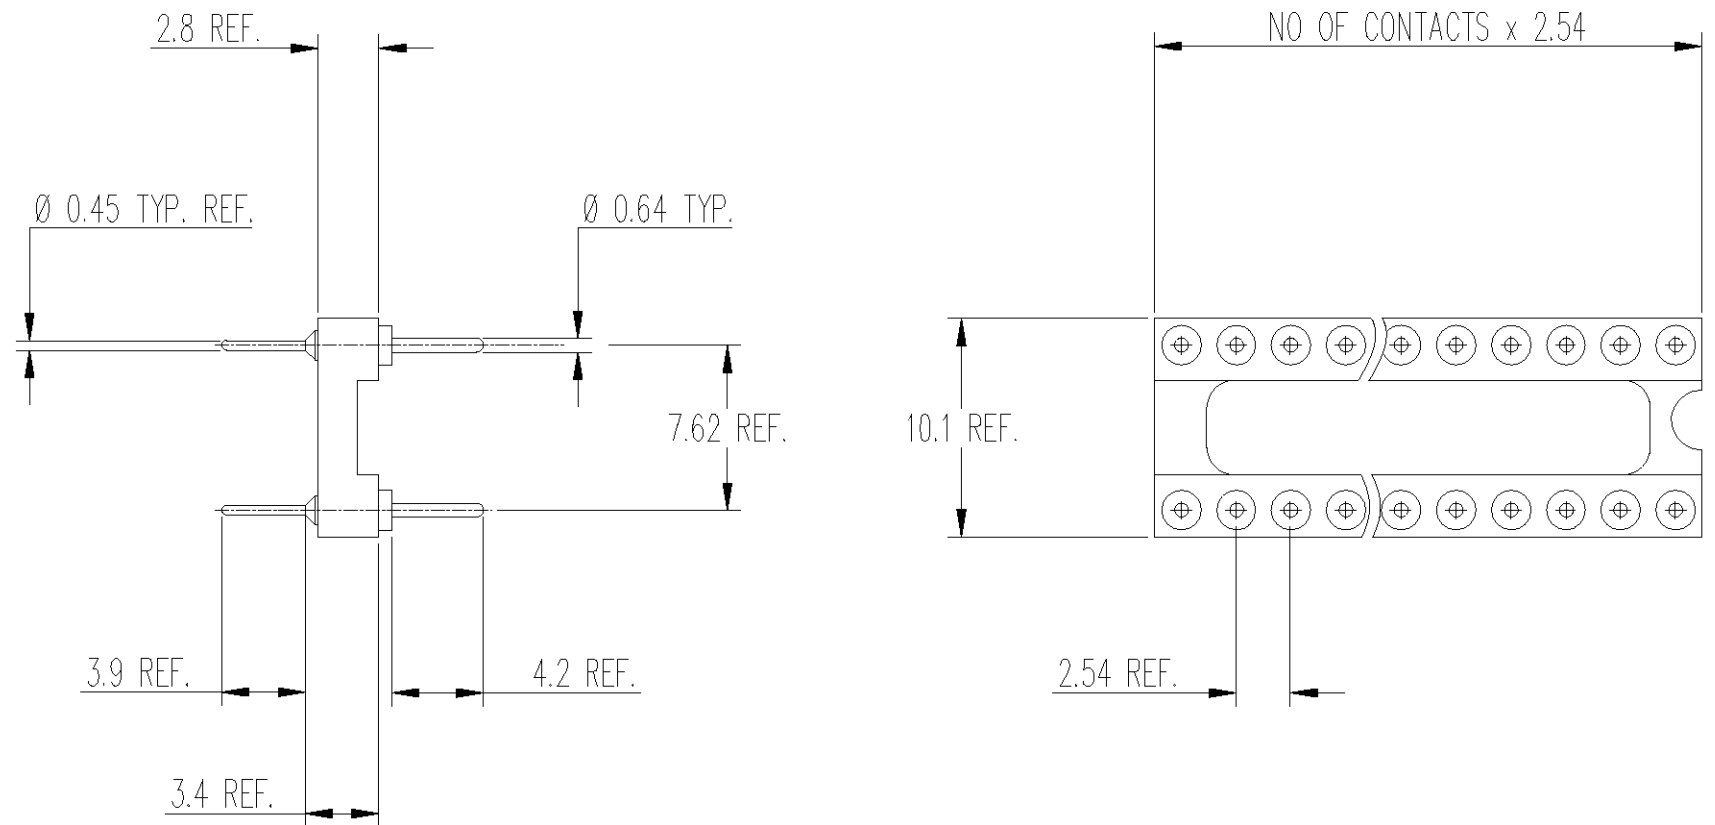

NOTE :

1. MATERIAL
-INSULATOR : GLASSFILLED THERMOPLASTIC POLYESTER
-PIN : BRASS
2. PLATING : 0.25µm 18c. Au OVER 2-3µm Ni
3. AVAILABLE NO OF CONTACTS : 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24 AND 28

NUMBER OF CONTACTS DESIGNED BY
PART NUMBER DASH CODE -4 TO 2-.....-8,
EXAMPLE : 2-210658-0, 20 CONTACTS

DIMENSIONS	mm							DRAWN P.-A. MEIER 16 APR 98	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FUTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM DSM SWITZERLAND.			
								CHECKED A. BOLIS 17 APR 98				
								APPROVED				
SURFACE TEXTURE	N7 (✓)								NAME OPEN FRAME PRECISION DIP HEADER			
CONCENTRICITY	0.15	01	EW00-0194-01	E. BRESSOUD	14 DEC 01	H. CACHOD	CUSTOMER DRAWING					
PRODUCT SPEC.		P	REV	ECN	DRWN	DATE	FOR REFERENCE ONLY					
DSM DECOLLETAGE SA SAINT-MAURICE CH 1890 SAINT-MAURICE (VS)							LOC EK	SCALE 2/1		SIZE A4	DRAWING NO C - 210812	SHEET 1 of 1

WAS 610-xx-TT-C