

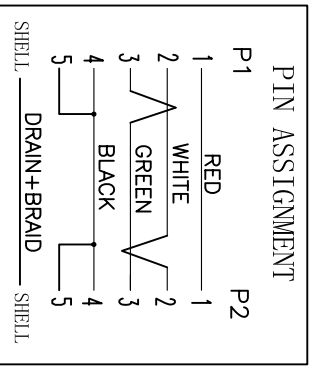


UNIT:mm

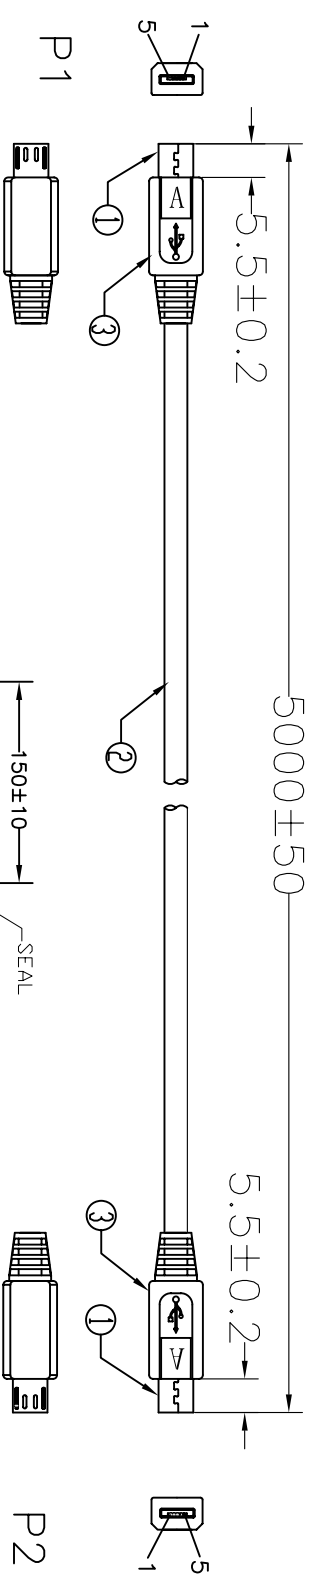

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 10Mohm(min.)
 4. dielectric test: DC 300V

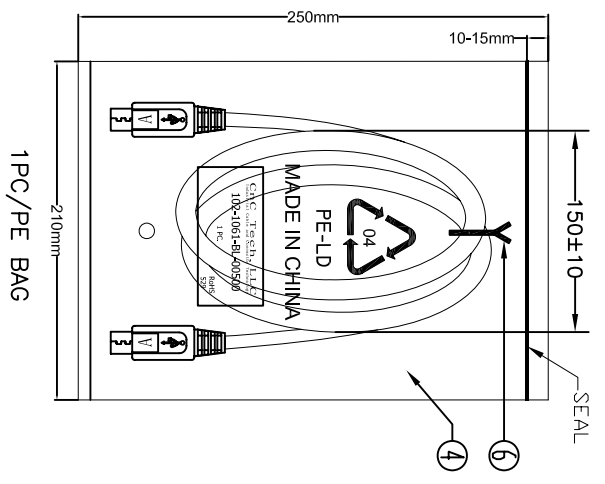

NO.	TIE	Q'TY	NAME	SPECIFICATION
①	PE BAG	1/5	CLEAR SIZE: 330*380*0.05mm PRINT BLACK*MADE IN CHINA*及印生产周期,有透气孔.	
②	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK*MADE IN CHINA*及印生产周期,有透气孔.	
③	OUT JACKET	12g	BLACK PVC-40P (MOULD NO:WM-173)	
④	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC)	
⑤	CONN	2	MICRO USB 5P A/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK	

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1061-BL-00500
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

4

3

2

1

D

D

C

C

B

B

A

A