


1 2 3 4 5 6 7


A

A

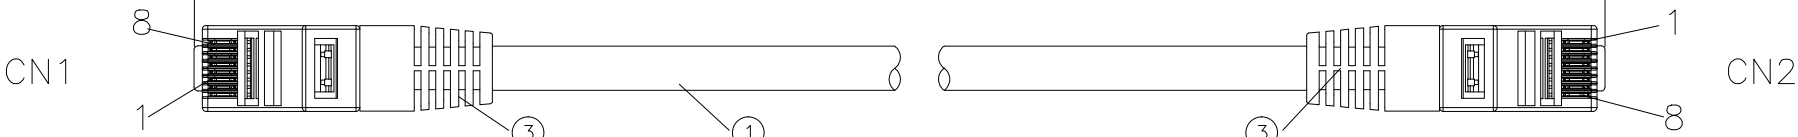

B

B

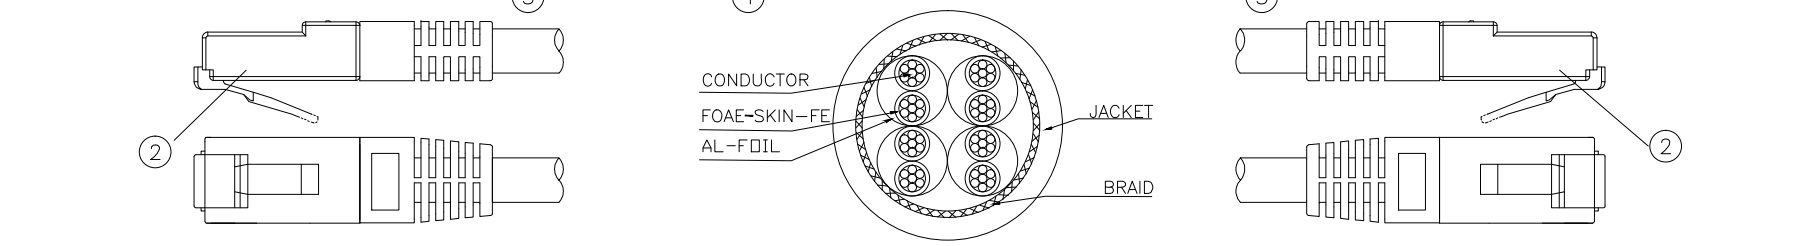

C

C

D

D

PIN OUT		
CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

tolerance

Length (Meter)	Max-M	Mix-M
0.5	0.03	0.025
1	0.04	0.035
2	0.06	0.06
3	0.09	0.09
5	0.15	0.15
7	0.21	0.21
10	0.3	0.3
15	0.45	0.45
20	0.6	0.6
30	0.9	0.9

Order code: A-MCSSP60XXX/X

order lengths in meter: 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30
 order color: (R)Red, (Y)Yellow, (G)Green, (B)Blue

Electrical test:
 Open/Short/intermittence: 100%

NO.	NAME.	Q'TY	SPECIFICATION
3	Molding PVC	2	Molding PVC 45P
2	RJ45 CONN	2	RJ45 8P8C, Two Fork gold plated contacts 3u" with metal housing
1	CABLE	1	SSTP(26AWG*1PR-A)*4+B+PVC OD:5.8±0.2mm

G

G

RoHS compliant
 Unit: mm

H

H

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	01.02.2016	Joanna
					Approved	01.02.2016	Joanna
DIM	TOL						ASSMANN WSW-No. A-MCSSP60XXX/X
							Drawing-No. ASS 7542 CA
		①	Drawn	01.02.2016	Joanna		rev00
Angle	TOL	Id.	Modification	Date	Name		Sheet



1 2 3 4 5 6 7