


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

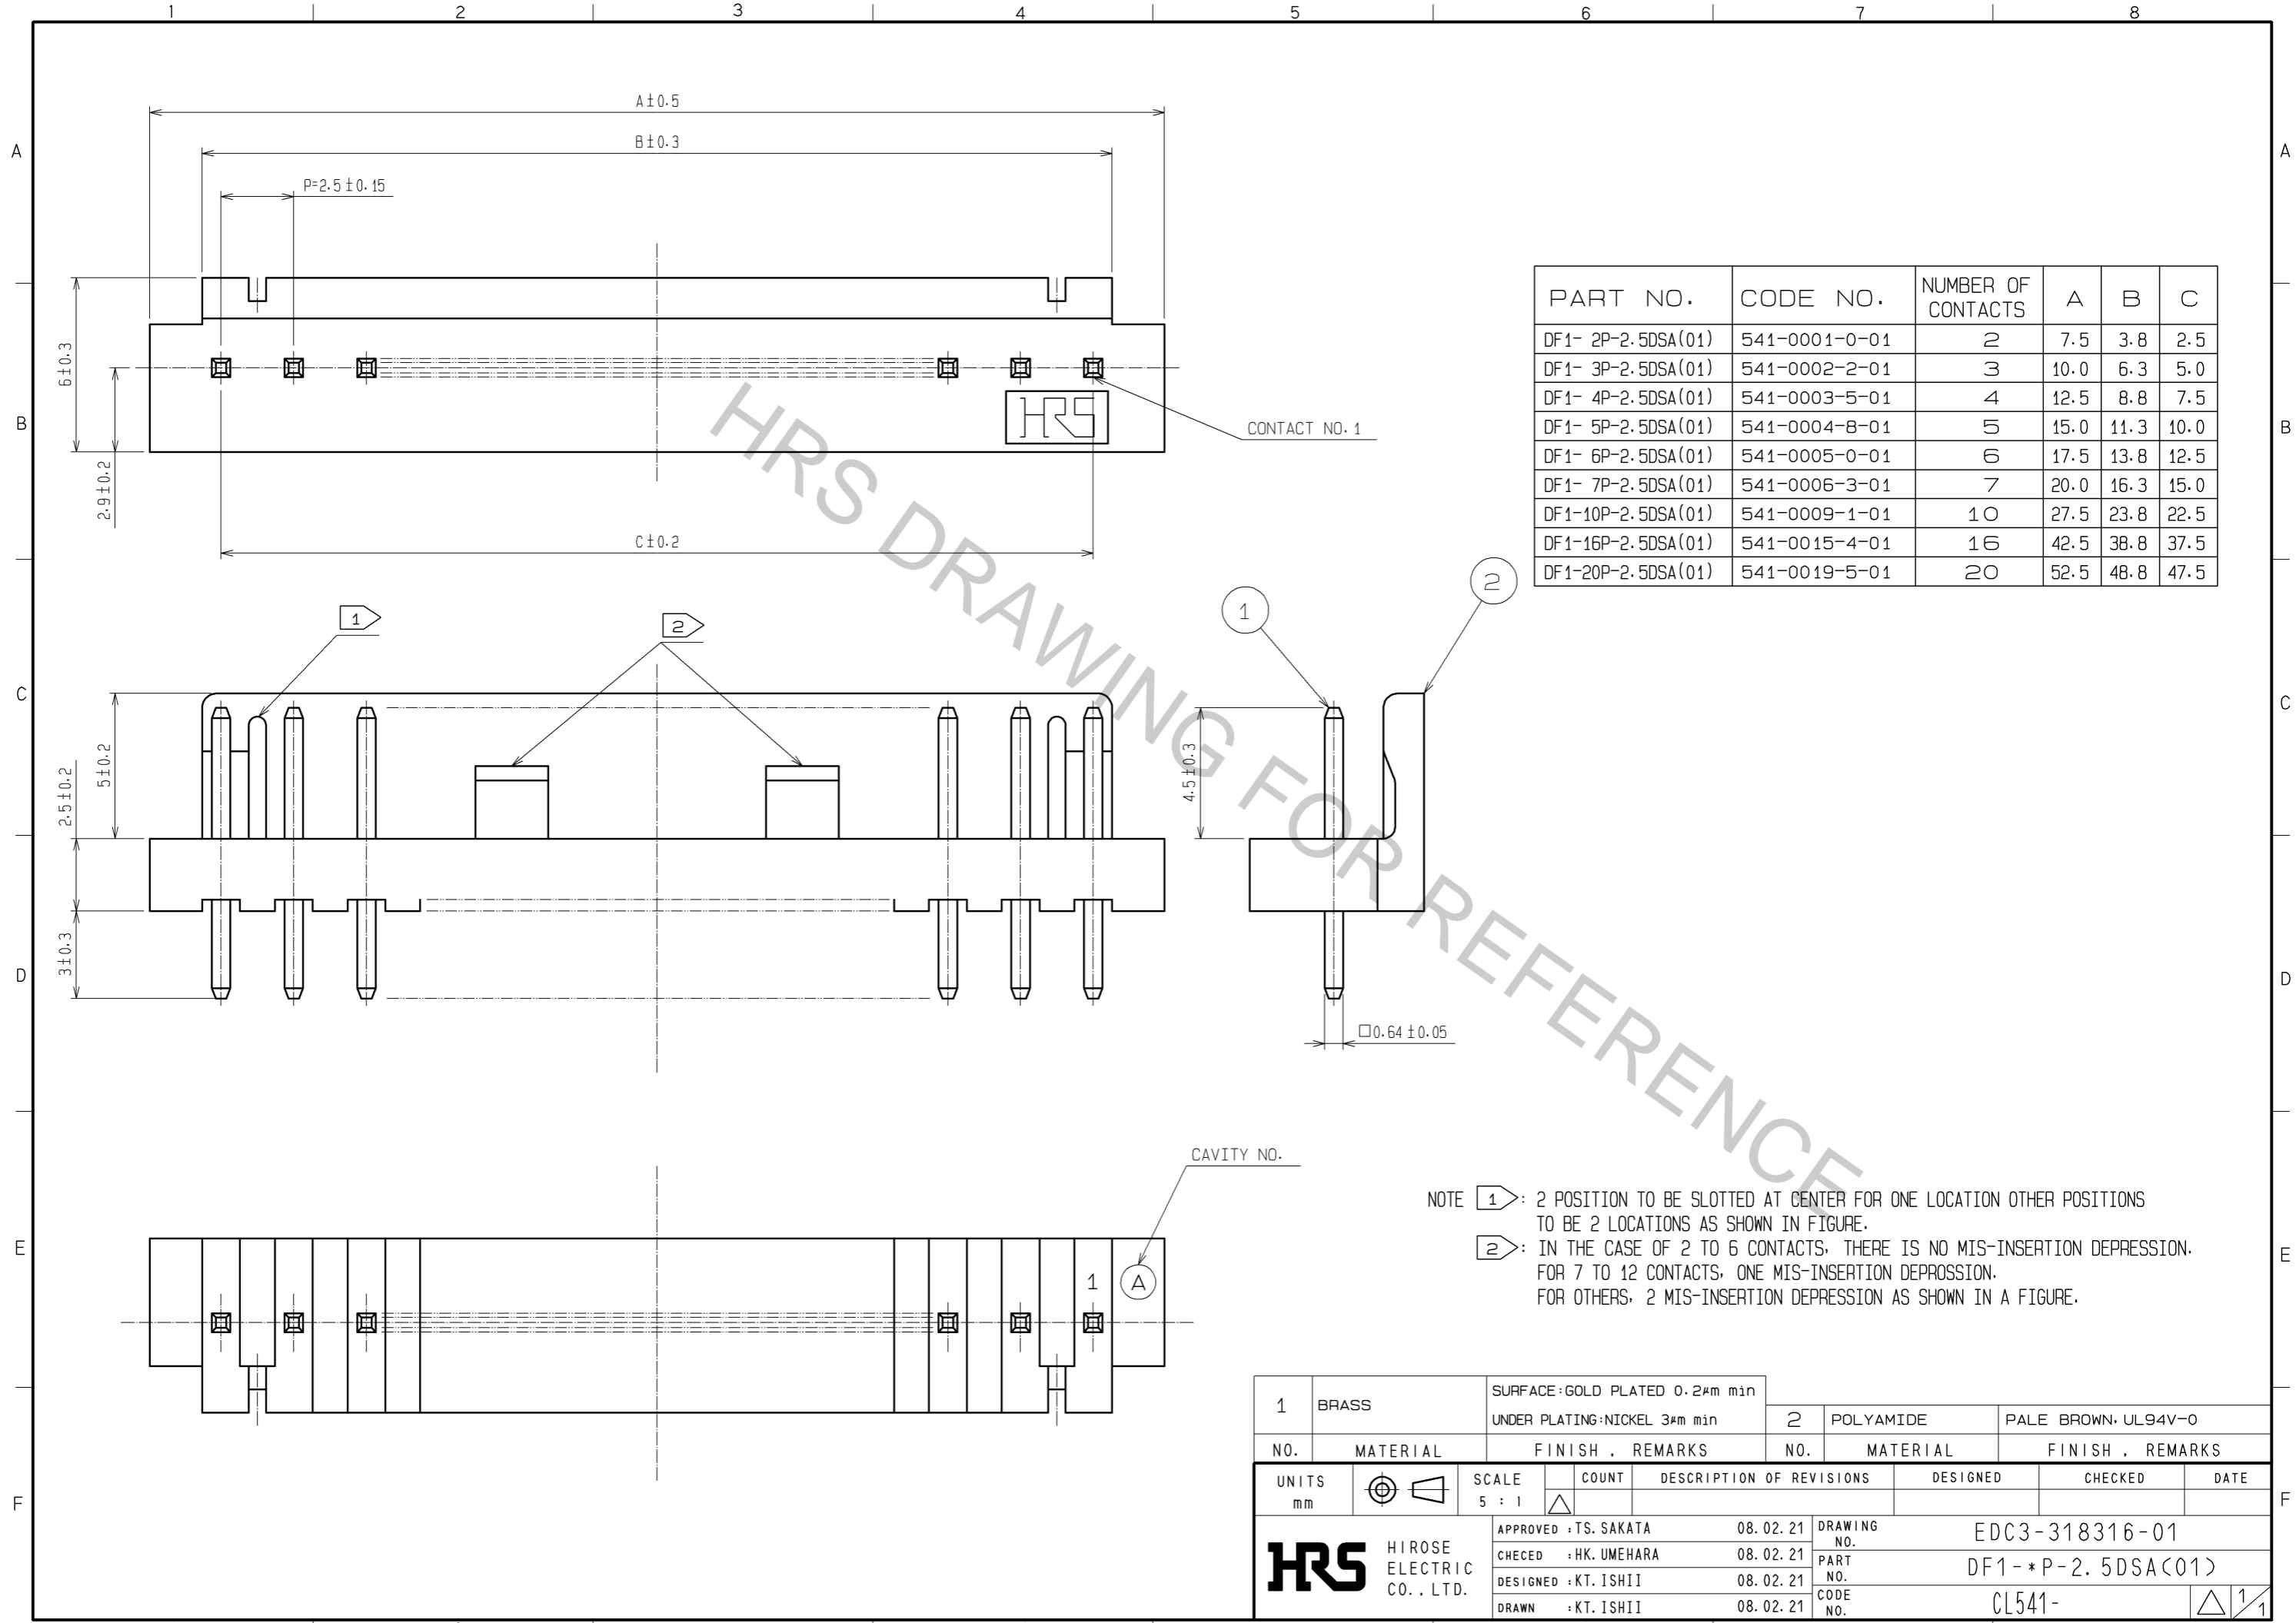

PART NO.	CODE NO.	NUMBER OF CONTACTS	A	B	C
DF1- 2P-2.5DSA(01)	541-0001-0-01	2	7.5	3.8	2.5
DF1- 3P-2.5DSA(01)	541-0002-2-01	3	10.0	6.3	5.0
DF1- 4P-2.5DSA(01)	541-0003-5-01	4	12.5	8.8	7.5
DF1- 5P-2.5DSA(01)	541-0004-8-01	5	15.0	11.3	10.0
DF1- 6P-2.5DSA(01)	541-0005-0-01	6	17.5	13.8	12.5
DF1- 7P-2.5DSA(01)	541-0006-3-01	7	20.0	16.3	15.0
DF1-10P-2.5DSA(01)	541-0009-1-01	10	27.5	23.8	22.5
DF1-16P-2.5DSA(01)	541-0015-4-01	16	42.5	38.8	37.5
DF1-20P-2.5DSA(01)	541-0019-5-01	20	52.5	48.8	47.5

NOTE ①: 2 POSITION TO BE SLOTTED AT CENTER FOR ONE LOCATION OTHER POSITIONS TO BE 2 LOCATIONS AS SHOWN IN FIGURE.
 ②: IN THE CASE OF 2 TO 6 CONTACTS, THERE IS NO MIS-INSERTION DEPRESSION. FOR 7 TO 12 CONTACTS, ONE MIS-INSERTION DEPRESSION. FOR OTHERS, 2 MIS-INSERTION DEPRESSION AS SHOWN IN A FIGURE.

1	BRASS	SURFACE:GOLD PLATED 0.2μm min	2	POLYAMIDE	PALE BROWN:UL94V-0		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA	08.02.21	DRAWING NO.	EDC3-318316-01		
		CHECKED : HK. UMEHARA	08.02.21	PART NO.	DF1- * P-2.5DSA(01)		
		DESIGNED : KT. ISHII	08.02.21	CODE NO.	CL541-		
		DRAWN : KT. ISHII	08.02.21		1/1		