


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-----------------------|-----------|-----------|------|--|--|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| | C | REV; EC 0210-0674-95 | 10-25-95 | LM/UTA | | | |
| | D | REV PER EC 0320-68-97 | 06 MAR 97 | MB | MM | | |
| | E | REV PER EC 061C-95-98 | 14 JUL 98 | CO | MC | | |

- 1. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2. MATERIAL: 2.54μm [0.000100] MINIMUM TIN PLATED COPPER ALLOY 0.74-0.79 [0.030±.001] THICK.
- 3. WIRE BARREL ACCEPTS ONE 14, 16 OR 18 AWG STRANDED COPPER WIRE.
- 4. CONTACTS ON REEL SHALL BE CRIMPED USING APPLICATOR TOOL PN 567403.
- 5. LOOSE PIECE CONTACTS SHALL BE CRIMPED USING TOOLS AND DIE SETS LISTED BELOW.
 HAND TOOL: AMP PART NO. 69710
 PNEUMATIC TOOL: AMP PART NO. 69365
 DIE SET 14 AWG: AMP PART NO. 58492-1
 DIE SET 16-18 AWG: AMP PART NO. 58493-1

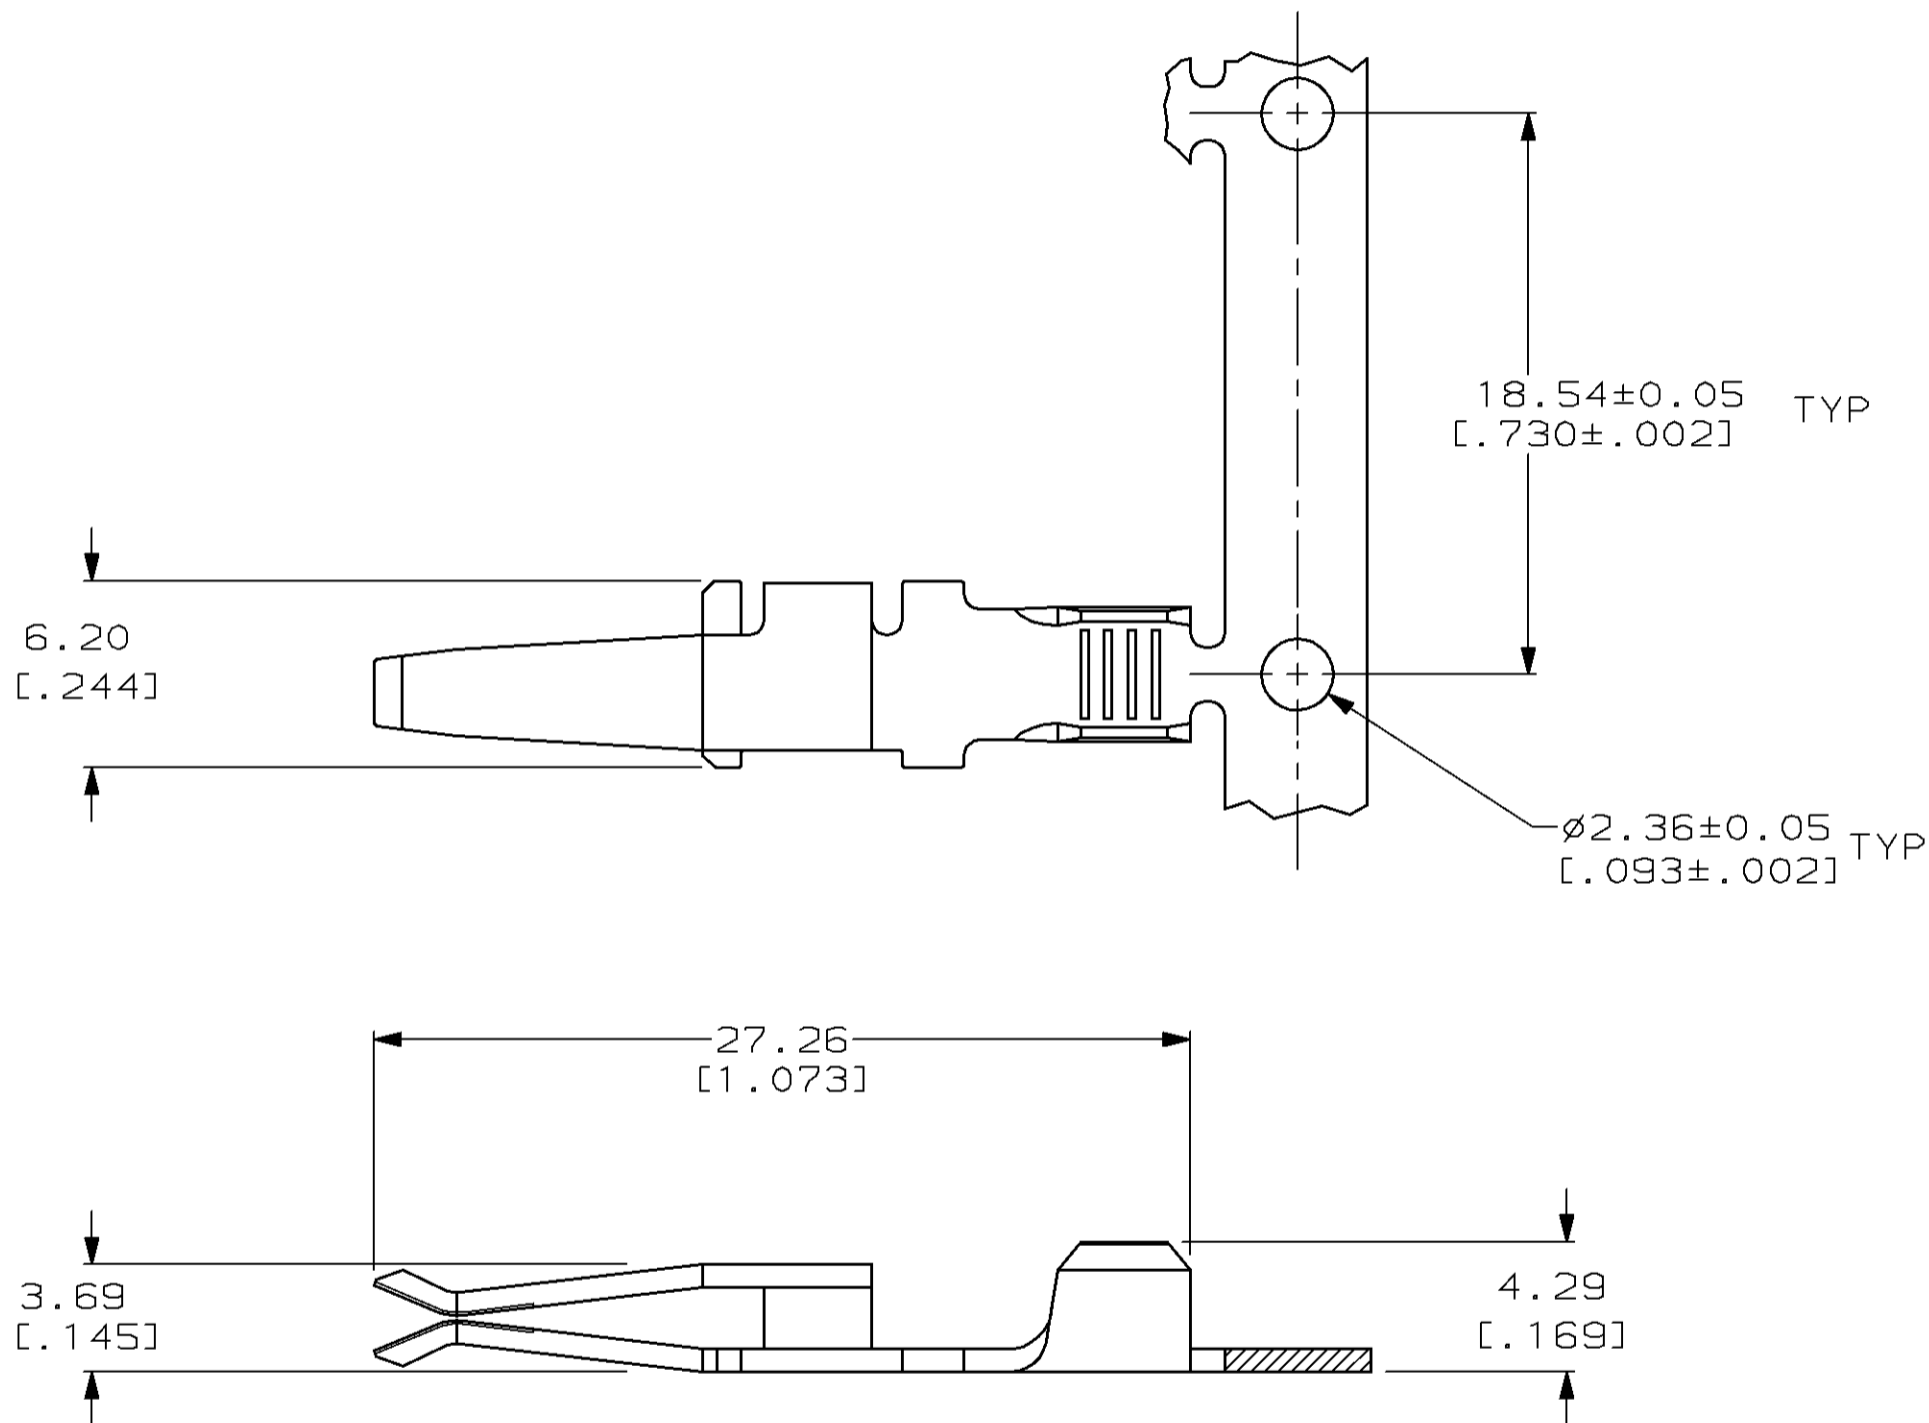

| | |
|---------------|----------|
| REEL 4 | 556883-2 |
| LOOSE PIECE 5 | 556883-1 |
| DESCRIPTION | PART NO |

| | | | | | |
|--|--|---|--|--|--|
| <small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small> | | DWN 5-29-91 D. STRAUSSER CHK 8-23-91 B. FOX APVD 8-26-91 M. MILLER | | AMP AMP Incorporated Harrisburg, PA 17105-3608 | |
| DIMENSIONS: mm [INCHES] | | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ± | | NAME CONTACT, DUAL BEAM, 14-18 AWG, WTB, AMPINNERGY™ | |
| | | PRODUCT SPEC 108-1349 | | SIZE A2 | |
| MATERIAL 2 | | APPLICATION SPEC 114-6044 | | CAGE CODE 00779 | |
| | | WEIGHT - | | DRAWING NO C-556883 | |
| CUSTOMER DRAWING | | | | SCALE 4:1 SHEET 1 OF 1 REV E | |

556883

□

A