


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: 9260COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 UL W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

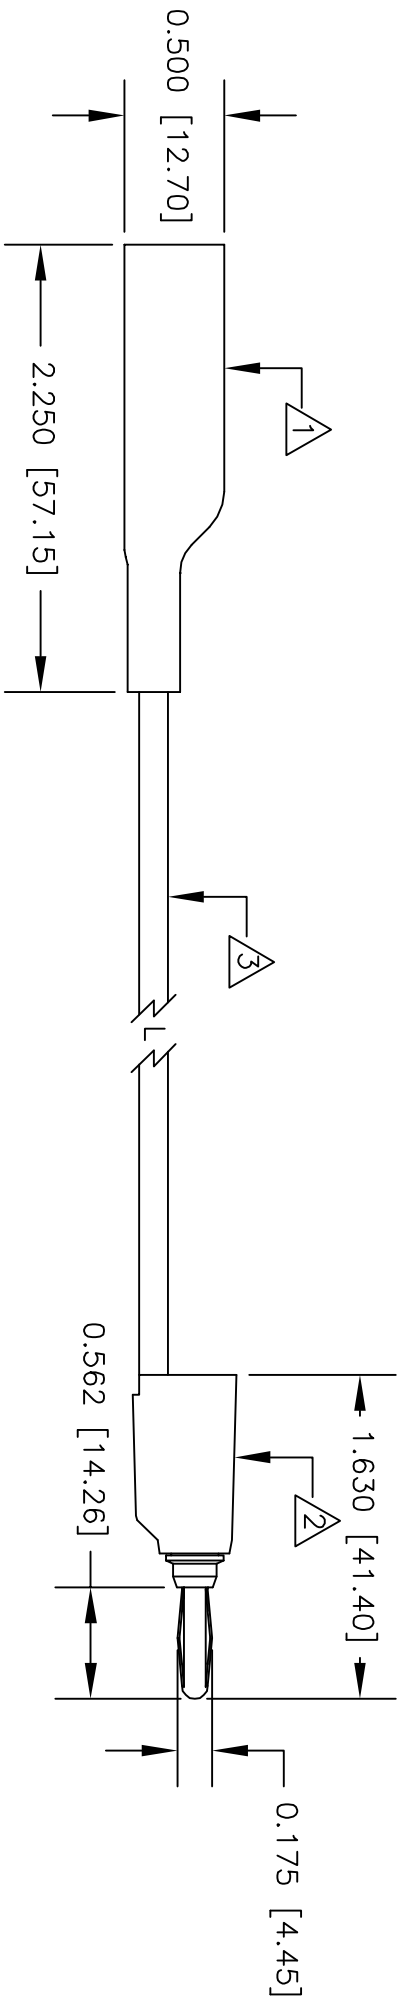

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES

CONTRACT NO.		APPROVALS		DATE	
DRAWN		APPROVED BY		R.L. 11/10	
MATERIAL		FINISH		REV.	
SEE NOTE.		SEE NOTE.			
NEXT ASSY		USED ON			
APPLICATION		DO NOT SCALE DRAWING		SCALE	
				1:1	
				SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

**EZ-HOOK** DIVISION OF TEKTEST INC.  
ARCADIA, CA 91006 U.S.A.

DESCRIPTION  
STD ALLIGATOR (9274) TO  
STK BAN PLUG (9260)

SIZE CODE IDENT NO. DRAWING NO.  
A 08505 681