


REV. A  
DCO 144519

COIL: @ 25°C  
 RESISTANCE 44 OHMS ±10%  
 NOMINAL VOLTAGE 5.0 VDC  
 MUST OPERATE 2.4 VDC  
 MUST RELEASE 1.45 VDC MAX, 0.26 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 Hz TO 3000 Hz @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

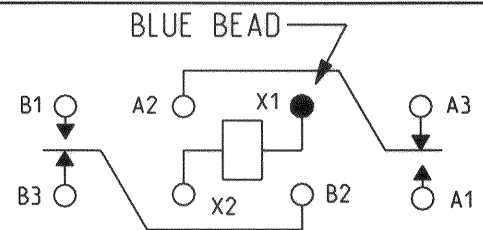

TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_  
 LOW LEVEL TO 2A 28VDC RES..  
 100,000 OPS

DR. B.D. 11SEP2008

CK. *[Signature]*

**Tyco Electronics**

©COPYRIGHT 2005  
 TYCO ELECTRONICS CORPORATION  
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL  
 CUST. NO. M39016/13-073P REV. \_\_\_\_\_

TE NUMBER  
 2-1617073-1

CII PART NUMBER

3SBC2018A2