

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±R25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4PA00	D09S80C6PA00
15	39.14	33.32	26.32	24.54	19.18	D15S80C4PA00	D15S80C6PA00
25	53.03	47.04	40.04	38.25	33.12	D25S80C4PA00	D25S80C6PA00
37	69.32	63.50	56.50	54.71	49.68	D37S80C4PA00	D37S80C6PA00


Gold flash

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±R25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4PA00LF	D09S80C6PA00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4PA00LF	D15S80C6PA00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4PA00LF	D25S80C6PA00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4PA00LF	D37S80C6PA00LF

Gold flash

PC cord drilling dimensions(after plating)  
(thickness 1.60 ±0.25 mm)

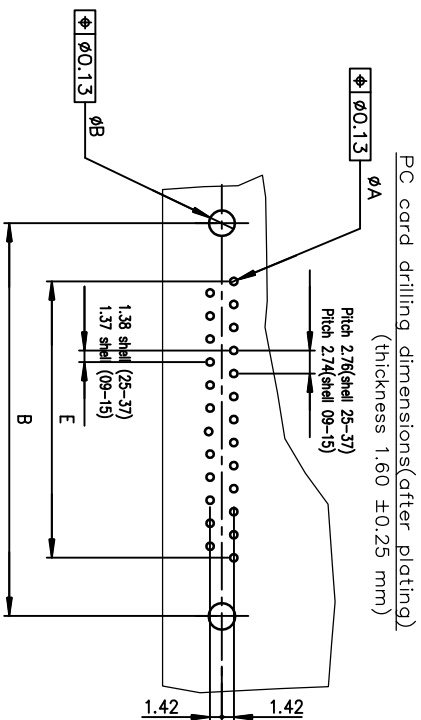

mat'l. code

ISO 1302	tolerance	ISO 406	ISO 1101	projection
Ltr ecn no	dr	date	tolerance unless otherwise specified	linear
G	BU-17899	MP	2014/06/06	0.0±0.1
				0.00±0.1
				scale 2:1

product family D-SUB

title FEMALE CONNECTOR DELTA-D US  
RIGHT ANGLED PRESS FIT

dwg no C01-8646-0414 sheet 1 of 1 size A3

engr WITHUN PAUL 2014/06/06  
chr ALIAS BABU 2014/06/06  
dppd BIJU K PAUL 2014/06/06

sheet index	revision	sheet
1	G	1