



WSW P/N	Length	⑥ PE BAG	⑦ PE BAG
AK-CHMM-2	2000±50	130*230*0.05mm	280*330*0.05mm
AK-CHMM-015	1500±30	130*230*0.05mm	280*330*0.05mm
AK-CHMM-025	2500±50	130*230*0.05mm	280*330*0.05mm
AK-CHMM-050	5000±50	180*280*0.05mm	330*380*0.05mm

Electrical test:
 1. 100% short, open, miss wire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

PIN ASSIGNMENT:



⑧	TIE	2	BLACK
⑦	PE BAG	1/10	CLEAR PRINT BLACK"MADE IN CHINA+"10PCS"
⑥	PE BAG	1	CLEAR PRINT BLACK"MADE IN CHINA+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NW-006)
③	OUT JACKET	6.6g	CLEAR LD-PE (Mould NO.:NW-009)
②	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NW-006)
①	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO. WM-009)
①	CABLE CONN	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	NAME	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN

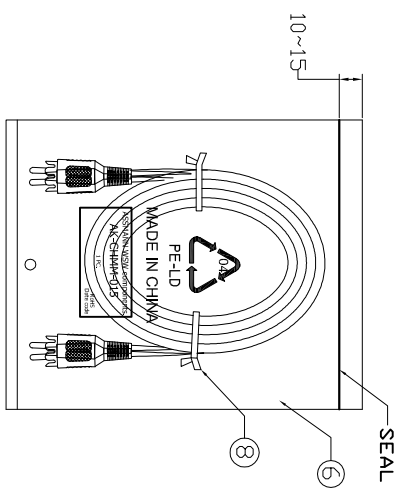

RoHS compliant
 Unit: mm

Scale	Free	Customer-No.	Date	Name
TOLERANCE		Drawn	20.02.2017	Amy
		Approved	20.02.2017	Amy
DIM	TOL	ASSMANN WSW-No. AK-CHMM-XX		
Angle	TOL	Drawing-No. ASS 7867 CA		
		Replace Sheet		
Id.	Modification	Drawing-No. ASS 7867 CA rev00		
①	Drawn	Date 20.02.2017 Name Amy		



1	2	3	4	5	6	7
A	B	C	D	E	F	G
H	G	F	E	D	C	B
1	2	3	4	5	6	7
H	G	F	E	D	C	B