


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
NUMMER	825435		E	WERKSTOFF GEÄNDERT	10.07.97	—	A.ZITZ
VERWENDET FÜR	E 75-9233		E1	REVISED PER ECO-09-023313	09OCT09	—	AEG
WAR	—		E2	ECR-10-022530	07JAN11	KK	HMR

POLZ.	L±0.5	BESTELL-NR.
—	—	—
2	5.08	825 435 -2
3	7.62	— -3 ³
4	10.16	— -4
5	12.70	— -5 ³
6	15.24	— -6 ³
7	17.78	— -7
8	20.32	— -8 ³
9	22.86	— -9 ³
10	25.40	1- -0 ³
11	27.94	1- -1
12	30.48	1- -2
13	33.02	1- -3
14	35.56	1- -4 ³
15	38.10	1- -5
16	40.64	1- -6
17	43.18	1- -7
18	45.72	1- -8
19	48.26	1- -9
20	50.80	2- -0 ³
21	53.34	2- -1 ²
22	55.88	2- -2 ³
23	58.42	2- -3
24	60.96	2- -4
25	63.50	2- -5
26	66.04	2- -6
27	68.58	2- -7 ³
28	71.12	2- -8
29	73.66	2- -9 ³
30	76.20	3- -0 ³
31	78.74	3- -1
32	81.28	3- -2
33	83.82	3- -3
34	86.36	3- -4
35	88.90	3- -5
36	91.44	3- -6
37	93.98	3- -7 ³
38	96.52	3- -8
39	99.06	3- -9
40	101.60	4- -0
41	104.14	4- -1
42	106.68	4- -2
43	109.22	4- -3
44	111.76	4- -4
45	114.30	4- -5
46	116.84	4- -6
47	119.38	4- -7
48	121.92	4- -8
49	124.46	4- -9
50	127.00	5- 825 435 -0

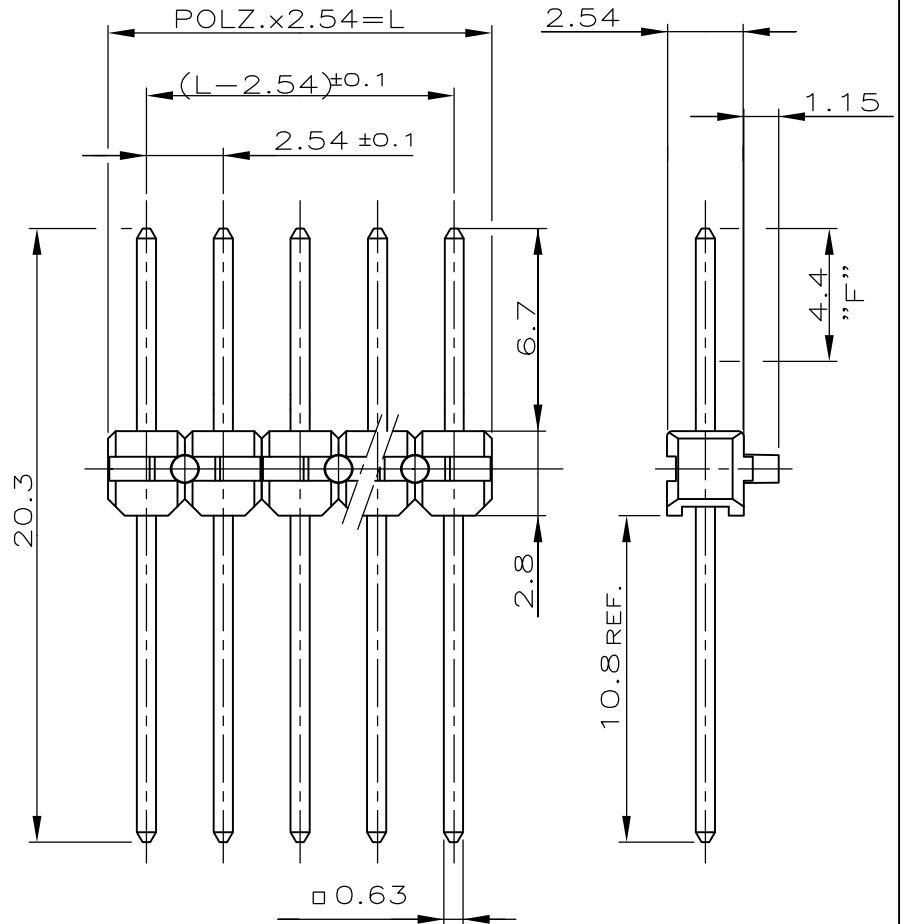

- ① STECKSEITE: IM BEREICH "F" 0.8 μm GOLD ÜBER 1.27 μm NICKEL
LÖTSEITE: MIN. 2.5 μm ZINN ÜBER 1.27 μm NICKEL
- ② OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- ③ OBSOLETE

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	Cu Sn	①
STIFTGEHÄUSE	PBT GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB KW 39/96

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT - By - ALL RIGHTS RESERVED.

DIMENSIONS: mm	DWN	A.HO	11.04.84	MATERIAL	—	FINISH	—
	CHK	M.SCHAARSCHMIDT	11.04.84	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm	APVD	—	—				
0 PLC ± -	PRODUCT SPEC	—	NAME	AMPMODU II STIFTLISTE EINREIHIG			
1 PLC ± -	APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	—
2 PLC ± -	WEIGHT	—	A4	00779	825435	—	—
3 PLC ± -	CUSTOMER DRAWING		—	SCALE	4:1	SHEET	1 OF 1
4 PLC ± -						REV	E2
ANGLES ± -							

