


## ATV04A5V0-HF Thru. ATV04A441-HF

Working Peak Reverse Voltage: 5.0 to 440 Volts

Power Dissipation: 400 Watts

RoHS Device

Halogen Free




### Features

- Glass passivated chip.
- 400W peak pulse power capability with a 10/1000  $\mu$ s waveform, repetitive rate (duty cycle):0.01%
- Low leakage.
- Uni and Bidirectional unit.
- Excellent clamping capability.
- Very fast response time.
- Comply with AEC-Q101

### Mechanical data

- Epoxy: UL 94V-0 rate flame retardant.
- Case: SMA/DO-214AC, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end except Bipolar.
- Approx. weight: 0.064 grams

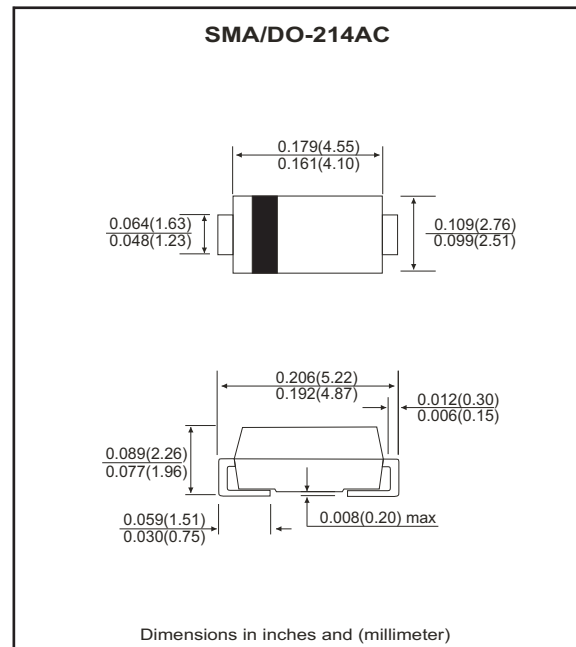

### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristics	Symbol	Value	Units
Peak power dissipation on 10/1000 $\mu$ S waveform (Note1)	P <sub>PPM</sub>	400	W
Peak pulse current on 10/1000 $\mu$ S waveform (Note 1)	I <sub>PPM</sub>	See Next Table	A
Steady state power dissipation at T <sub>L</sub> =75°C	P <sub>M(AV)</sub>	1.0	W
Peak forward surge current, 8.3mS single half sine-wave unidirectional only (Note 2)	I <sub>FSM</sub>	40	A
Maximum instantaneous forward voltage at 25.0A for unidirectional only (Note 3)	V <sub>F</sub>	3.5/5.0	V
Maximum operating junction temperature	T <sub>J</sub>	-55 to +150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C

Notes:

1. Non-repetitive current pulse, per Fig. 5 and derated above T<sub>A</sub>=25°C, per Fig. 1.
2. Measured on 8.3mS single half sine-wave or equare wave, duty cycle=4 pulses per minute maximum.
3. V<sub>F</sub><3.5V for devices of V<sub>BR</sub><200V and V<sub>F</sub><5.0V for devices of V<sub>BR</sub>>201V

## RATING AND CHARACTERISTIC CURVES (ATV04A5V0-HF thru ATV04A441-HF)

Fig.1- Pulse Derating Curve

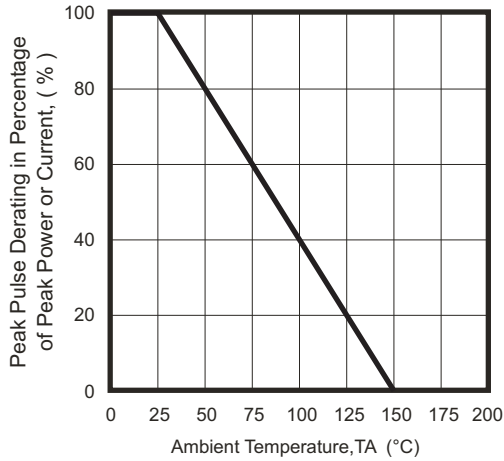


Fig.2- Maximum Non-Repetitive Surge Current

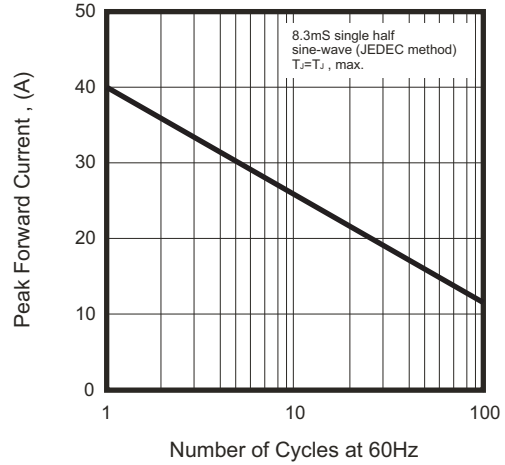


Fig.3- Steady State Power Derating Curve

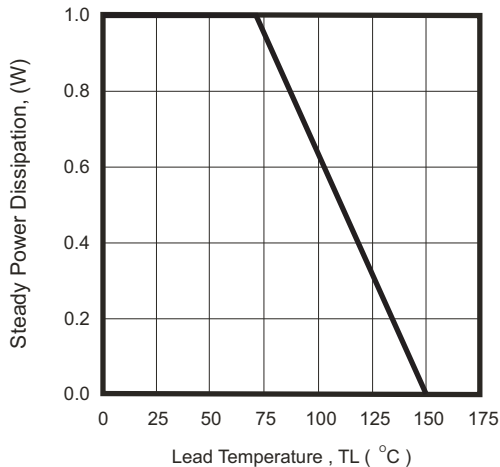


Fig.4- Peak Pulse Power Rating Curve

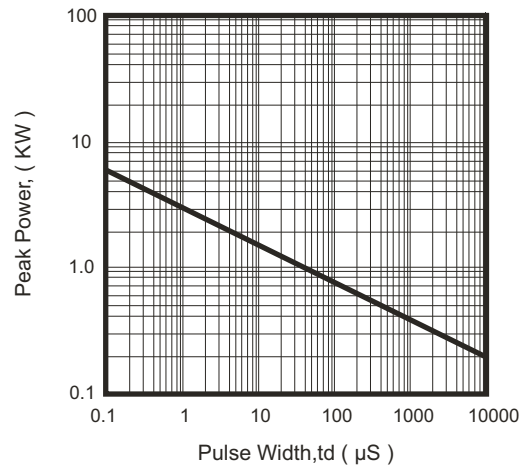


Fig.5- Pulse Waveform


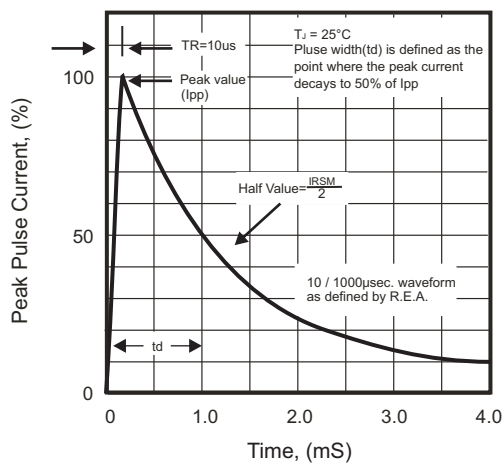


Fig.6- Typical Junction Capacitance



# SMD Transient Voltage Suppressor

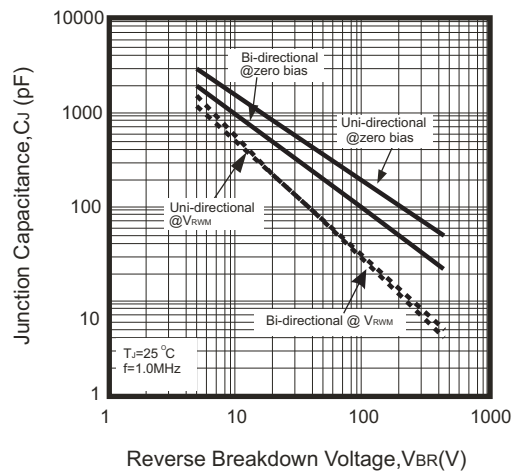

## Electrical Characteristics (ATV04A5V0-HF Thru. ATV04A441-HF)

Part No	Absolute Maximum Rating (Ta=25°C)					Electrical Characteristic (Ta=25°C)				
	V <sub>RWM</sub>	V <sub>BR</sub> Min.	V <sub>BR</sub> Max.	I <sub>T</sub>	I <sub>FSM</sub>	Max. V <sub>C</sub>		I <sub>R</sub> @ V <sub>RWM</sub>	Marking Code	
	(V)	(V)	(V)	(mA)	(A)@8.3mS	(V)	I <sub>PP</sub> (A)	( $\mu$ A)	Uni	Bi
ATV04A4V0J(B)-HF	4.00	5.89	6.51	10	40	8.60	46.50	800	AC	WC
ATV04A5V0J(B)-HF	5.00	6.40	7.00	10	40	9.20	43.48	800	AE	WE
ATV04A6V0J(B)-HF	6.00	6.67	7.37	10	40	10.3	38.83	800	AG	WG
ATV04A6V5J(B)-HF	6.50	7.22	7.98	10	40	11.2	35.71	500	AK	WK
ATV04A7V0J(B)-HF	7.00	7.78	8.60	10	40	12.0	33.33	200	AM	WM
ATV04A7V5J(B)-HF	7.50	8.33	9.21	1	40	12.9	31.01	100	AP	WP
ATV04A8V0J(B)-HF	8.00	8.89	9.83	1	40	13.6	29.41	50	AR	WR
ATV04A8V5J(B)-HF	8.50	9.44	10.40	1	40	14.4	27.78	10	AT	WT
ATV04A9V0J(B)-HF	9.00	10.00	11.10	1	40	15.4	25.97	5	AV	VV
ATV04A100J(B)-HF	10.0	11.10	12.30	1	40	17.0	23.53	5	AX	WX
ATV04A110J(B)-HF	11.0	12.20	13.50	1	40	18.2	21.98	1	AZ	WZ
ATV04A120J(B)-HF	12.0	13.30	14.70	1	40	19.9	20.10	1	BE	XE
ATV04A130J(B)-HF	13.0	14.40	15.90	1	40	21.5	18.60	1	BG	XG
ATV04A140J(B)-HF	14.0	15.60	17.20	1	40	23.2	17.24	1	BK	XK
ATV04A150J(B)-HF	15.0	16.70	18.50	1	40	24.4	16.39	1	BM	XM
ATV04A160J(B)-HF	16.0	17.80	19.70	1	40	26.0	15.38	1	BP	XP
ATV04A170J(B)-HF	17.0	18.90	20.90	1	40	27.6	14.49	1	BR	XR
ATV04A180J(B)-HF	18.0	20.00	22.10	1	40	29.2	13.70	1	BT	XT
ATV04A190J(B)-HF	19.0	21.10	23.30	1	40	30.8	13.00	1	BB	XB
ATV04A200J(B)-HF	20.0	22.20	24.50	1	40	32.4	12.35	1	BV	XV
ATV04A220J(B)-HF	22.0	24.40	26.90	1	40	35.5	11.27	1	BX	XX
ATV04A240J(B)-HF	24.0	26.70	29.50	1	40	38.9	10.28	1	BZ	XZ
ATV04A260J(B)-HF	26.0	28.90	31.90	1	40	42.1	9.50	1	CE	YE
ATV04A280J(B)-HF	28.0	31.10	34.40	1	40	45.4	8.81	1	CG	YG
ATV04A300J(B)-HF	30.0	33.30	36.80	1	40	48.4	8.26	1	CK	YK
ATV04A330J(B)-HF	33.0	36.70	40.60	1	40	53.3	7.50	1	CM	YM
ATV04A360J(B)-HF	36.0	40.00	44.20	1	40	58.1	6.88	1	CP	YP
ATV04A400J(B)-HF	40.0	44.40	49.10	1	40	64.5	6.20	1	CR	YR
ATV04A430J(B)-HF	43.0	47.80	52.80	1	40	69.4	5.76	1	CT	YT
ATV04A450J(B)-HF	45.0	50.00	55.30	1	40	72.7	5.50	1	CV	YV
ATV04A480J(B)-HF	48.0	53.30	58.90	1	40	77.4	5.17	1	CX	YX
ATV04A510J(B)-HF	51.0	56.70	62.70	1	40	82.4	4.85	1	CZ	YZ
ATV04A540J(B)-HF	54.0	60.00	66.30	1	40	87.1	4.59	1	RE	ZE
ATV04A580J(B)-HF	58.0	64.40	71.20	1	40	93.6	4.27	1	RG	ZG
ATV04A600J(B)-HF	60.0	66.70	73.70	1	40	96.8	4.13	1	RK	ZK
ATV04A640J(B)-HF	64.0	71.10	78.60	1	40	103.0	3.88	1	RM	ZM
ATV04A700J(B)-HF	70.0	77.80	86.00	1	40	113.0	3.54	1	RP	ZP
ATV04A750J(B)-HF	75.0	83.30	92.10	1	40	121.0	3.31	1	RR	ZR
ATV04A780J(B)-HF	78.0	86.70	95.80	1	40	126.0	3.17	1	RT	ZT
ATV04A800J(B)-HF	80.0	88.80	97.60	1	40	129.6	3.09	1	RB	ZB
ATV04A850J(B)-HF	85.0	94.40	104.00	1	40	137.0	2.92	1	RV	ZV
ATV04A900J(B)-HF	90.0	100.00	111.00	1	40	146.0	2.74	1	RX	ZX
ATV04A101J(B)-HF	100.0	111.00	123.00	1	40	162.0	2.47	1	RZ	ZZ
ATV04A111J(B)-HF	110.0	122.00	135.00	1	40	177.0	2.26	1	SE	VE
ATV04A121J(B)-HF	120.0	133.00	147.00	1	40	193.0	2.07	1	SG	VG
ATV04A131J(B)-HF	130.0	144.00	159.00	1	40	209.0	1.91	1	SK	VK
ATV04A141J(B)-HF	140.0	155.00	171.00	1	40	226.8	1.76	1	SB	VB
ATV04A151J(B)-HF	150.0	167.00	185.00	1	40	243.0	1.65	1	SM	VM
ATV04A161J(B)-HF	160.0	178.00	197.00	1	40	259.0	1.54	1	SP	VP
ATV04A171J(B)-HF	170.0	189.00	209.00	1	40	275.0	1.45	1	SR	VR
ATV04A181J(B)-HF	180.0	200.00	220.00	1	40	291.6	1.37	1	ST	VT
ATV04A191J(B)-HF	190.0	211.00	232.00	1	40	307.8	1.30	1	SV	VV

Company reserves the right to improve product design, functions and reliability without notice.

REV.A

# SMD Transient Voltage Suppressor


## Electrical Characteristics (ATV04A5V0-HF Thru. ATV04A441-HF )

Part No.	Absolute Maximum Rating (T <sub>A</sub> =25°C)					Electrical Characteristic (T <sub>A</sub> =25°C)				
	V <sub>RWM</sub>	V <sub>BR</sub> Min.	V <sub>BR</sub> Max.	I <sub>T</sub>	I <sub>FSM</sub>	Max V <sub>C</sub>	I <sub>R</sub> @V <sub>RWM</sub>	Marking Code		
	(V)	(V)	(V)	(mA)	(A)@8.3mS	(V)	I <sub>PP</sub> (A)	(uA)	Uni	Bi
ATV04A201J(B)-HF	200.0	224.00	247.00	1	40	324.0	1.23	1	SW	VW
ATV04A221J(B)-HF	220.0	246.00	272.00	1	40	356.0	1.12	1	SX	VX
ATV04A251J(B)-HF	250.0	279.00	309.00	1	40	405.0	0.99	1	SZ	VZ
ATV04A301J(B)-HF	300.0	335.00	371.00	1	40	486.0	0.82	1	DE	HE
ATV04A351J(B)-HF	350.0	391.00	432.00	1	40	567.0	0.71	1	DG	HG
ATV04A401J(B)-HF	400.0	447.00	494.00	1	40	648.0	0.62	1	DK	HK
ATV04A441J(B)-HF	440.0	492.00	543.00	1	40	713.0	0.56	1	DM	HM

Note:

- 1) Suffix J denotes 5% tolerance devices.
- 2) Suffix B after part number to specify Bi-directional devices.
- 3) For Bi-Directional devices having V<sub>R</sub> of 10 volts and under, the I<sub>R</sub> limit is double.

## Reel Taping Specification

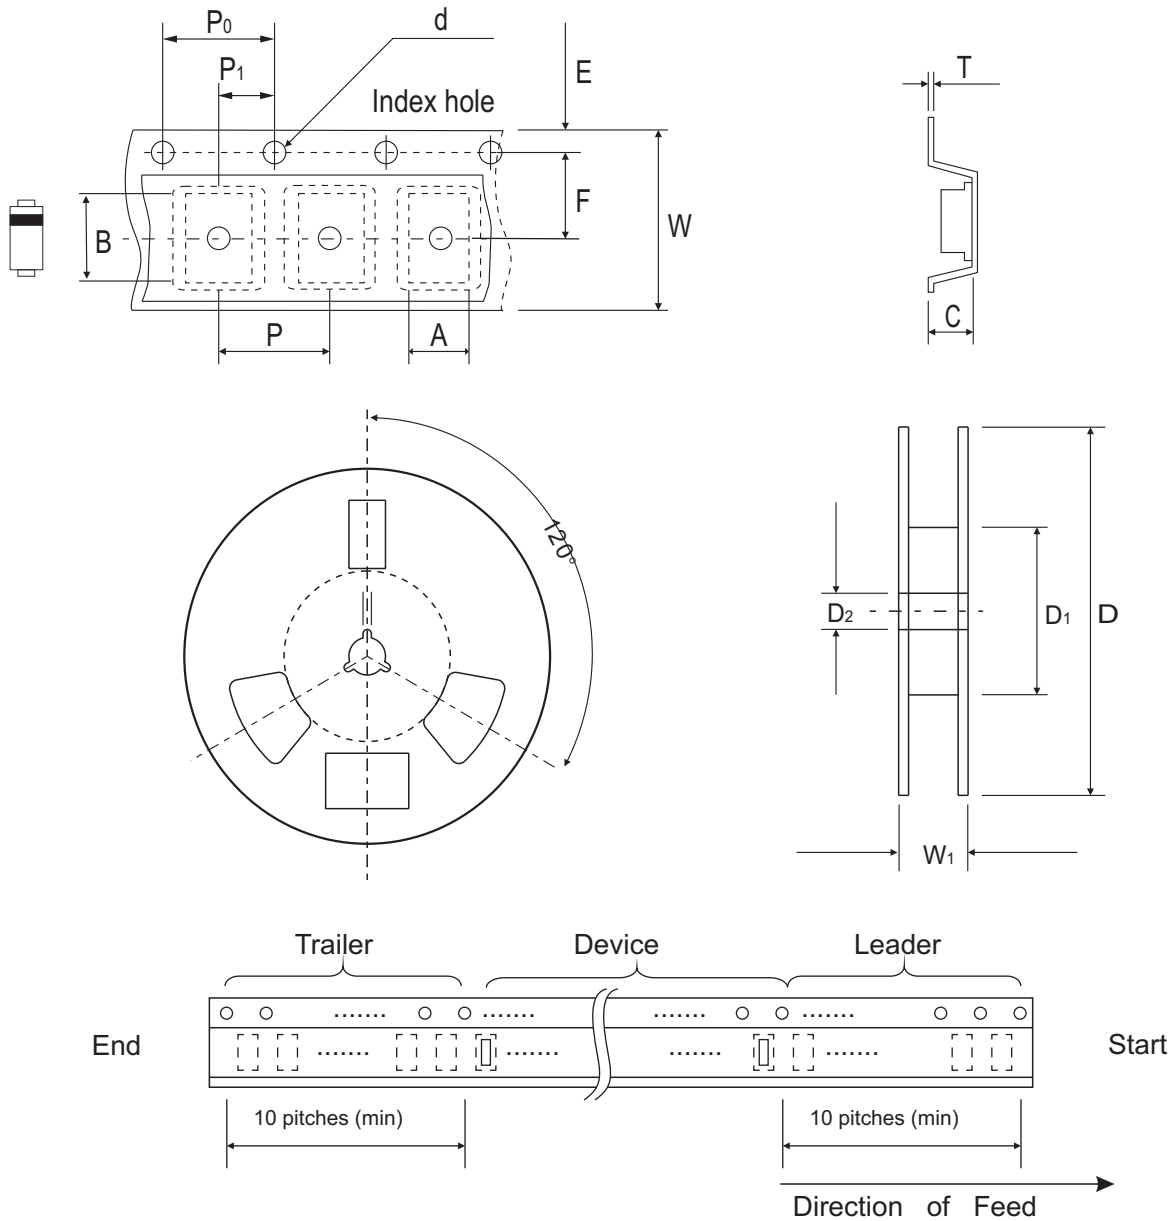

SMA/DO-214AC	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.79 ± 0.10	5.33 ± 0.10	4.50 (max)	1.75 ± 0.10	330MAX	50.0 MIN.	13.0 ± 0.2
	(inch)	0.110 ± 0.004	0.210 ± 0.004	0.177 (max)	0.069 ± 0.004	13.00MAX	1.969 MIN.	0.512 ± 0.008


SMA/DO-214AC	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.0 ± 0.30	18.4 MAX.
	(inch)	0.069 ± 0.004	0.216 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.012	0.724 MAX.

## Marking Code

1. C: COMCHIP
2. ○: Package


○	PKG
A	SMA
B	SMB
C	SMC

3. XX: Marking code(see Page. 3~5)
4. Cathod Band

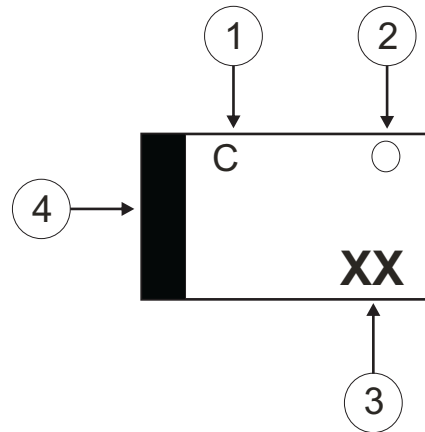

## Suggested PAD Layout

SIZE	DO-214AC(SMA)	
	(mm)	(inch)
A	5.28	0.208
B	1.88 MAX	0.074 MAX
C	1.52 MIN	0.060 MIN
D	1.68 MIN	0.066 MIN

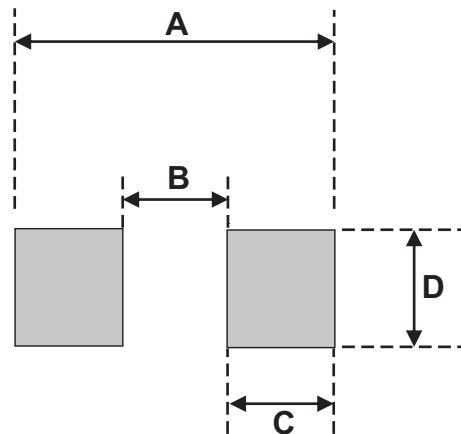

## Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
SMA/DO-214AC	5,000	13