


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

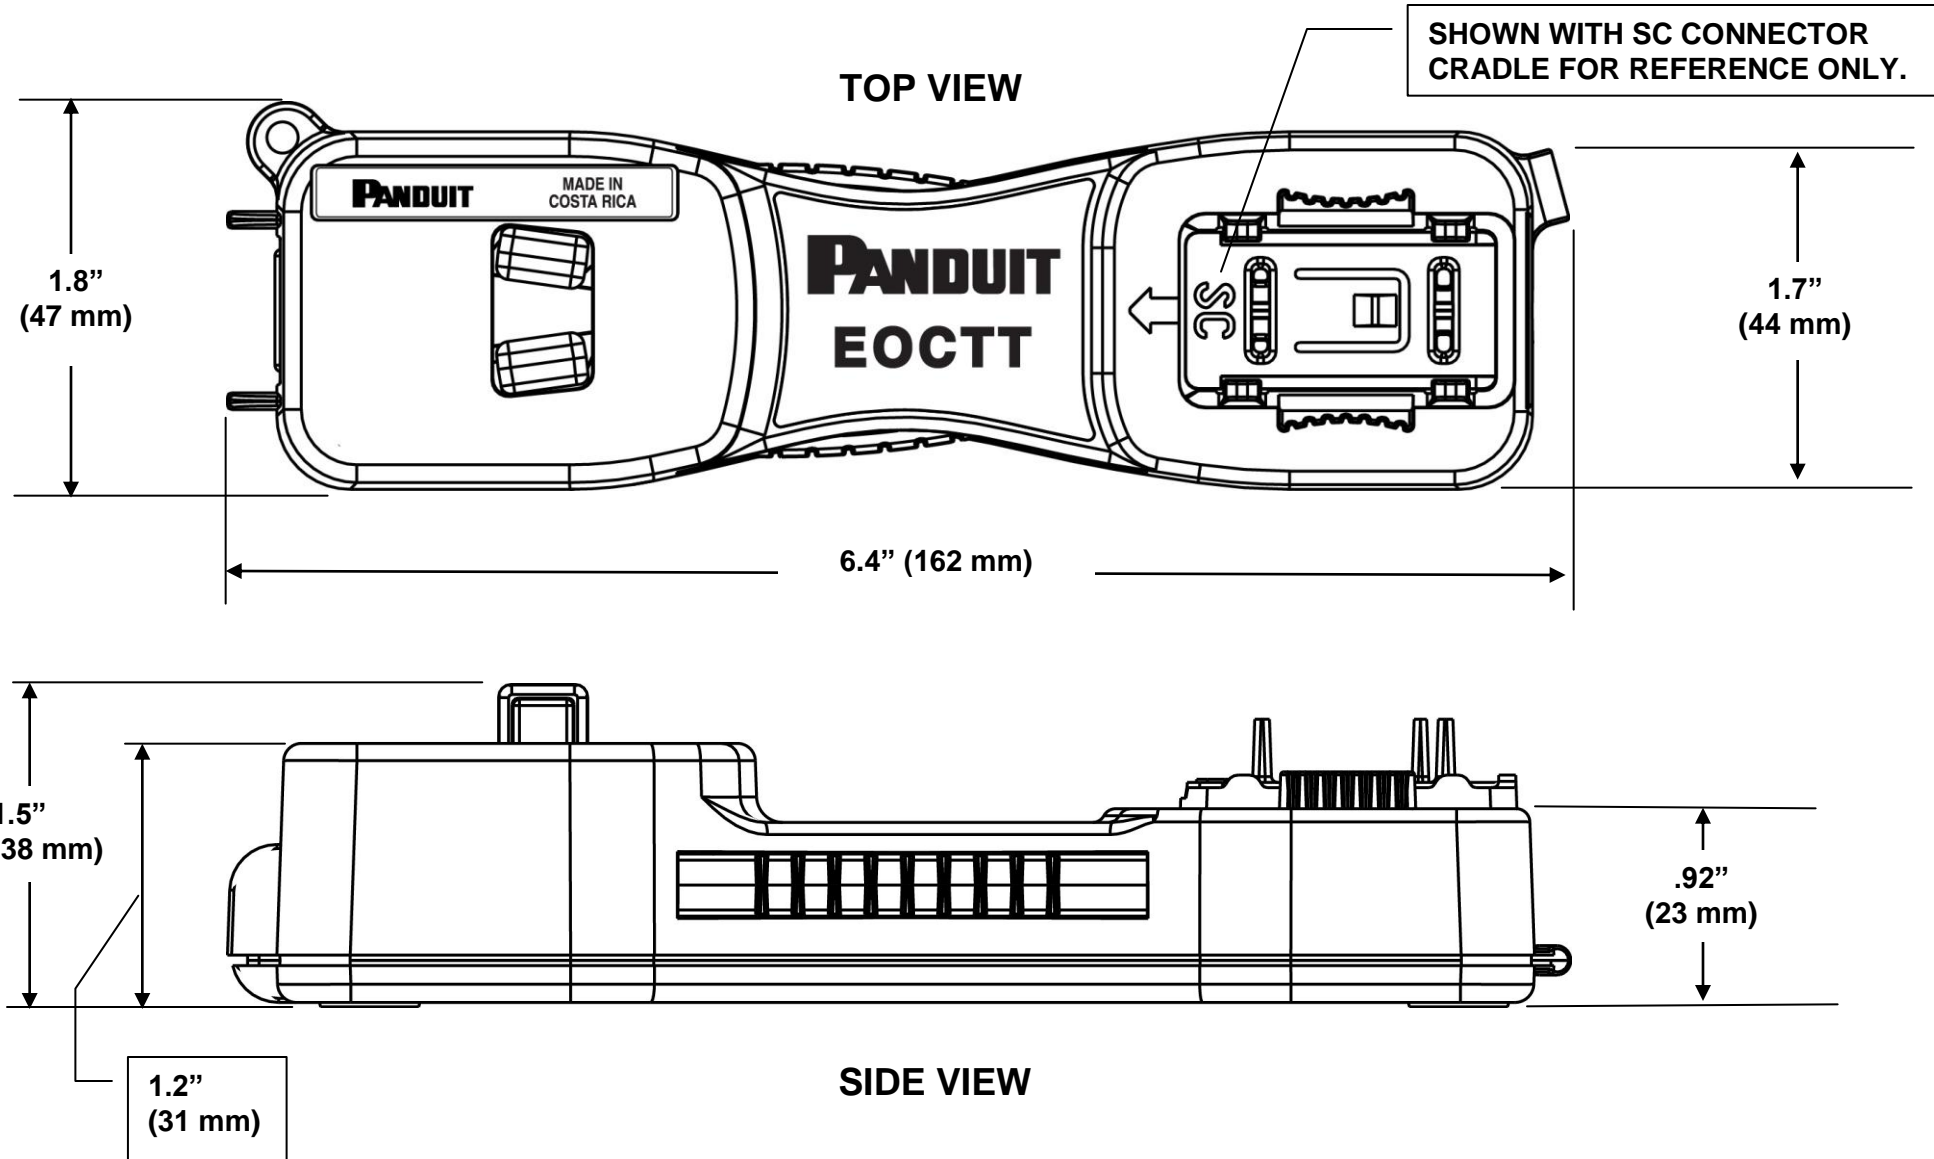

NOTES, UNLESS OTHERWISE SPECIFIED:

EOCTT TOOL USE:

This tool is intended to be used for terminating Panduit OptiCam connectors

Contact Panduit Corp. for a list of available replacement and additional parts for OptiCam connector products.

TECHNICAL SPECIFICATIONS:

Recommended use: With available patch cords only

Operating temperature: 32° F (0° C) to 104° F (40° C)

Overall Dimensions: 1.5" H x 1.8" W x 6.4" L
(38mm H x 47mm W x 162mm L)
All dimensions are for reference only.

Weight: 3.3 oz (93 g)

F:/rvusers/engdocs/custdwg/FG26826B01_01 EOCTT CD.doc

										PANDUIT CORP. TINLEY PARK, ILLINOIS			
										EOCTT*OptiCam Termination Tool			
										Customer Drawing			
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
										(.x) ± --- (.xxx) ± ---			
										(.xx) ± --- ANGLES ± ---			
01	11-14-11	BLR	MABH	UPD TOOL GRAPHIC	4413	--	ABJ			DRAWN BY:	MATL:	SCALE	
										BLR	-----	NONE	
00	8-15-11	BLR	MABH	RELEASED	4413	--	ABJ			DATE:		DRAWING NO.	
										8-15-11		FG26826B01	
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP		CHK'D:		DWG SIZE	
										MABH		B	