


Material: UL94 V-2 Nylon 6/6	
Color: Natural	
Part No.	A
	mm in
CBRLDS305A	3.5 .138
CBRLDS310A	4.8 .189
CBRLDS315A	6.4 .252
CBRLDS320A	7 .276
CBRLDS325A	8 .315
CBRLDS330A	10 .394
CBRLDS335A	11 .433
CBRLDS340A	12.7 .500
CBRLDS345A	15.9 .626

TO SNAP LOCK IN A 3 (.118) Ø HOLE, IN A
1.6 (.062) PANEL THICKNESS

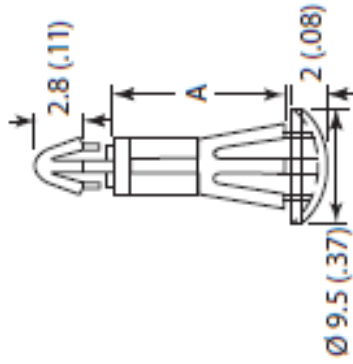

TO SNAP LOCK IN A 5.5 (.216) Ø HOLE, IN A
0.8 - 1.6 (.031 - .062) PANEL THICKNESS

TOLERANCES
UNLESS NOTED
≤ 5 mm ±0.2
5 - 20 mm ±0.3
20 - 40 mm ±0.4
40 - 60 mm ±0.5
60 - 100 mm ±0.8
≥ 100 mm ±1.0

TITLE: DUAL LOCKING CIRCUIT BOARD SUPPORT	DWG IN MM (IN)	PRINT TYPE CA
FILE# CBRLLDS3XX	PART #	SEE TABLE
SHEET: 1 OF 1	DT: 01/08/15	
RE:		