



STRIP MATERIAL NUMBER	FINISH
84524-0004	OVERALL NICKEL 80μ" MINIMUM
84524-0014	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM ALL OVER

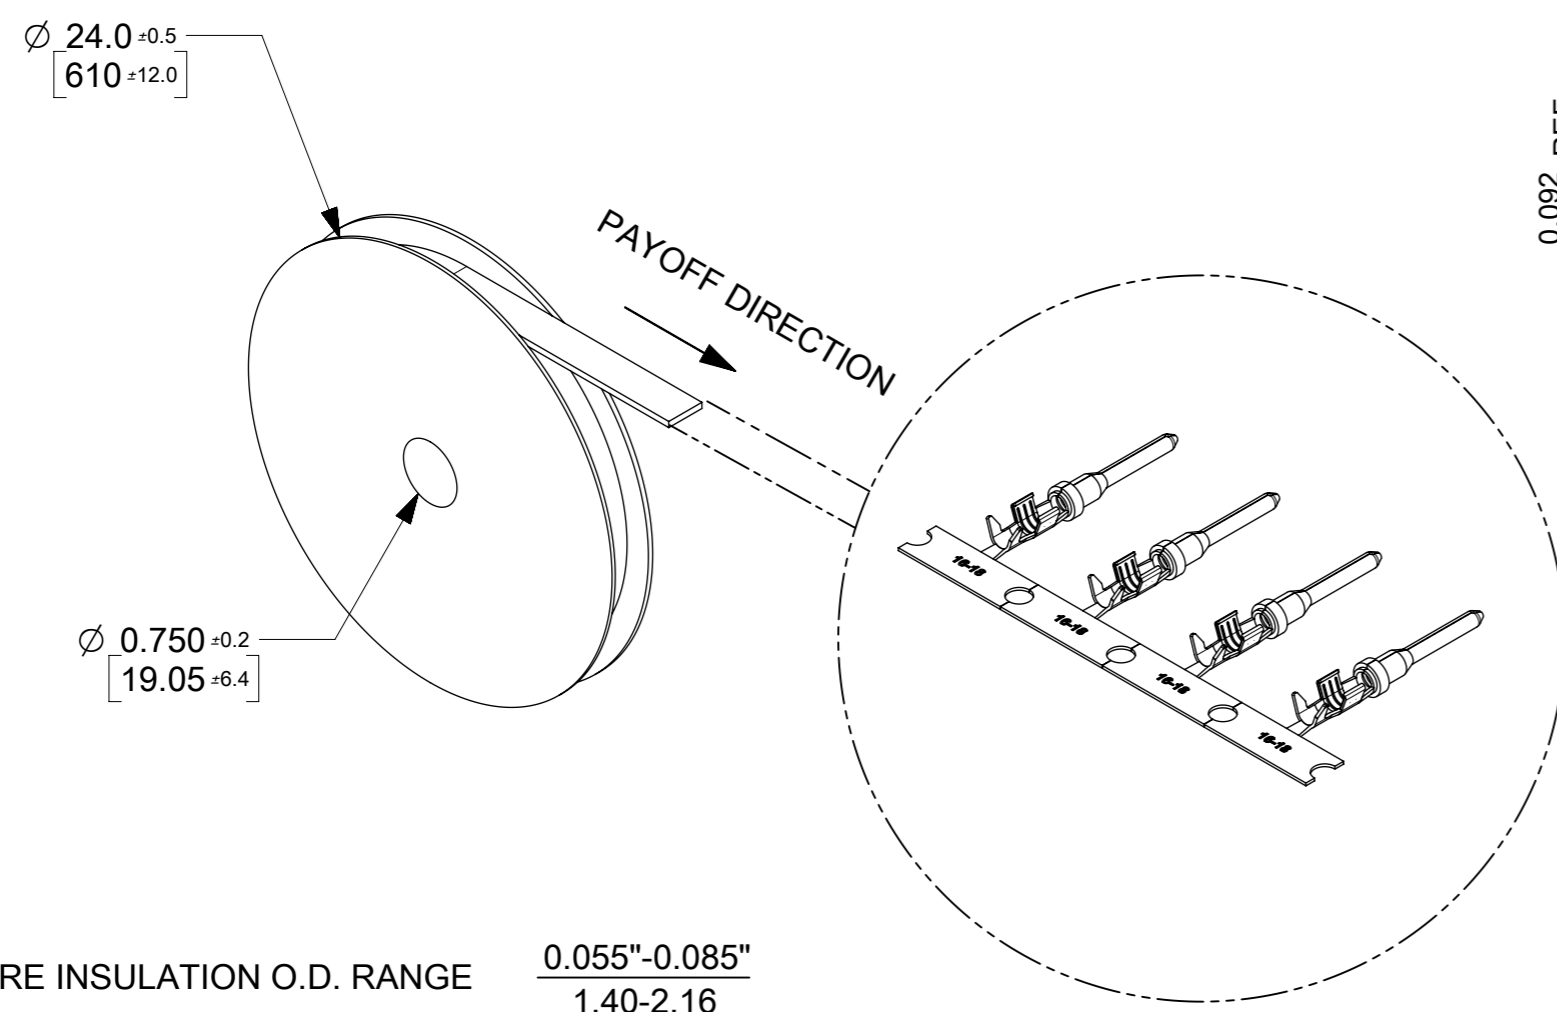

WIRE INSULATION O.D. RANGE $\frac{0.055"-0.085"}{1.40-2.16}$

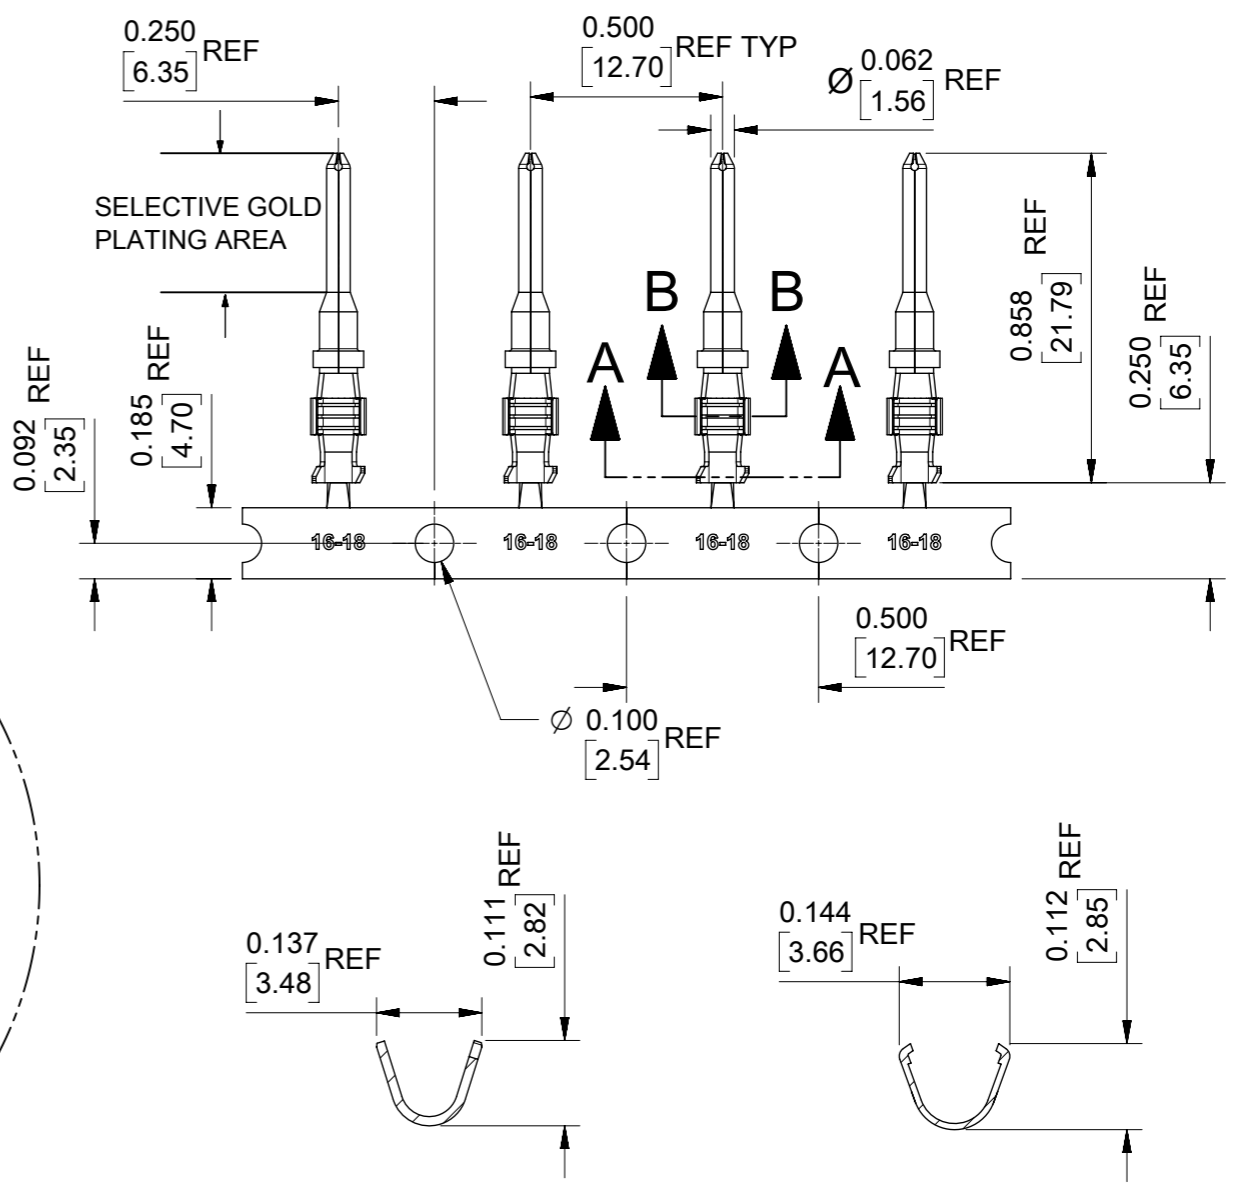

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
 2. FINISH: SEE CHART.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
 5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.
 6. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
QUALITY SYMBOLS	REDRAWN EC NO: 102697 DRWN: JFLETCHER CHK'D: NDOWDS APPR: JDWALLACE	GENERAL TOLERANCES (UNLESS SPECIFIED) MM		DIMENSION UNITS	SCALE								
		ANGULAR TOL ± 2.0 °		IN/MM	2:1								
▽A = 0	EC NO: 102697 DRWN: JFLETCHER CHK'D: NDOWDS APPR: JDWALLACE	4 PLACES ±	DRWN BY	JFLETCHER	DATE	2016/01/25		XRC PIN TERMINAL 16-18AWG 0.055"-0.085" WIRE Ø					
▽E = 0		3 PLACES ±	CHK'D BY	NDOWDS	DATE	2016/02/15							
▽B = 0		2 PLACES ± 0.13	APPR BY	JDWALLACE	DATE	2016/02/23		PRODUCT CUSTOMER DRAWING					
▽C = 0		1 PLACE ± 0.2	DRAWING SIZE	A3	THIRD ANGLE PROJECTION					SERIES	MATERIAL NUMBER	CUSTOMER	
▽D = 0		0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				84524	SEE CHART	GENERAL MARKET				
▽F = 0							DOCUMENT NUMBER	845240010	DOC TYPE	PSD	DOC PART	000	SHEET NUMBER