
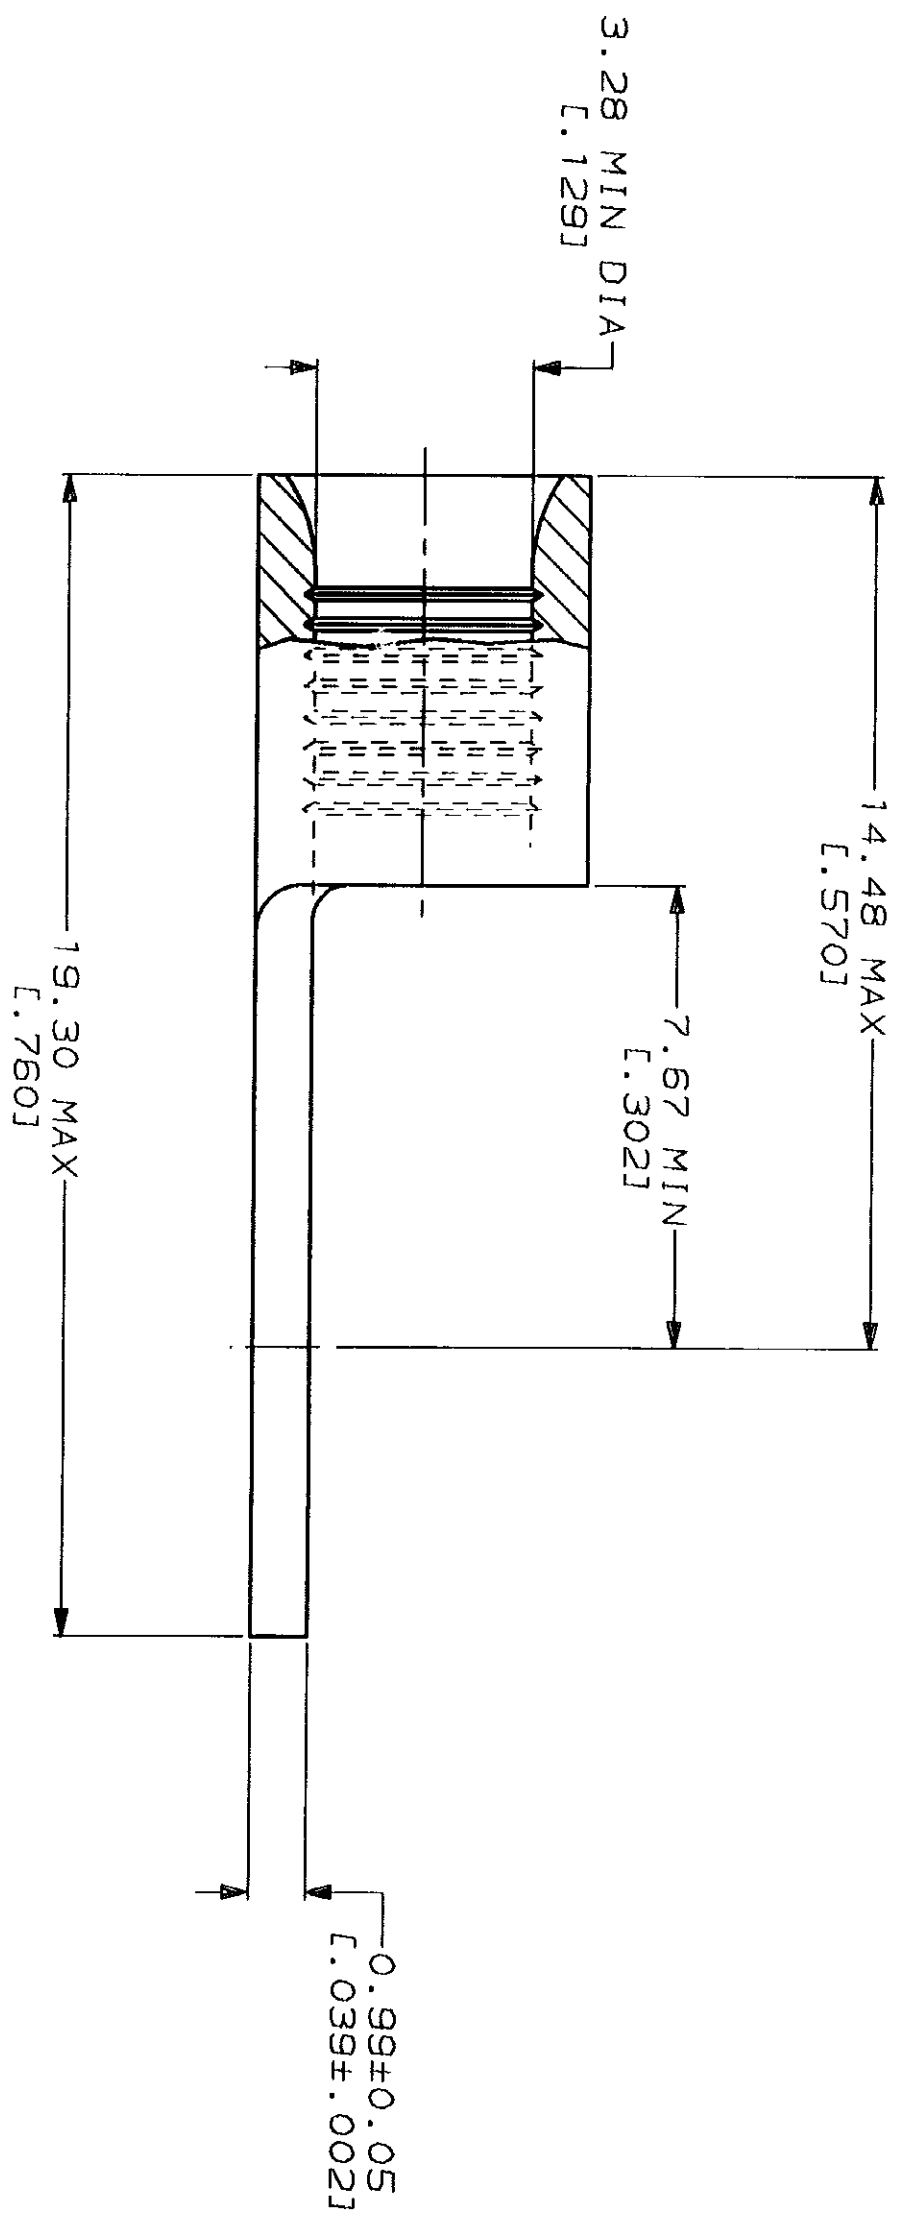


LOC	QTY	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14	F			REVISED & REDRAWN PER 0720-0040-93	4-8-93	1 st DAP
					REACTIVATED 324209 PER 0720-6018-92		

METRIC
DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	IL E13288 Listed
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE

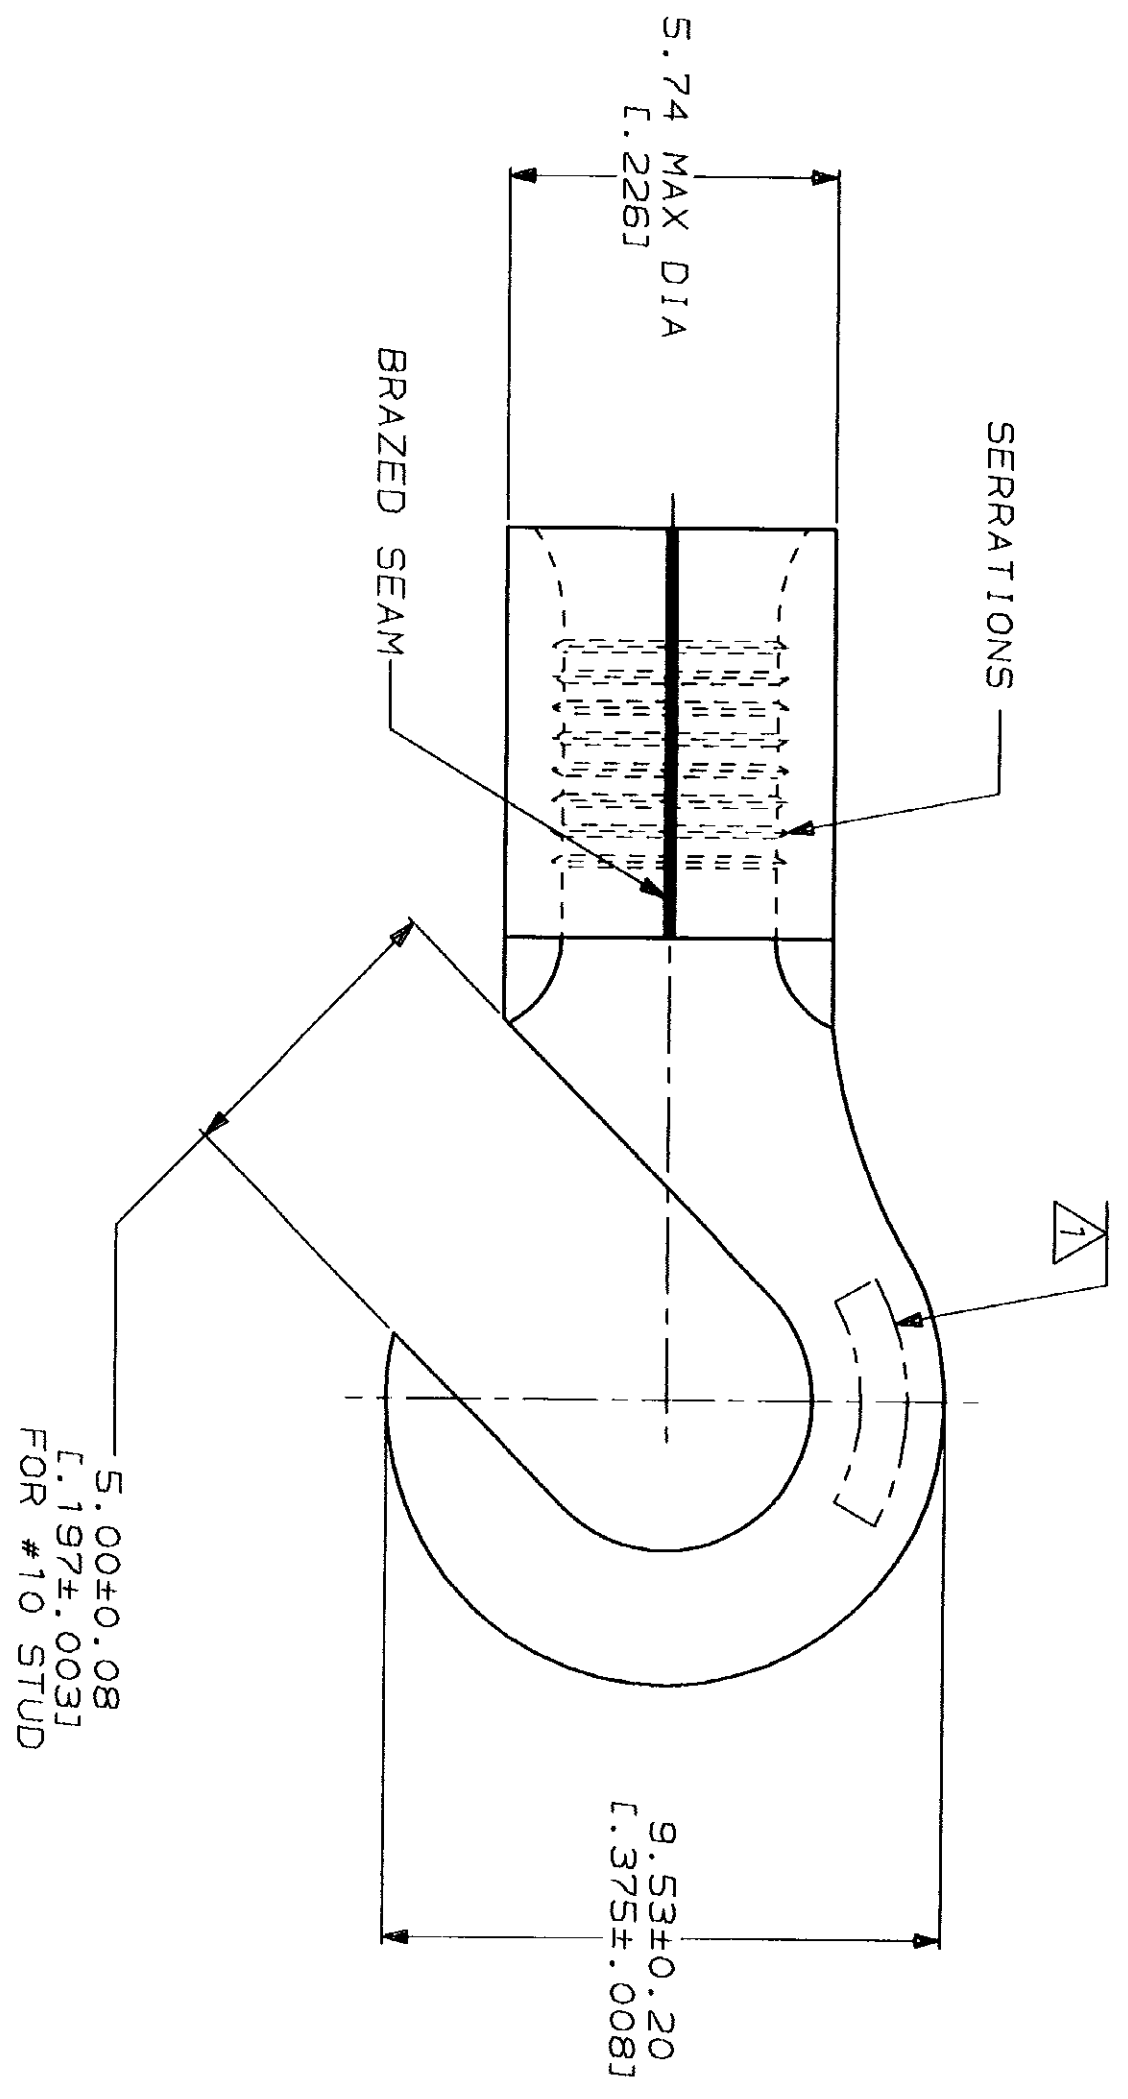

**AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE: 170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
2.62-6.64mm² (5,180-13,100) CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm FINISHES—
TOLERANCES ON:
2 PLC DEC # —
3 PLC DEC # —
ANGLES —
MATERIAL
COPPER PER
ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.00254 [1.000100] MIN
THK PER MIL-T-10727

DR 4-8-93 TA BRINKMAN
CHK 4-8-93 DA PATTERSON
APPD 4-8-93 DE MILLER
APPD 4-8-93 JL MECKLEY
PRODUCT SPEC
APPLICATION SPEC
WEIGHT

AMP
AMP Incorporated
Harrisburg, PA 17105-3508

TERMINAL, HOOK
TONGUE, SOLISTRAND™

SIZE	CAGE CODE	DRAWING NO
SCALE	00779	324209
8:1		

QUANTITY	ON TAPE	2-324209-1
	LOOSE PIECE	324209
	PACKAGING TYPE	PART NO