


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [ 7 ]
MRS1.5LH-L4	50	1.5" [ 38 ]	2.3" [ 58 ]	10.6" (269)
MRS2LH-L4	50	2.0" [ 51 ]	2.8" [ 71 ]	12.2" (310)
MRS4LH-L4	50	4.0" [ 102 ]	4.8" [ 122 ]	18.5" (470)
MRS6LH-L4	50	6.0" [ 152 ]	6.8" [ 172 ]	24.8" (630)

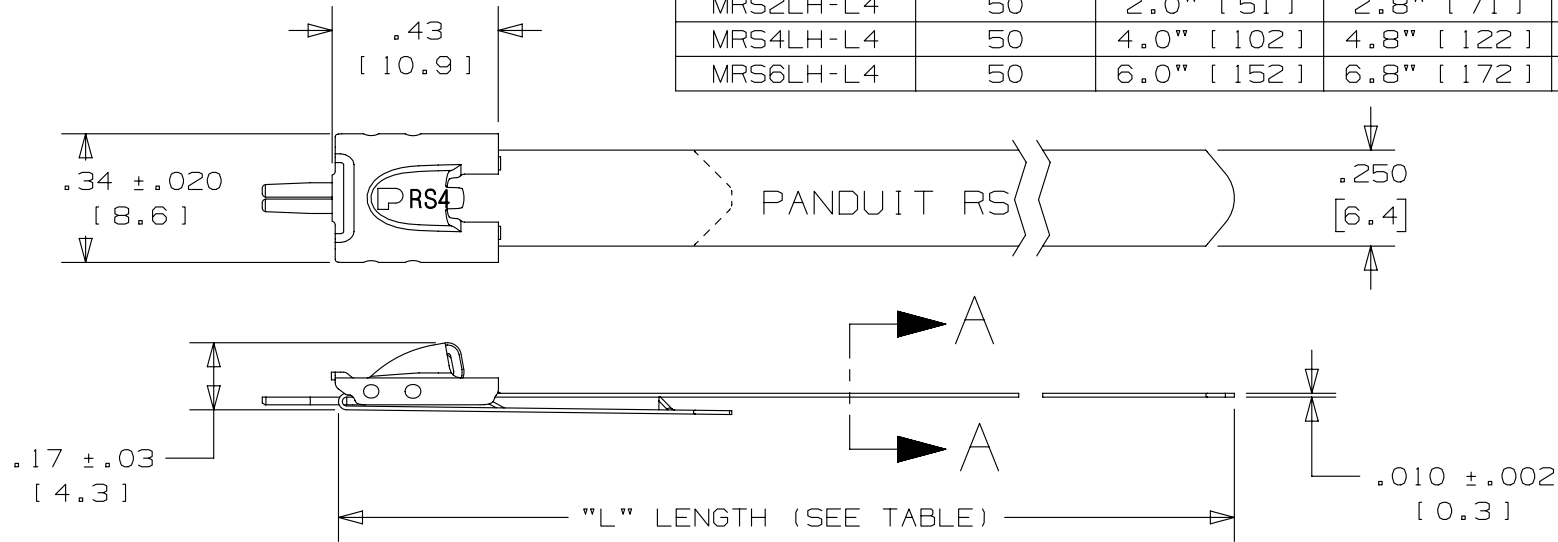

NOTES:

1. APPLICATION TOOLS - MTRTLS & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]      ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A  
SCALE 8:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07A	4/13	JAMB	MIM	---	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
06A	2/12	MIM	RGRO	---	NOTE [3]: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----
05A	8/10	JAMB	SKB	---	COLUMN ADDED TO TABLE FOR "MAX BUNDLE DIAMETER" VALUES WHEN USING APPLICATION TOOL "PTRT"	-----
04A	10/09	MIM	SKB	---	REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE	-----

TITLE					
METAL TIE - LIGHT/HEAVY SERIES RETAINED TENSION - 360° RADIAL SEAL					
CUSTOMER DRAWING					
ITEM REVISION NAME			N41261BS/07		
DATASET FILE NAME			N41261BS_DC/07A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]				MATERIAL:	
.x ± .1 [ 2.54 ]		.xxx ± .005 [ .127 ]		304 STAINLESS STEEL	
.xx ± .01 [ .25 ]		ANGLES ± 5 °		DRAWING NUMBER:	
		THIRD ANGLE PROJECTION		N41261BS_DC	
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAMB	6/05	EJD	2:1		A