

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

REVISIONS



© COPYRIGHT - TE Connectivity, SWINDON, UK

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	2	CPD CHANGE ECR-16-010502	14DEC2016	AFK	LS

COMMERCIALY CONFIDENTIAL
RESTRICTED CIRCULATION


DIRECTION OF FEED
INTO PRINTER

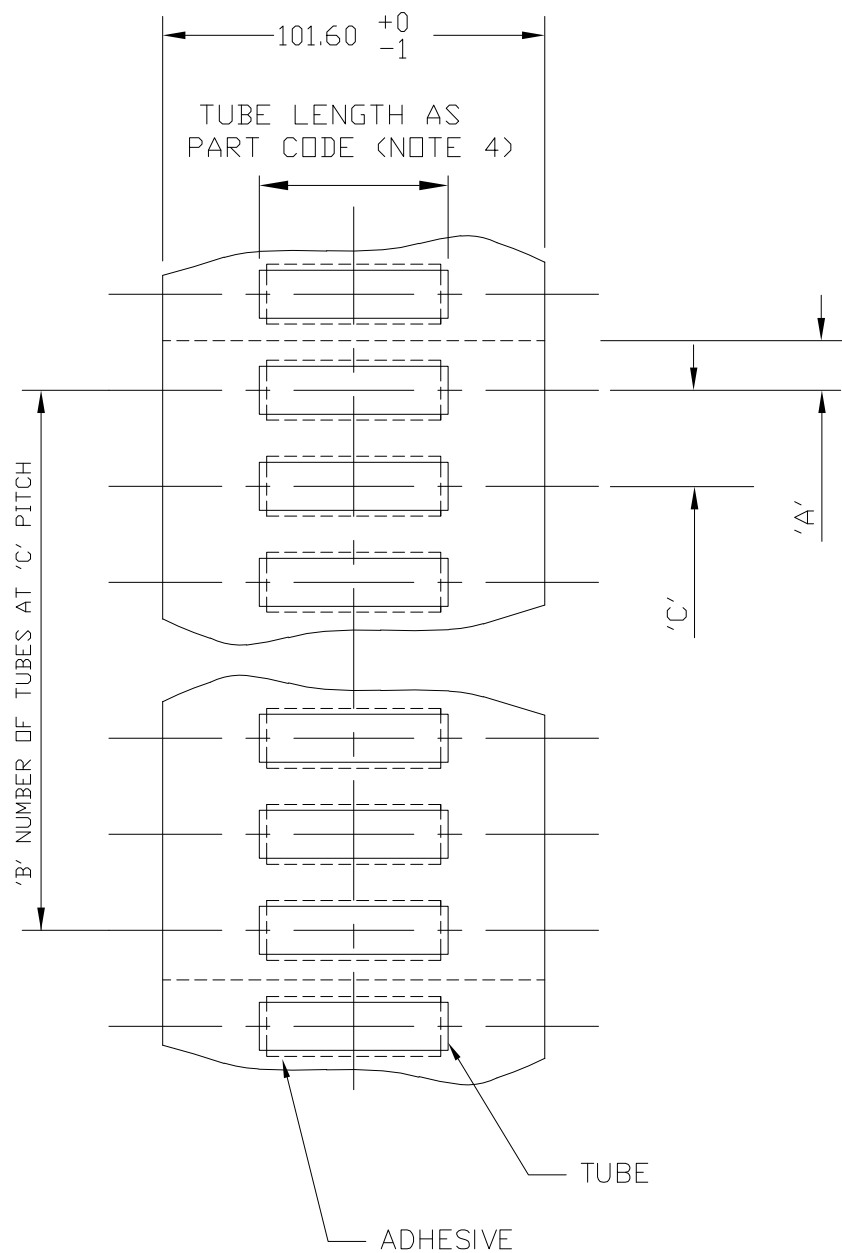

PART CODE (1st FIVE DIGITS)	'A' TOP EDGE OF PAPER TO CENTRE OF TUBE	'B' No. OF TUBES AT 'C' PITCH PER PAGE	'C' TUBE POSITION PITCH
HS024	4.23	30	8.47
HS032	6.40	20	12.7
HS048	6.40	20	12.7
HS064	8.46	15	16.93
HS095	12.7	10	25.4
HS127	12.7	10	25.4
HS190	25.4	5	50.8
HS254	25.4	5	50.8
HS381	63.5	2	127

NOTES:-

1. TOLERANCE ON 'C' - ALL SIZES ±0.5mm.
2. EDGES OF TUBE TO BE STRAIGHT/SQUARE TO PAPER EDGE WITHIN 1.0mm TOLERANCE ZONE. SEE DIAGRAM BELOW.
3. NO ACCUMULATIVE PITCH ERROR THROUGH PACK IS ACCEPTABLE.
4. TUBE LENGTH CUT TOLERANCE:- $\pm \frac{1}{0}$ mm.

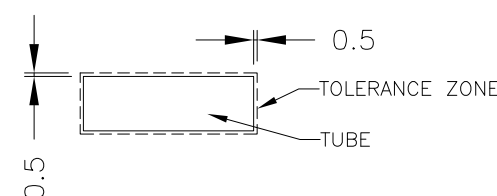

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AFK CHK	27NOV2012	TE Connectivity HSI THERMAL TRANSFER NARROW ASSEMBLY 2:1 PRE TAPED CARRIER			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD	NAME
		0 PLC	± -	PRODUCT SPEC			
		1 PLC	± 0.5	APPLICATION SPEC			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
IRRADIATED POLYOLEFIN TUBE		-		WEIGHT	A30198G	C-1905A0019	-
CUSTOMER DRAWING				SCALE	SHEET	REV	
				---	1 OF 1	2	