


Flush-type connector - SACC-E-M12MS-5CON-M12 PSCUP - 1436437

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator flush-type connector, male connector, 5-pos., M12, A-encoded, front/screw mounting with M12 thread, with solder cups, plastic version

Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 36 (PC-2011)
GTIN	 4 046356 438384
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-25 °C ... 85 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	PA 66
Sealing material	Viton
Mounting type	Front mounting M12 x 1 With flat nut

Flush-type connector - SACC-E-M12MS-5CON-M12 PSCUP - 1436437

Technical data

General characteristics

Connection method	Solder cup
Status display	No

Classifications

eclass

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001

etim

ETIM 3.0	EC002061
ETIM 4.0	EC002061

unspsc

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Approval details


Flush-type connector - SACC-E-M12MS-5CON-M12 PSCUP - 1436437

Approvals




Drawings

Dimensioned drawing




Schematic diagram



Pin assignment M12 male connector, 5-pos., A-coded, male side

Housing cutout for M12 fastening thread, mounting panel with feed-through hole

Dimensioned drawing

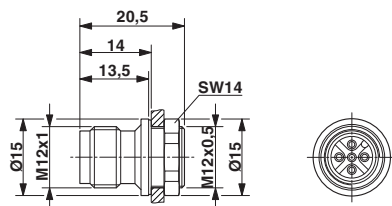

M12 flush-type connector