

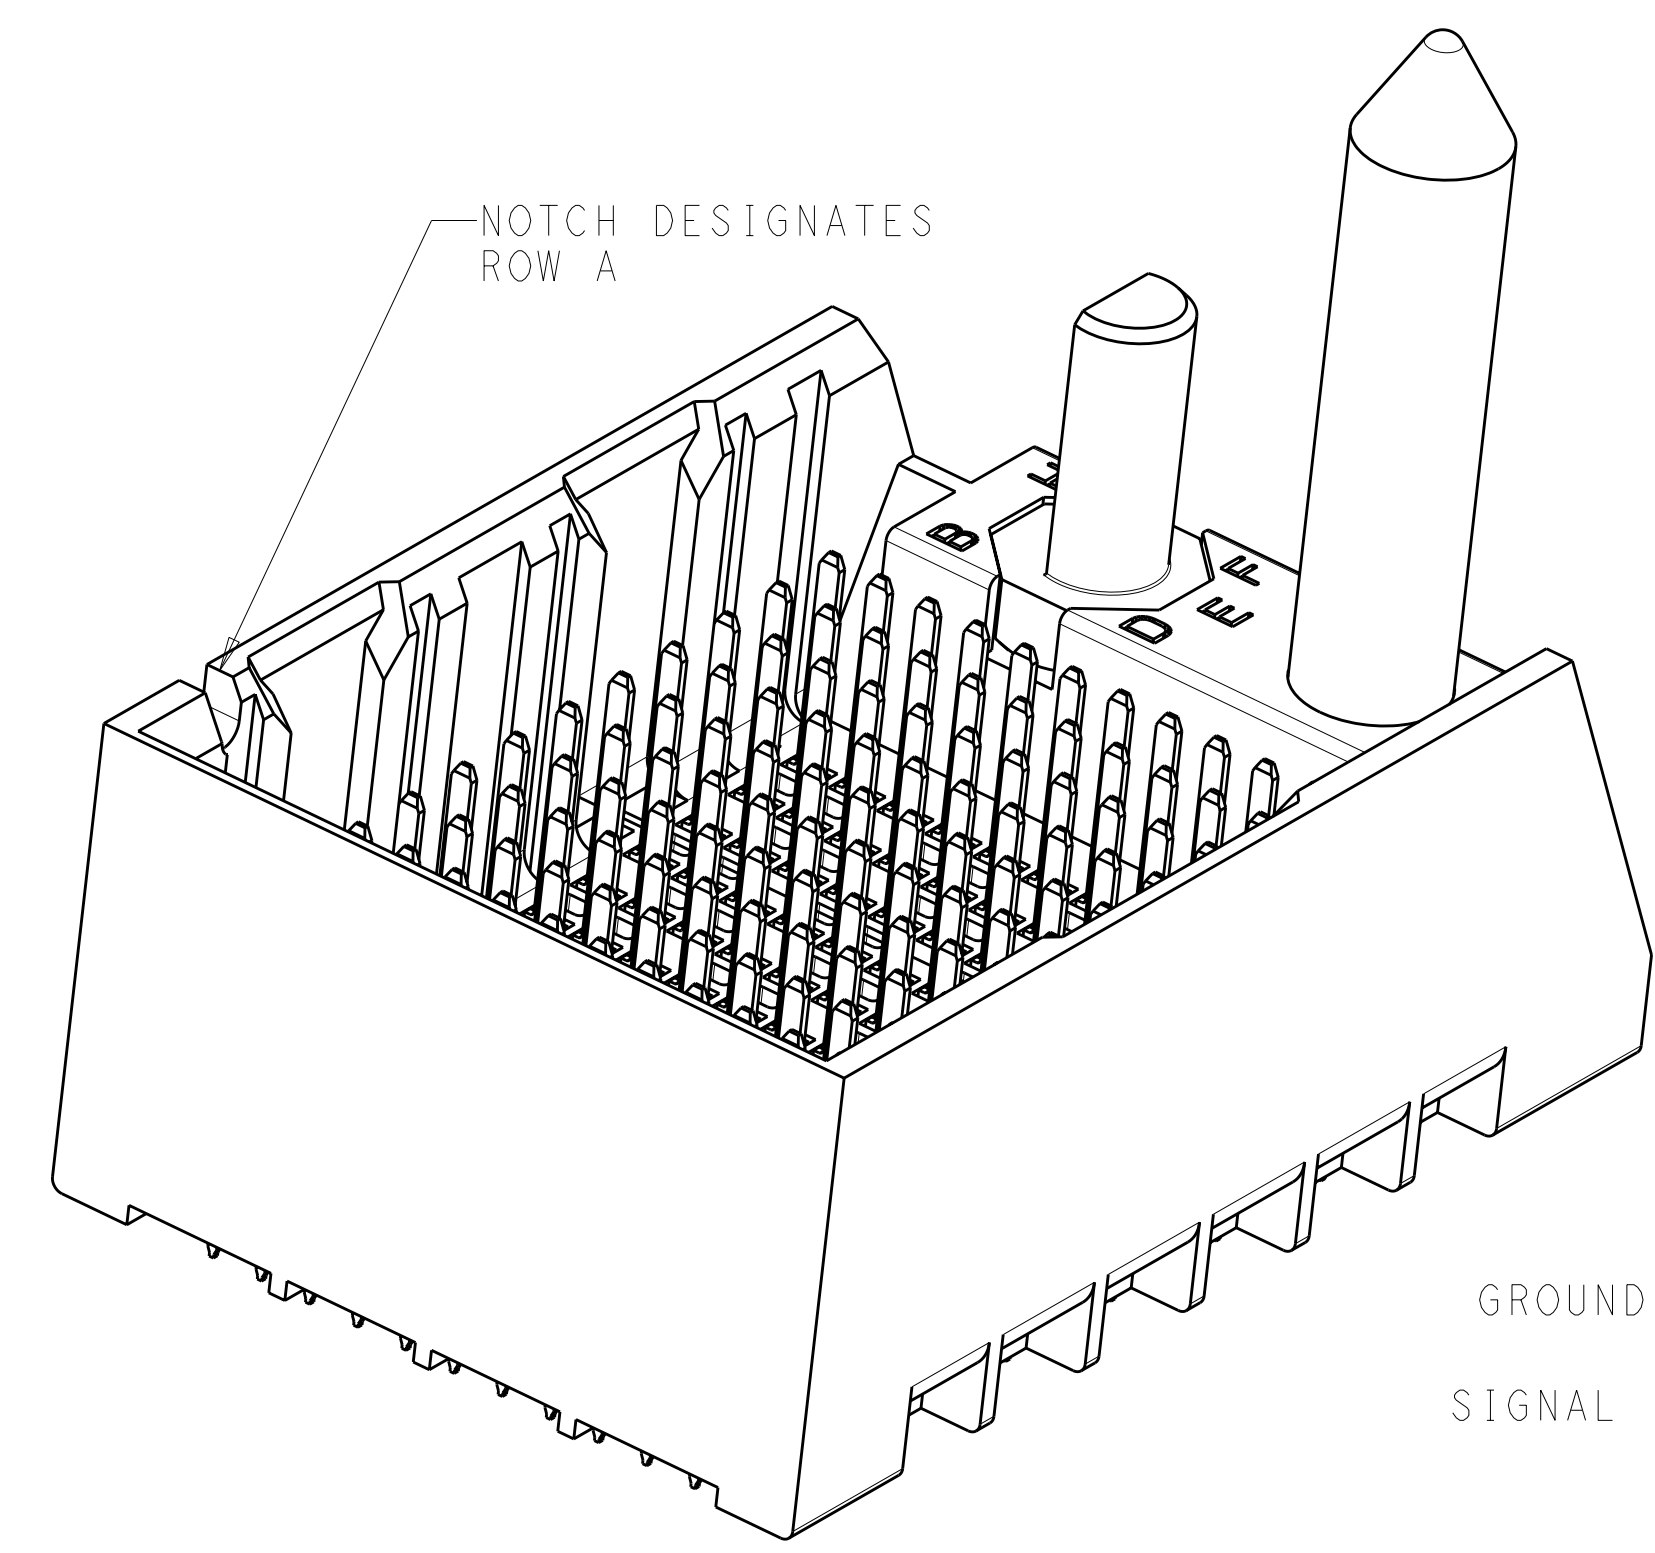




LOC	DIST	REV	DESCRIPTION	DATE	DWN	APVD
AD	00	A	CREATED BY AUTOMATION PROGRAM	20JAN2012	BC	DY

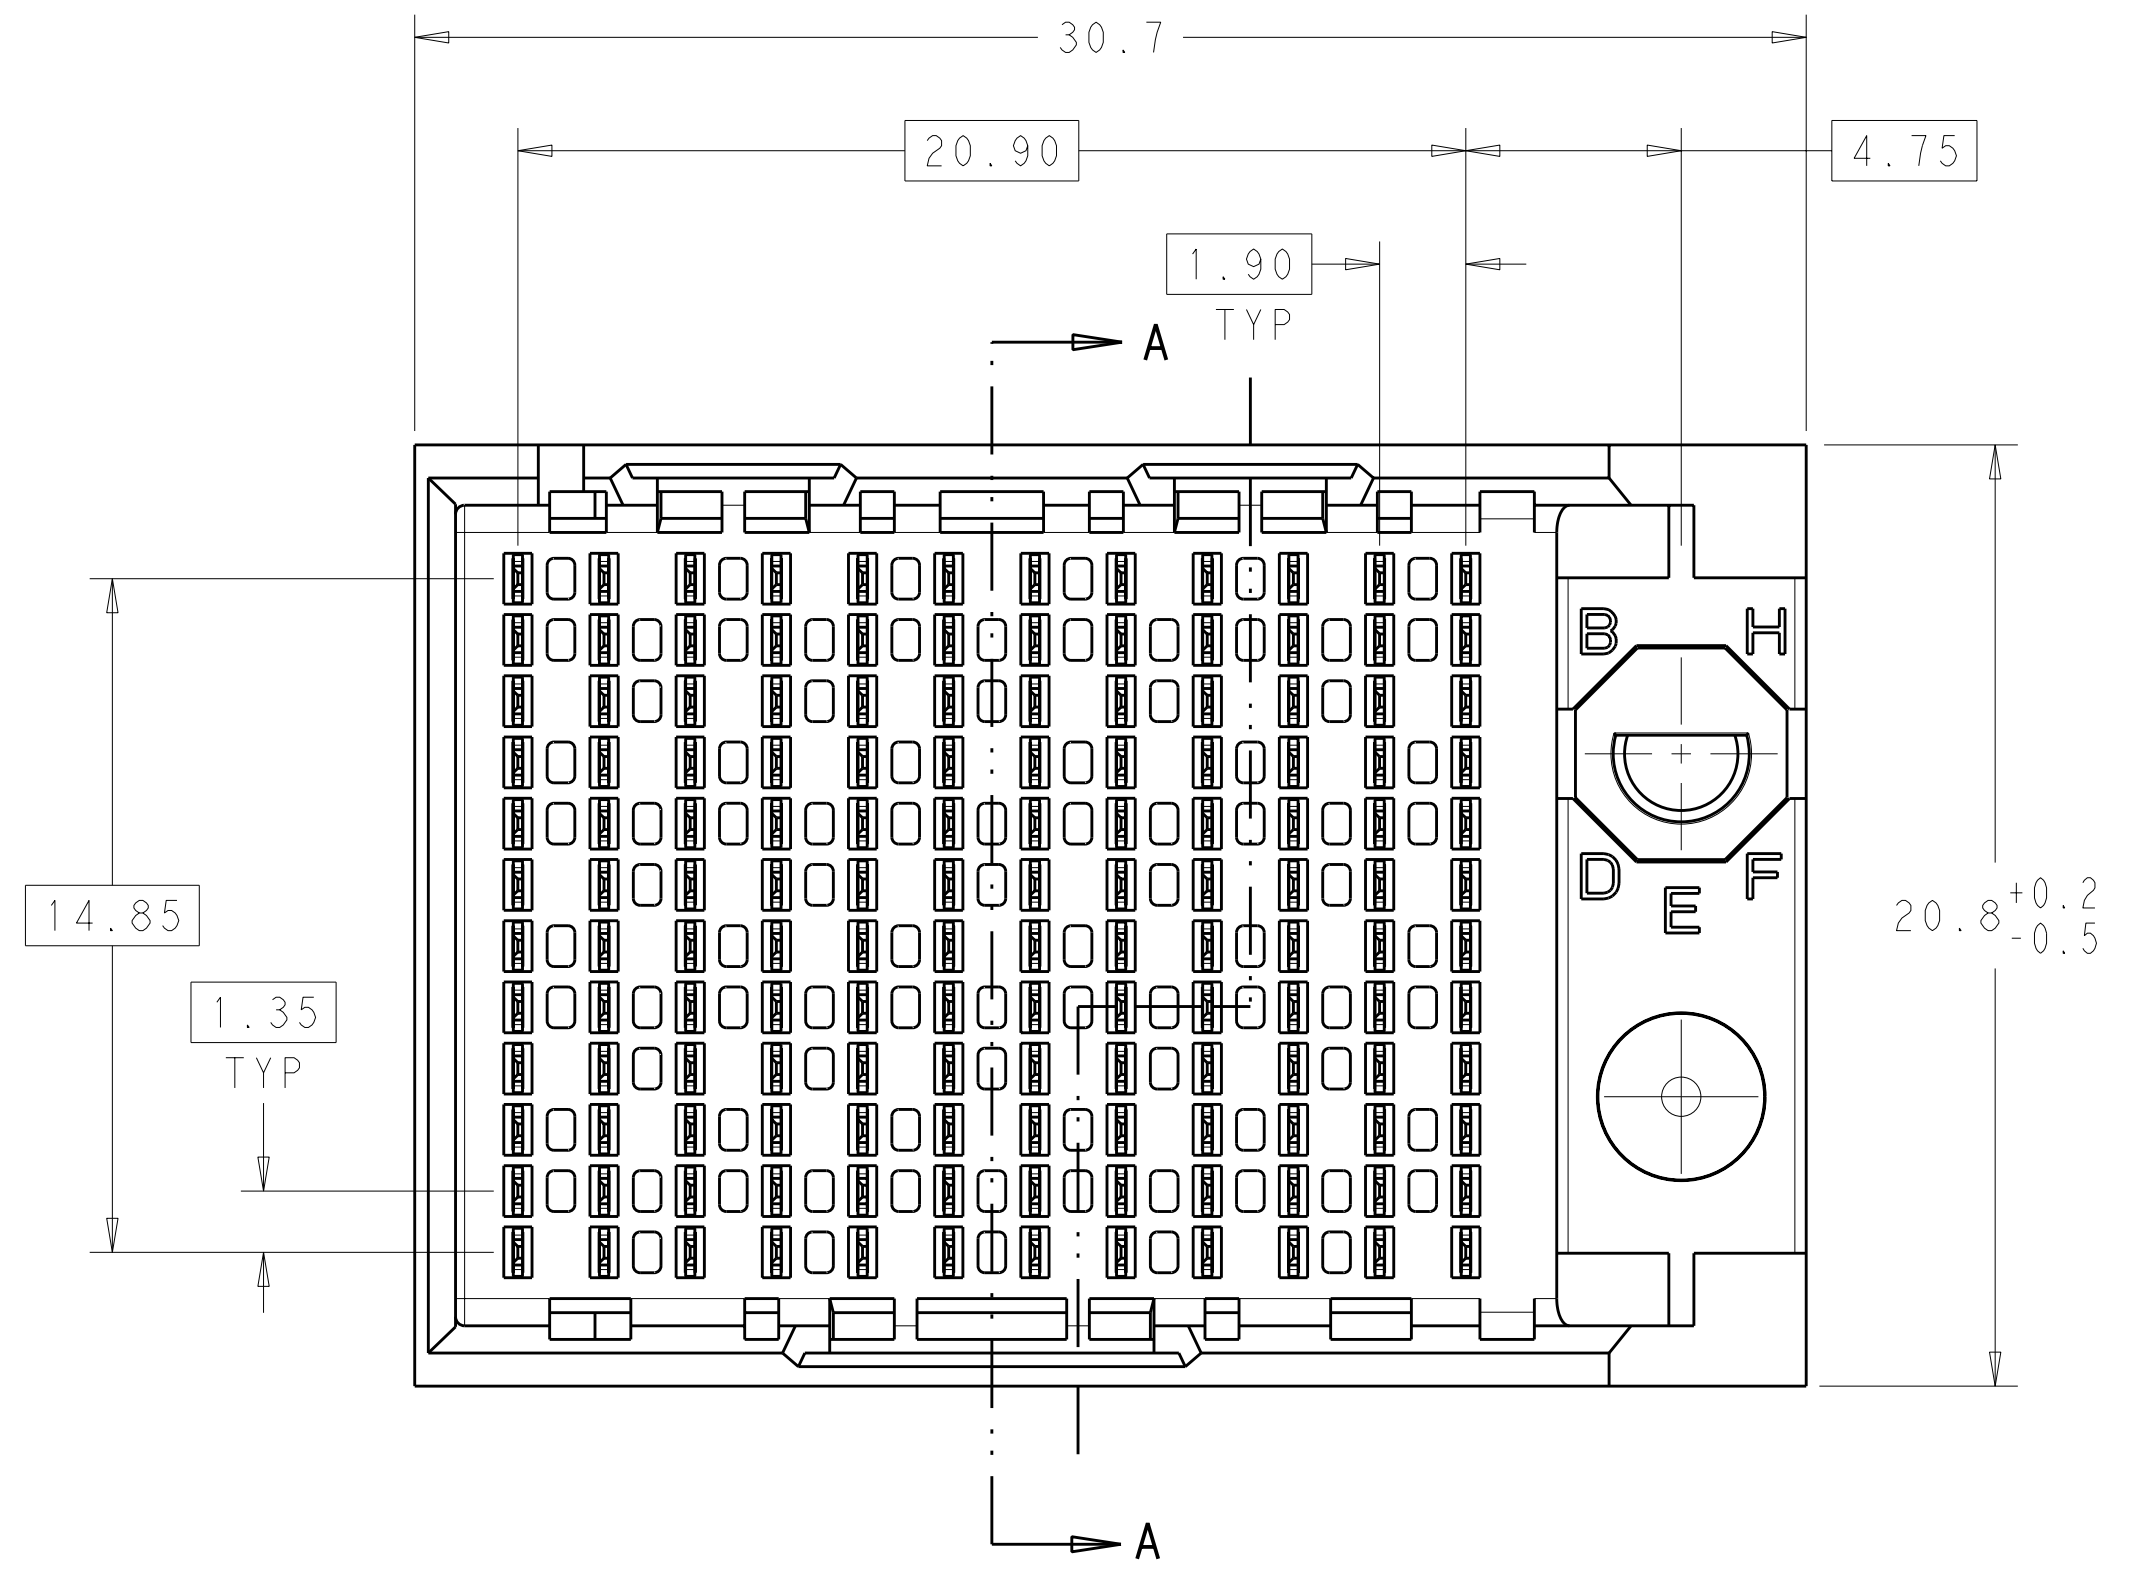

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE $\varnothing 3.56 \pm 0.08$ PTH, $\varnothing 3.66$ DRILL, AND $\varnothing 6.5$ PAD.
- 6. KEYING PIN SHOWN IN POSITION A. SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

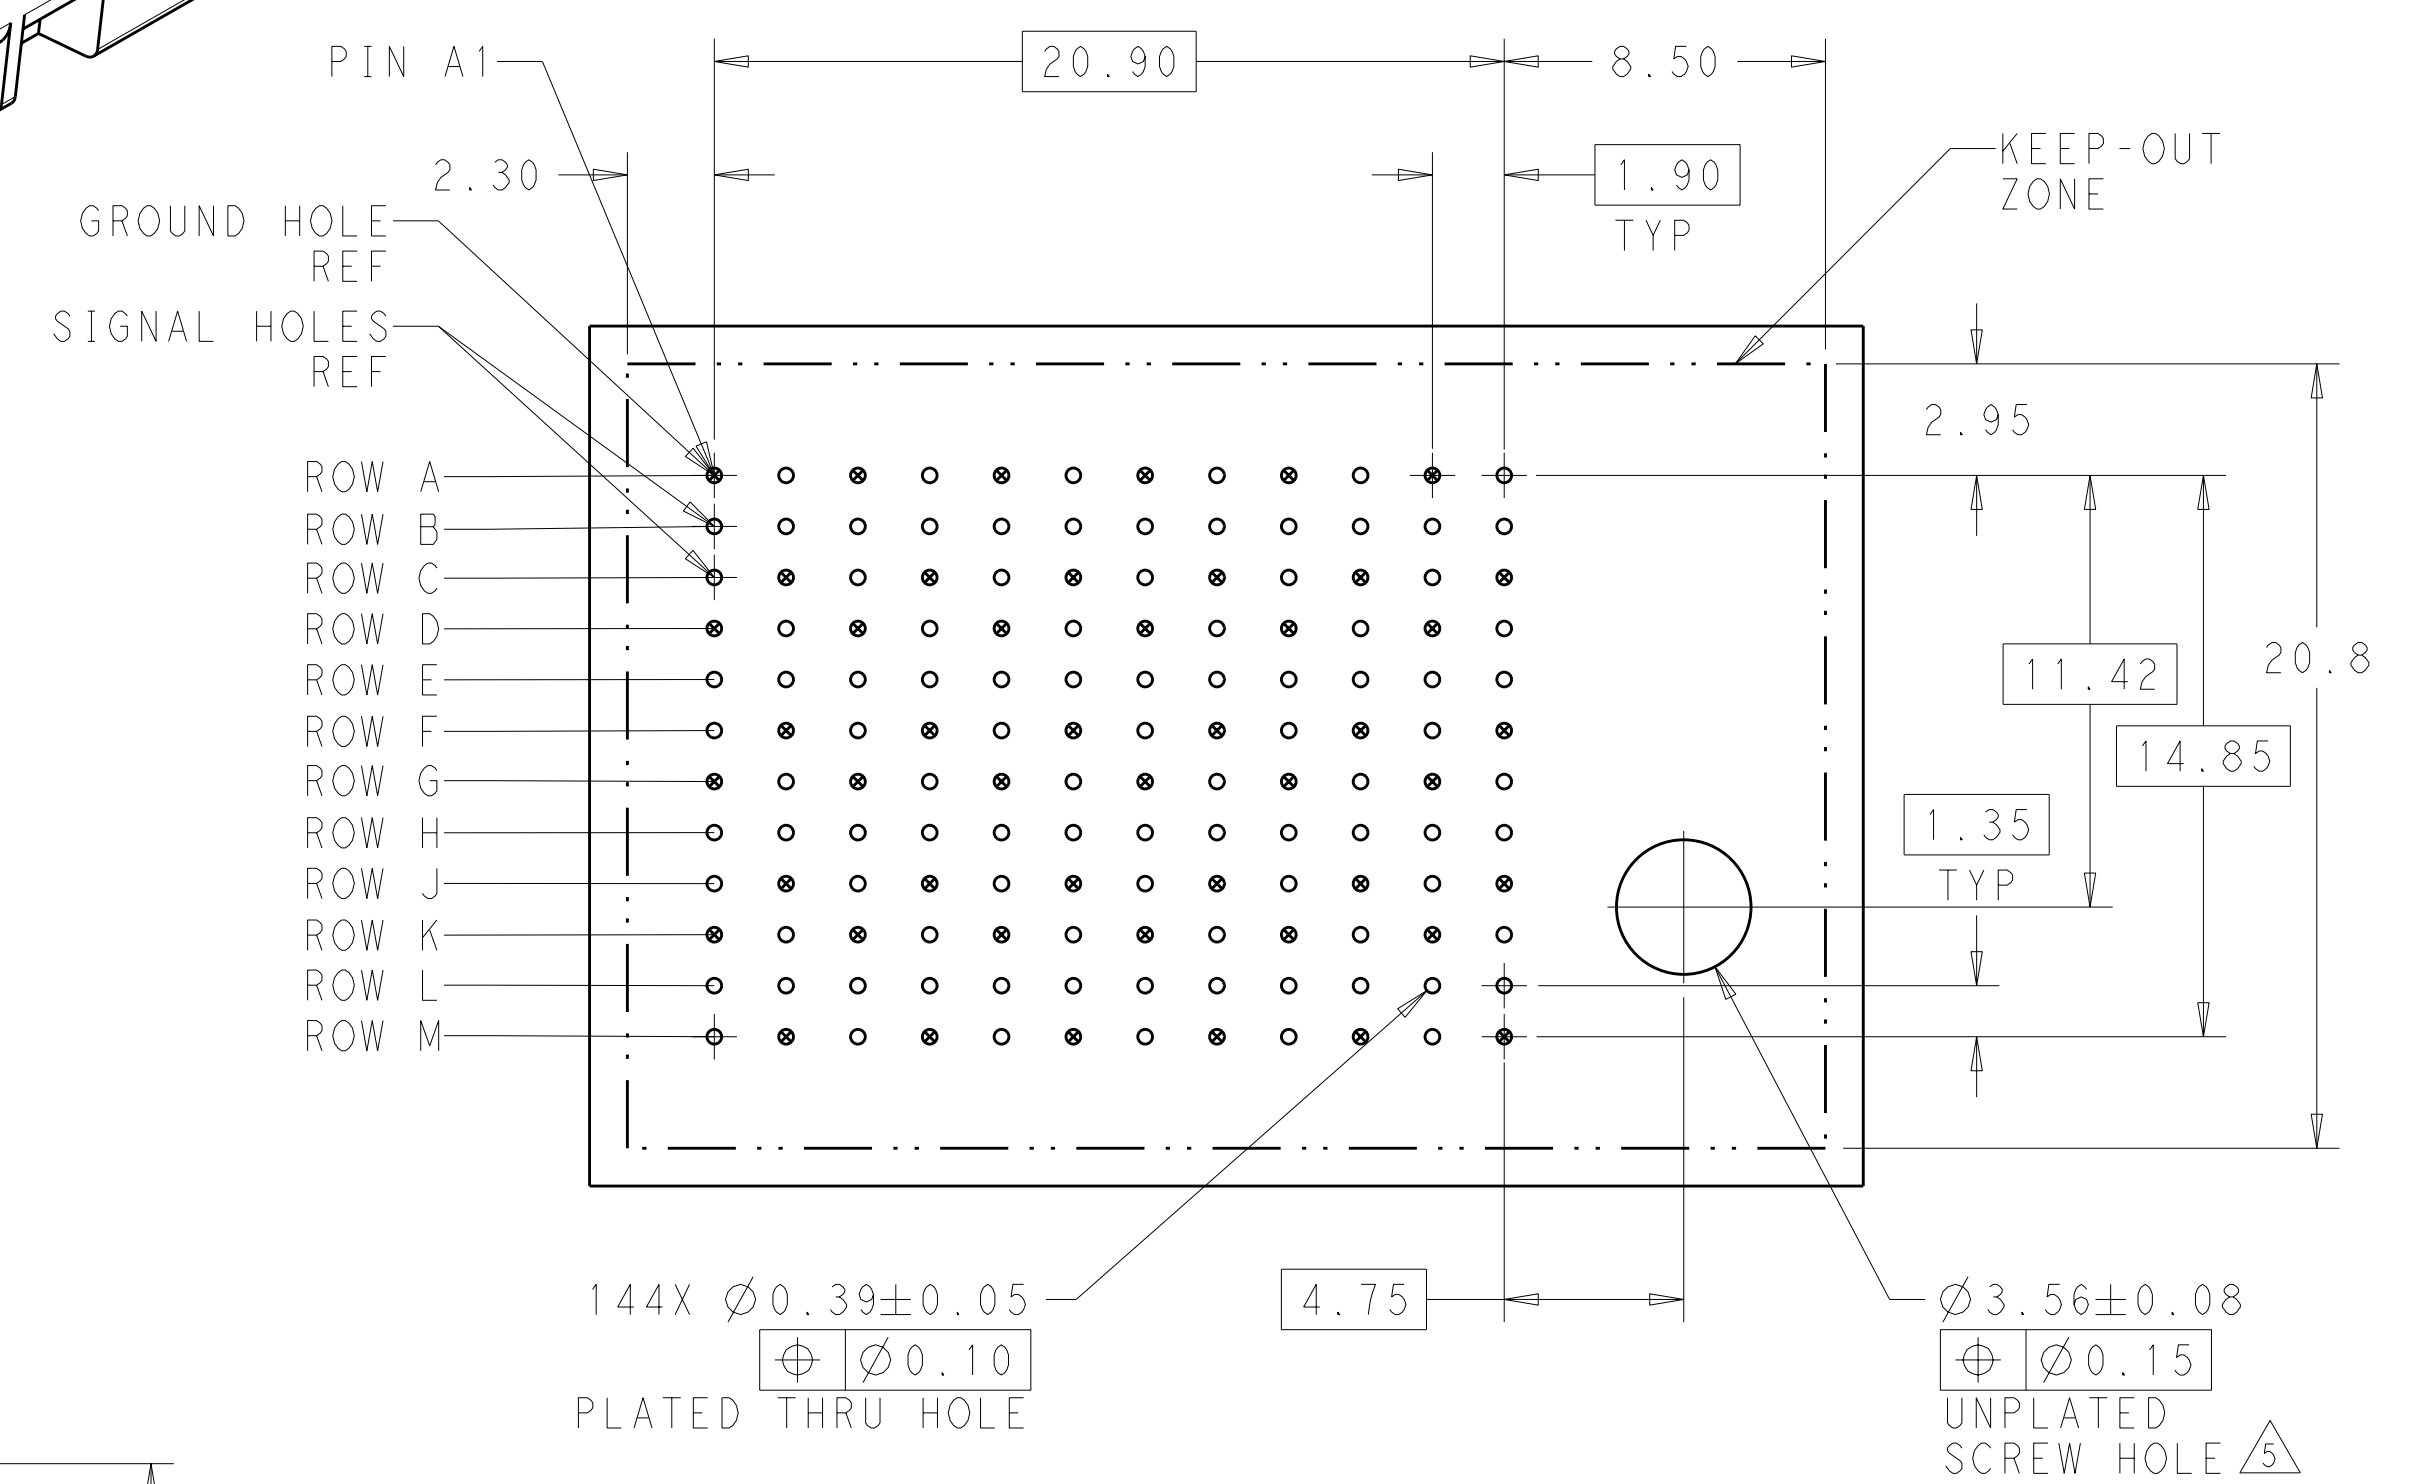

RIGHT GUIDED BACKPLANE HOLE PATTERN (CONNECTOR SIDE)

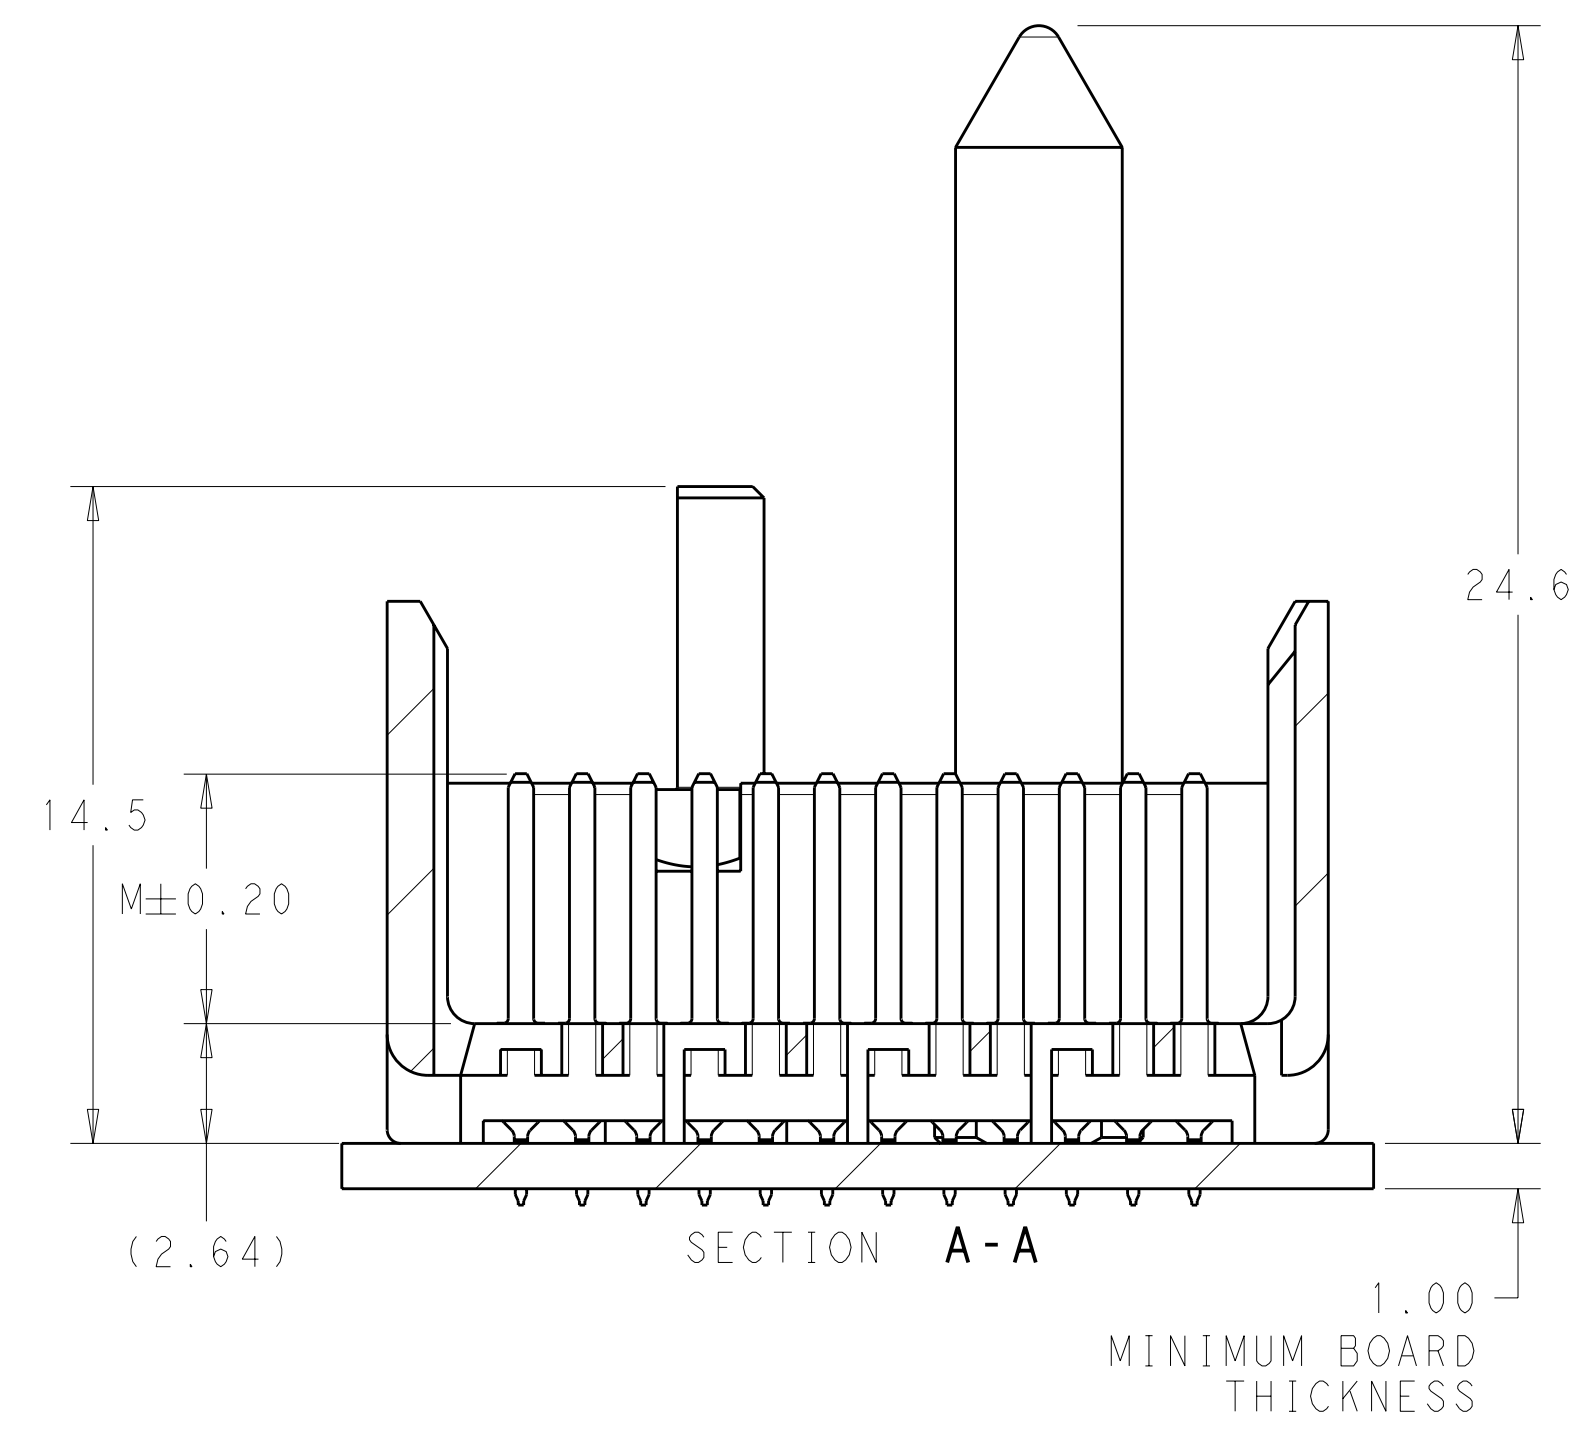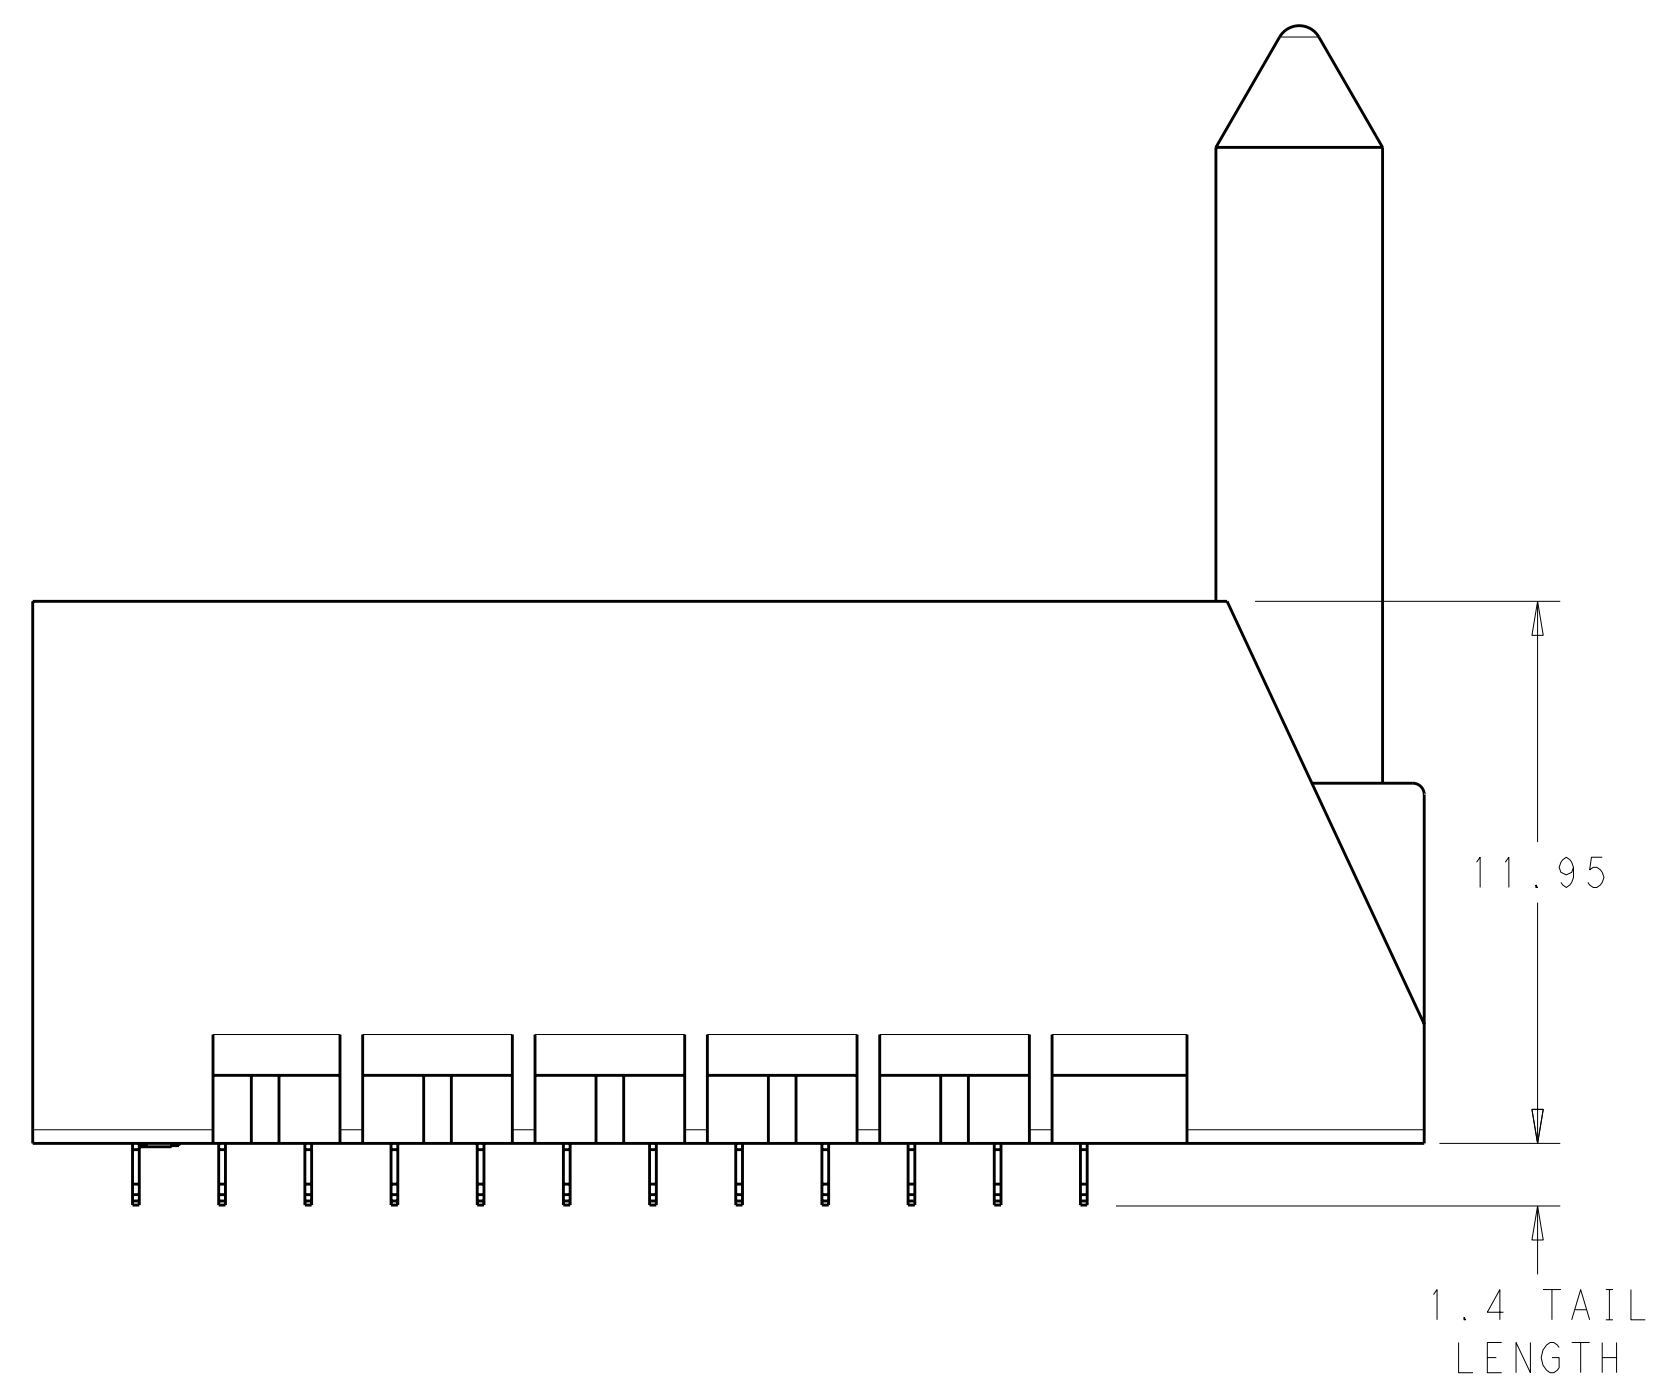


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: B. CARBO	20JAN2012	STE TE Connectivity
DIMENSIONS: mm		CHK: D.YI	20JAN2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: D.YI	20JAN2012	
9 PLC ±		NAME: IMPACT, 4 PAIR, 12 COLUMN, HEADER		
1 PLC ±0.25		PRODUCT SPEC:		RIGHT GUIDED, LEFT END WALL
3 PLC ±0.13		APPLICATION SPEC:		SIGNAL MODULE, 0.39 PTH
5 PLC ±		SIZE: CAGE CODE: DRAWING NO:	A100779C=2149997	RESTRICTED TO:
4 PLC ±		WEIGHT:		
ANGLES ±		CUSTOMER DRAWING	SCALE: 6:1	SHEET 1 OF 2
FINISH: SEE TABLE				REV A

LOC		DIST		REVISIONS			
AD	00	P	LTB	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

3	H	5.5	8-2149997-6
3	H	4.9	8-2149997-5
3	H	4.5	8-2149997-4
2	H	5.5	8-2149997-3
2	H	4.9	8-2149997-2
2	H	4.5	8-2149997-1
3	G	5.5	7-2149997-6
3	G	4.9	7-2149997-5
3	G	4.5	7-2149997-4
2	G	5.5	7-2149997-3
2	G	4.9	7-2149997-2
2	G	4.5	7-2149997-1
3	F	5.5	6-2149997-6
3	F	4.9	6-2149997-5
3	F	4.5	6-2149997-4
2	F	5.5	6-2149997-3
2	F	4.9	6-2149997-2
2	F	4.5	6-2149997-1
3	E	5.5	5-2149997-6
3	E	4.9	5-2149997-5
3	E	4.5	5-2149997-4
2	E	5.5	5-2149997-3
2	E	4.9	5-2149997-2
2	E	4.5	5-2149997-1
3	D	5.5	4-2149997-6
3	D	4.9	4-2149997-5
3	D	4.5	4-2149997-4
2	D	5.5	4-2149997-3
2	D	4.9	4-2149997-2
2	D	4.5	4-2149997-1
3	C	5.5	3-2149997-6
3	C	4.9	3-2149997-5
3	C	4.5	3-2149997-4
2	C	5.5	3-2149997-3
2	C	4.9	3-2149997-2
2	C	4.5	3-2149997-1
3	B	5.5	2-2149997-6
3	B	4.9	2-2149997-5
3	B	4.5	2-2149997-4
2	B	5.5	2-2149997-3
2	B	4.9	2-2149997-2
2	B	4.5	2-2149997-1
3	A	5.5	1-2149997-6
3	A	4.9	1-2149997-5
3	A	4.5	1-2149997-4
2	A	5.5	1-2149997-3
2	A	4.9	1-2149997-2
2	A	4.5	1-2149997-1
3	-	5.5	2149997-6
3	-	4.9	2149997-5
3	-	4.5	2149997-4
2	-	5.5	2149997-3
2	-	4.9	2149997-2
2	-	4.5	2149997-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM FOR PRODUCT AVAILABILITY

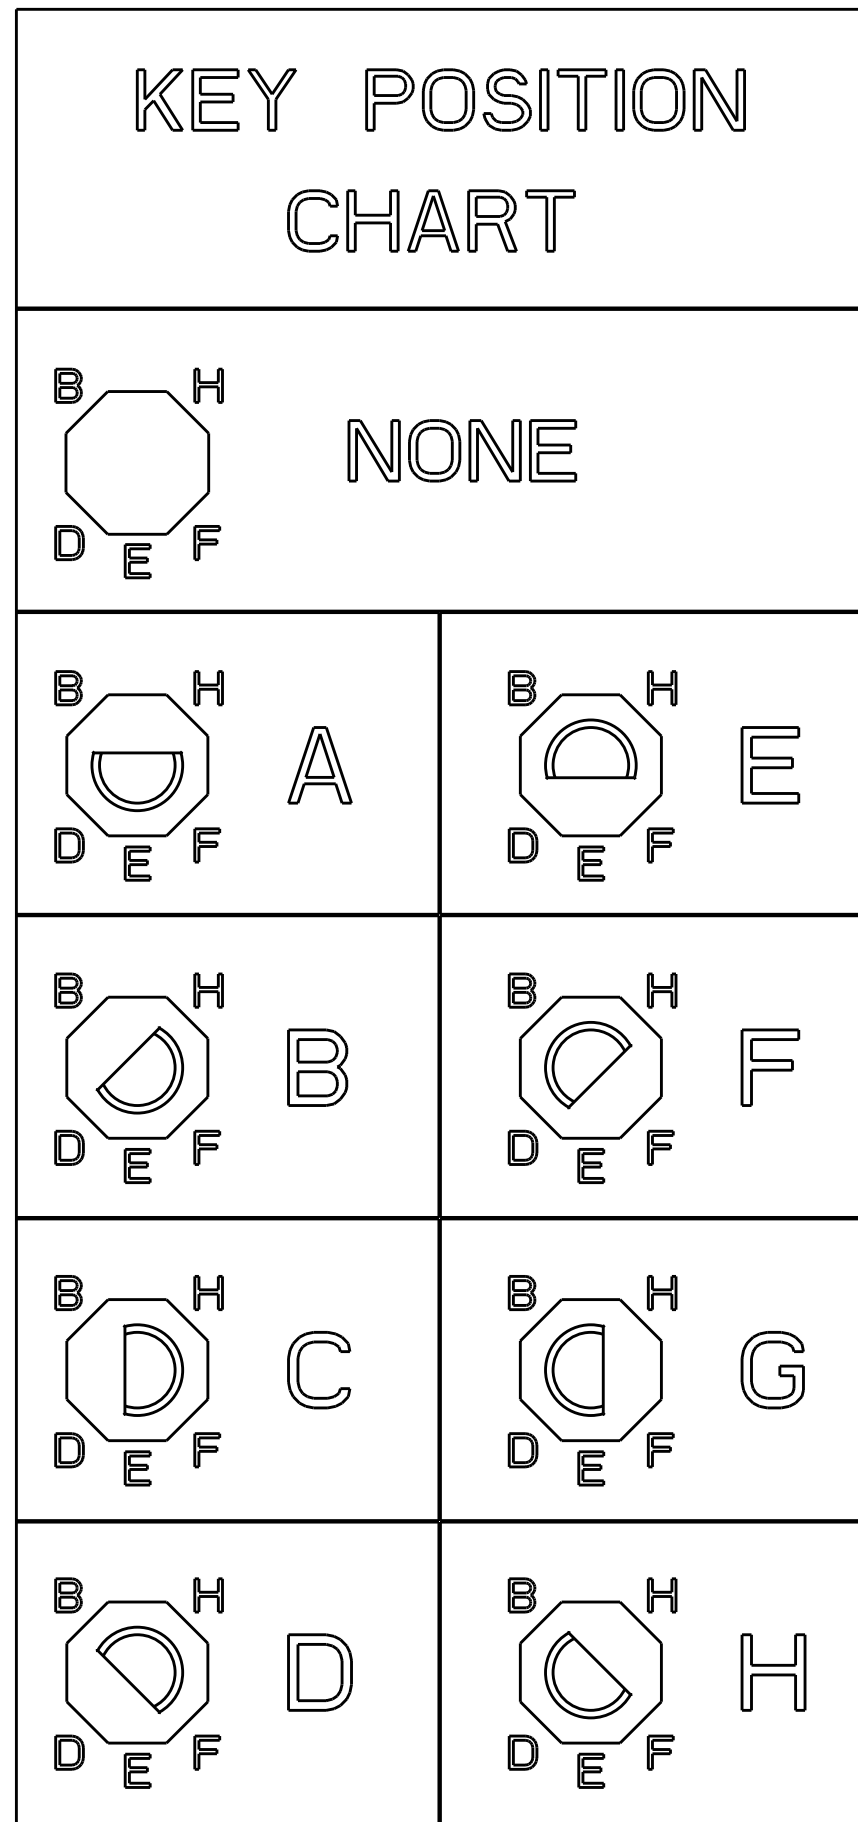

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CABBO 20JAN2012	TE TE Connectivity
DIMENSIONS: mm		CHK D. YI 20JAN2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. YI 20JAN2012	
9 PLC ± 7 PLC ±0.25 5 PLC ±0.13 4 PLC ± ANGLES ± FINISH SEE TABLE		PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	NAME IMPACT, 4 PAIR, 12 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779C=2149997 SCALE 5:1 SHEET 2 OF 2 REV A