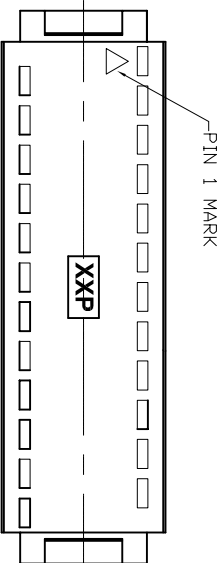
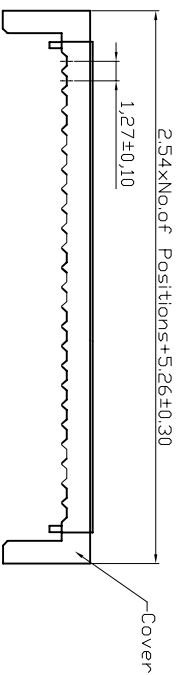

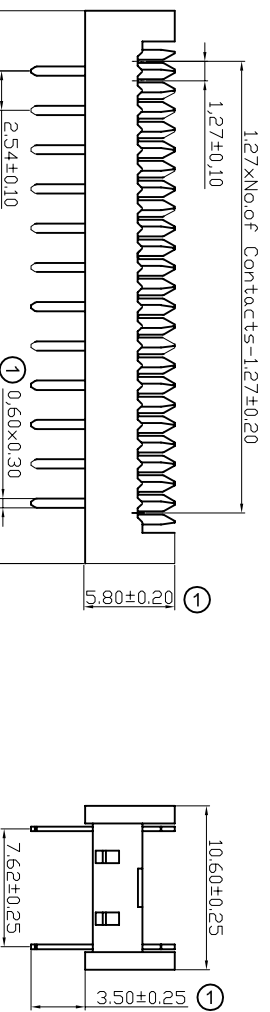

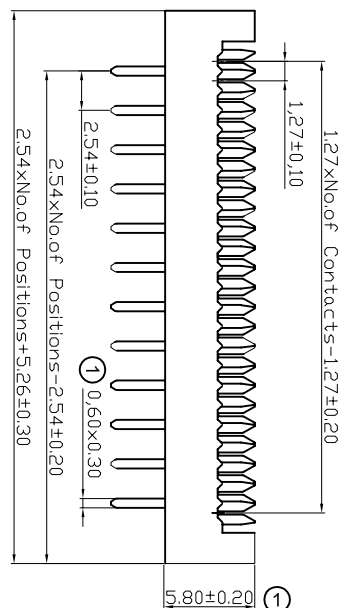



	1	2	3	4	5	6	7																
A								A															
B								B															
C								C															
D								D															
E								E															
F								F															
G	<p style="text-align: center;">RoHS Compliant</p> <p style="text-align: center;">Unit:mm</p>							G															
H	1	2	3	4	5	6	7	H															
		<table border="1"> <thead> <tr> <th>Scale</th> <th>Free</th> </tr> </thead> <tbody> <tr> <td>TOLERANCE</td> <td></td> </tr> <tr> <td>X.X</td> <td>±0.40</td> </tr> <tr> <td>X.XX</td> <td>±0.25</td> </tr> <tr> <td>X.XXX</td> <td>±0.15</td> </tr> <tr> <td>Angle</td> <td>±3°</td> </tr> </tbody> </table>		Scale	Free	TOLERANCE		X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	±3°								
Scale	Free																						
TOLERANCE																							
X.X	±0.40																						
X.XX	±0.25																						
X.XXX	±0.15																						
Angle	±3°																						
		<table border="1"> <thead> <tr> <th>Id.</th> <th>Modification</th> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>①</td> <td>Update</td> <td>30.05.2013</td> <td>Winnie</td> </tr> <tr> <td>②</td> <td>Change the P/N</td> <td>19.12.2013</td> <td>Winnie</td> </tr> <tr> <td>③</td> <td>Drawn</td> <td>28.10.2011</td> <td>Chappell</td> </tr> </tbody> </table>		Id.	Modification	Date	Name	①	Update	30.05.2013	Winnie	②	Change the P/N	19.12.2013	Winnie	③	Drawn	28.10.2011	Chappell				
Id.	Modification	Date	Name																				
①	Update	30.05.2013	Winnie																				
②	Change the P/N	19.12.2013	Winnie																				
③	Drawn	28.10.2011	Chappell																				
																							
		<table border="1"> <thead> <tr> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>28.10.2011</td> <td>Chappell</td> </tr> <tr> <td>19.12.2013</td> <td>Winnie</td> </tr> </tbody> </table>		Date	Name	28.10.2011	Chappell	19.12.2013	Winnie														
Date	Name																						
28.10.2011	Chappell																						
19.12.2013	Winnie																						
		<table border="1"> <thead> <tr> <th>Customer-No.</th> <th>Drawing-No.</th> </tr> </thead> <tbody> <tr> <td>ASSMANN WSW-No. ②ADIPxx-G-LC</td> <td>ASS 5734 CO</td> </tr> </tbody> </table>		Customer-No.	Drawing-No.	ASSMANN WSW-No. ②ADIPxx-G-LC	ASS 5734 CO																
Customer-No.	Drawing-No.																						
ASSMANN WSW-No. ②ADIPxx-G-LC	ASS 5734 CO																						
		<table border="1"> <thead> <tr> <th>Replace</th> <th>Sheet</th> </tr> </thead> <tbody> <tr> <td></td> <td>rev02</td> </tr> </tbody> </table>		Replace	Sheet		rev02																
Replace	Sheet																						
	rev02																						

NOTES:

MATERIAL

- 1. Insulator Material: PBT+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Gold Flash Over Ni

ELECTRICAL

- ① 1. Current Rating : 3.0AMP
- ① 2. Withstand Voltage : 1000V AC/DC
- ① 3. Contact Resistance : 20mΩ max
- ① 4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- ① 1. Operation Temperature: -40°C to +105°C
- ① 2. Packing : Tray