


Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- Plastic Material: UL Flammability Classification Rating 94V-0

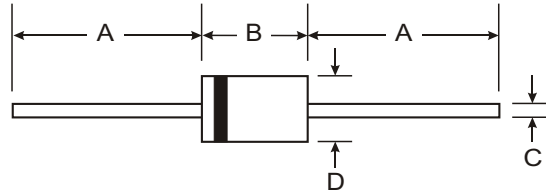

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Mechanical Data


- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.1 grams (approx)
- Mounting Position: Any
- Marking: Type Number

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	1N5820	1N5821	1N5822	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	20	30	40	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Average Rectified Output Current (Note 1) @ T _L = 95°C	I _O	3.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) @ T _L = 75°C	I _{FSM}	80			A
Forward Voltage (Note 2) @ I _F = 3.0A @ I _F = 9.4A	V _{FM}	0.475 0.850	0.500 0.900	0.525 0.950	V
Peak Reverse Current at Rated DC Blocking Voltage (Note 2) @ T _A = 25°C @ T _A = 100°C	I _{RM}	2.0 20			mA
Typical Thermal Resistance (Note 3)	R _{θJA}	40			°C/W
	R _{θJL}	10			
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +125			°C


- Notes:
1. Measured at ambient temperature at a distance of 9.5mm from the case.
 2. Short duration pulse test used to minimize self-heating effect.
 3. Thermal resistance from junction to lead vertical P.C.B. mounted, 0.500" (12.7mm) lead length with 2.5 x 2.5" (63.5 x 63.5mm) copper pad.

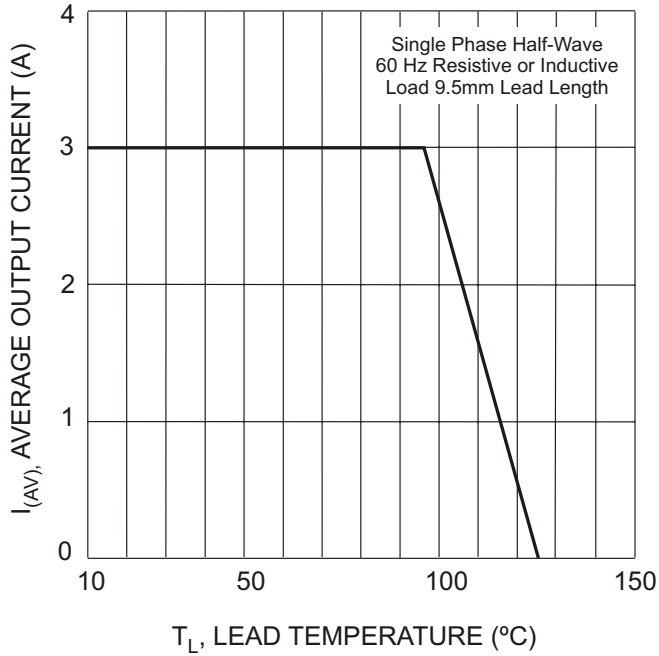


T_L , LEAD TEMPERATURE (°C)
Fig. 1 Forward Current Derating Curve

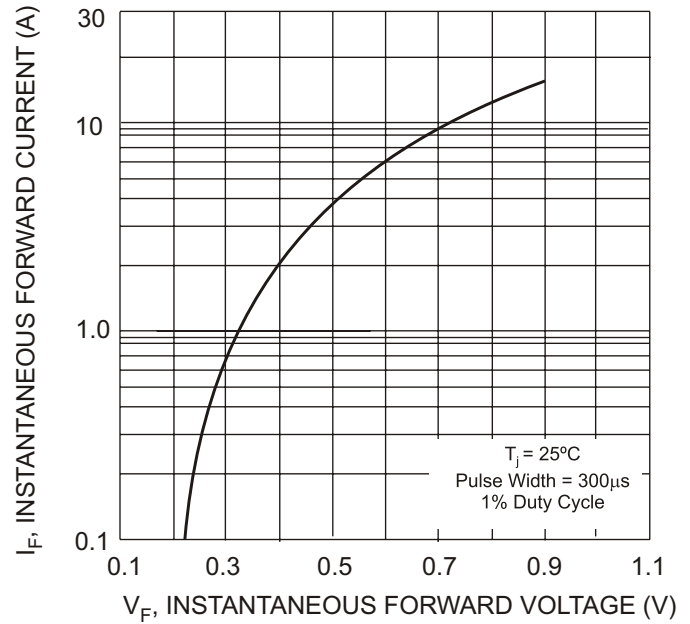

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Voltage Characteristics

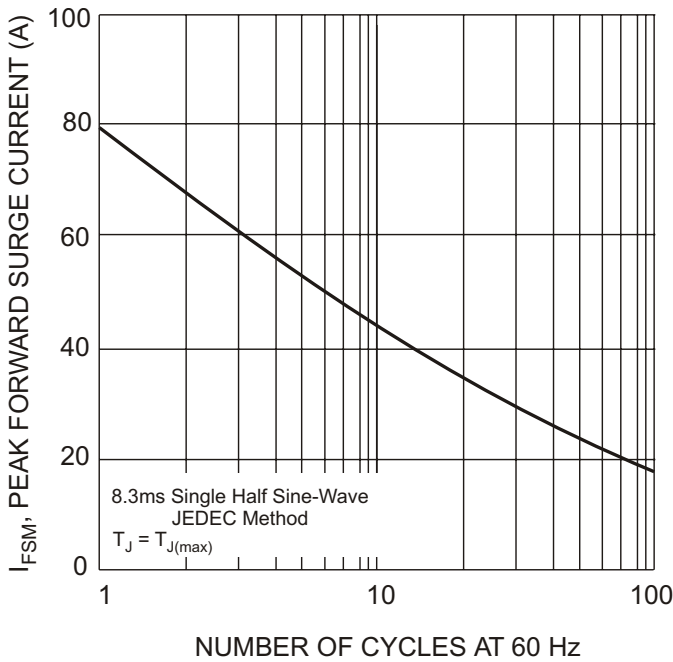

NUMBER OF CYCLES AT 60 Hz
Fig. 3 Peak Forward Surge Current

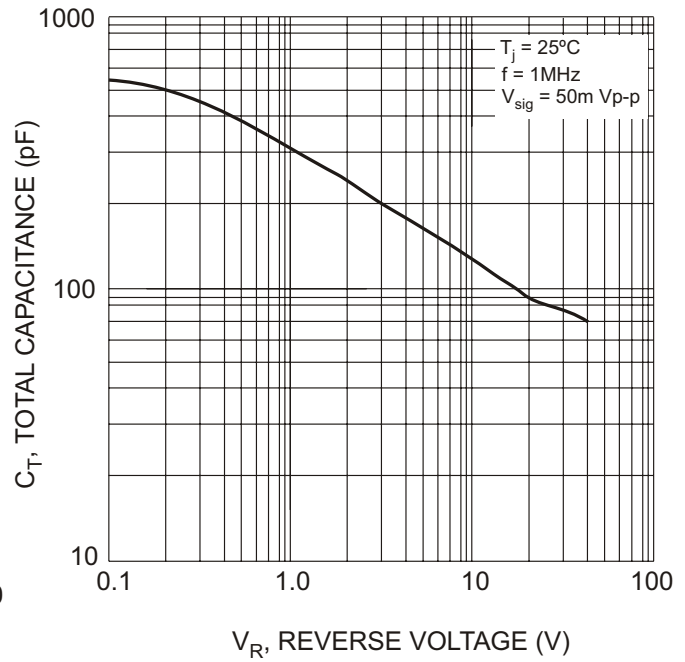

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Total Capacitance