


Max. Temperature : 260° during 10 seconds

09551663818.741	1	M3	Black Insulator	Reel Packaging (160 connectors) see page 2/2
09551666818.741	2			
09551667818.741	3			
Part number	PL	Thread	Index designation	

				Dot.	Name
				13Jul2007	ED
EC01215	14Jan2010	ED			
34884	18Feb2008	LP			
34378	13Jul2007	ED			
Mod.	Dot.	Name	HARTING EURL F-95972 Paris		




D-SUB SMT
Low Profile Male 9p
with die casted grounds
and M3 screwlocks

TB 09 55 166 x818

Sub.

Maßstab/
Scale
1,5:1


Blatt/
Page
1/2

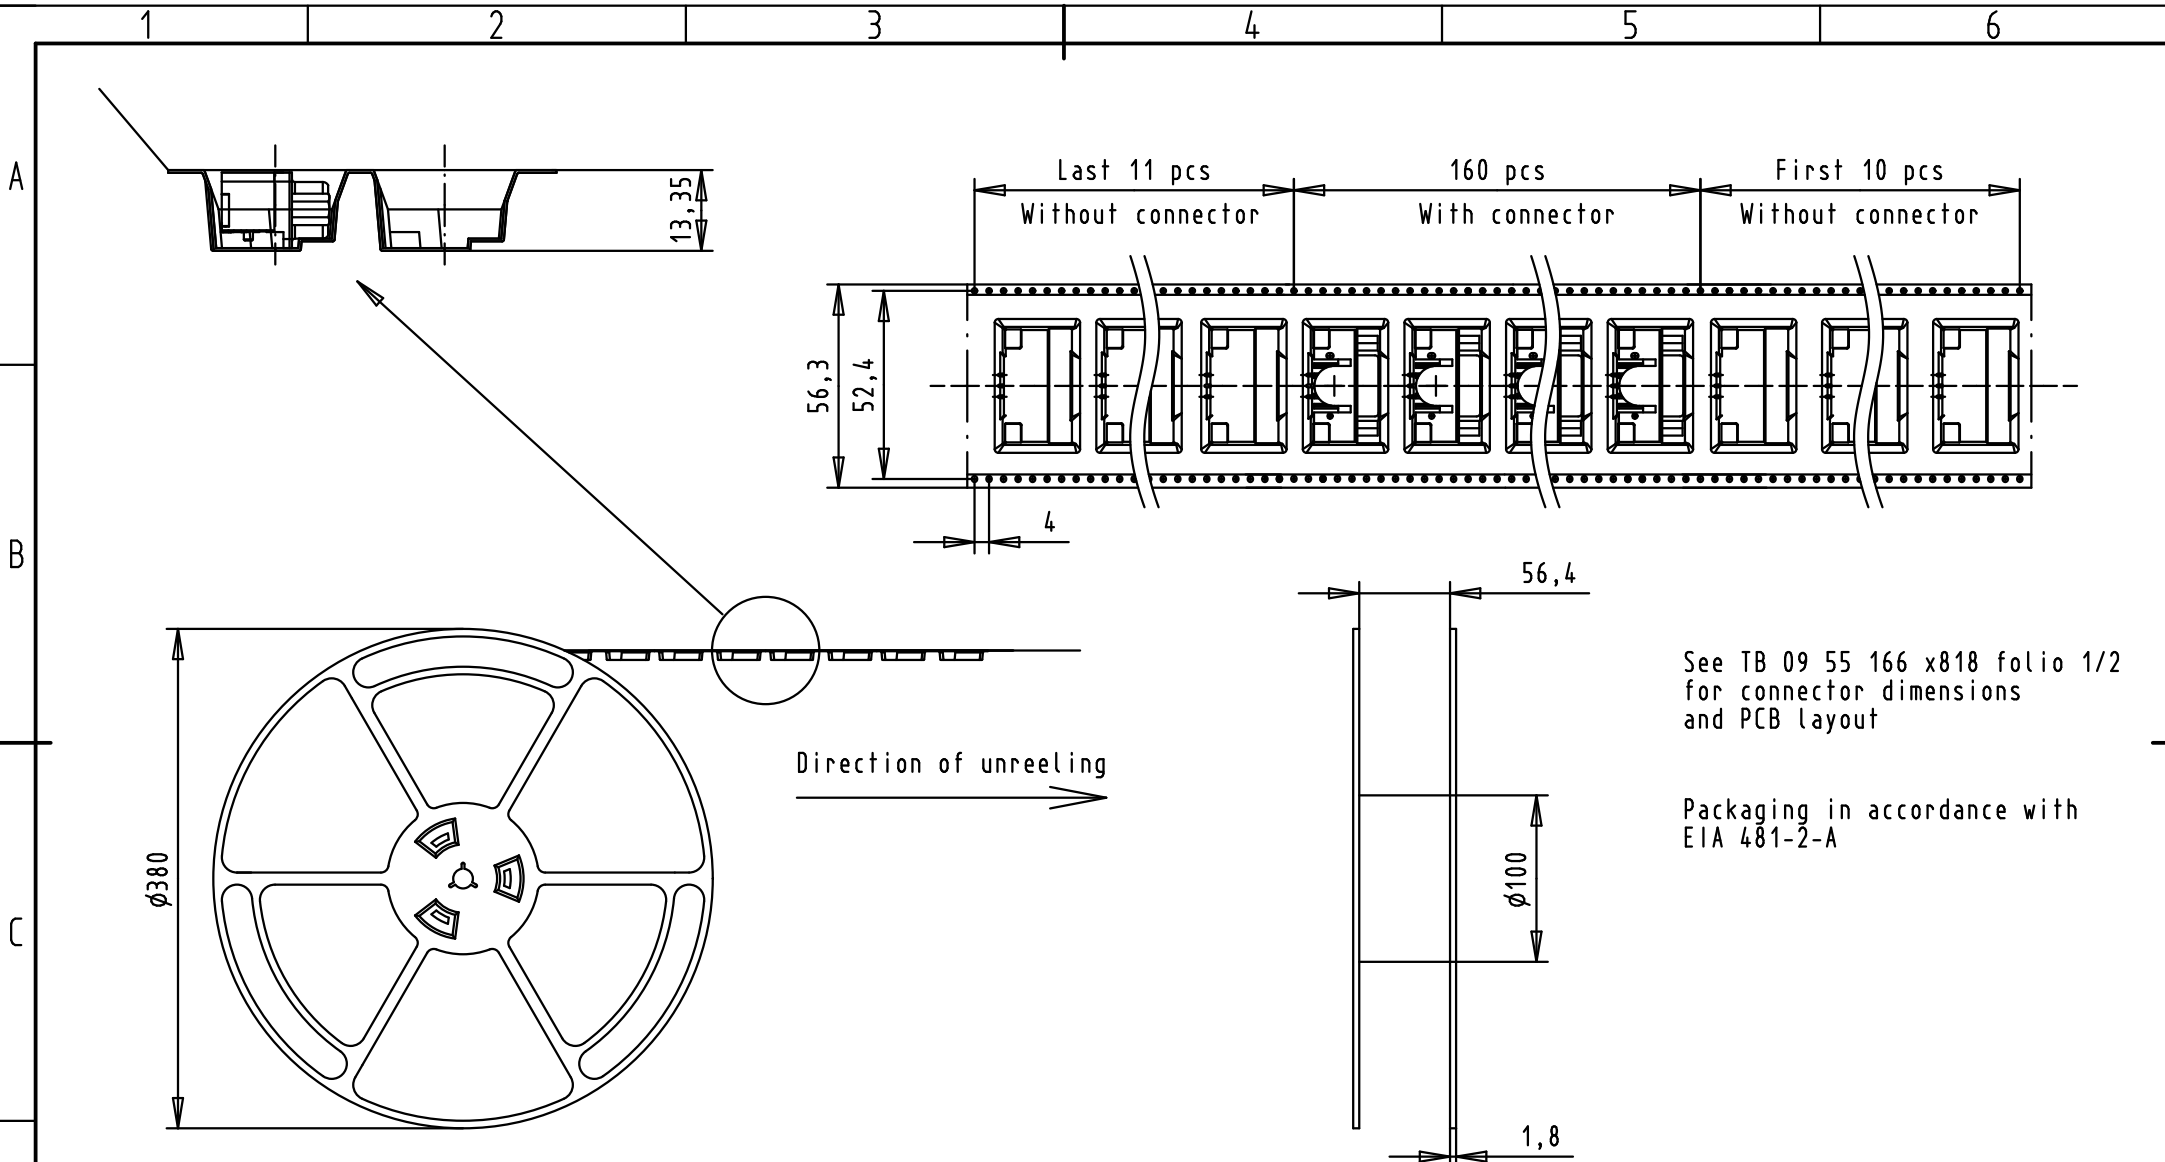

See TB 09 55 166 x818 folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2-A

Mod.	Dot.	Name	Detail.	Dot.	Name
			13Jul2007		ED
EC01215	14Jan2010	ED	Insp.		
EC01118	26Nov2009	LP	Stand.		
34407	31Aug2007	ED			
34378	13Jul2007	ED			



All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris



D-SUB SMT
Low Profile Male 9p
with die casted grounds
and M3 screwlocks

TB 09 55 166 x818

Sub.

Maßstab/
Scale

Blatt/ Page
2 / 2

Part number	PL	Thread	Index designation
09551663818.741	1	M3	Black Insulator Reel Packaging (160 connectors)
09551666818.741	2		
09551667818.741	3		