
PART NUMBER	ITEM ① BODY	ITEM (2) CONTACT	ITEM ③ INSULATOR
145-0701-811	BRASS GOLD PL.00005 MIN OVER NICKEL PL.00005 MIN OVER COPPER PL.00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL.00005 MIN OVER COPPER PL.00005 MIN	TEFLON



5:1

SPECIFICATION:

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-40 GHz

VSWR: 1.5 MAX

INSERTION LOSS: 0.05 √F dB MAX (F IN GHz) WORKING VOLTAGE: 250 VRMS MAX AT SEA LEVEL

DIELECTRIC WITHSTANDING VOLTAGE: 1000VRMS MIN AT SEA LEVEL

INSULATION RESISTANCE: 5000 MEGOHM MIN

CONTACT RESISTANCE:

CENTER CONTACT - INITIAL 3 MILLIOHM MAX, AFTER
ENVIRONMENTAL NOT APPLICABLE
OUTER CONDUCTOR - INITIAL 2 MILLIOHM MAX, AFTER
ENVIRONMENTAL NOT APPLICABLE


RF LEAKAGE: -90dB TYPICAL AT 2.5GHz


MECHANICAL:


ENGAGEMENT/DISENGAGEMENT FORCE: 2 INCH-POUNDS MAX CONTACT RETENTION: 6 LBS MIN AXIAL FORCE MATING TORQUE: 7 TO 10 INCH-POUNDS DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

OPERATING TEMPERATUR: -40 TO 85°C THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B CORROSION: MIL-STD-202, METHOD 101, CONDITION B SHOCK: MIL-STD-202, METHOD 213, CONDITION I VIBRATION: MIL-STD-202, METHOD 204, CONDITION D MOISTURE RESISTANCE: MIL-STD-202, MEHTOD 106

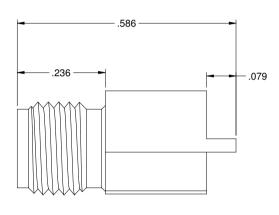

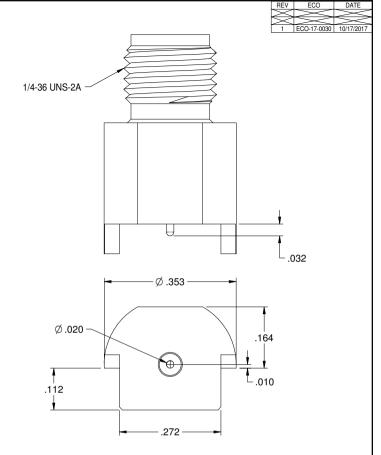



RECOMMENDED PCB LAYOUT NOTE: THIS PATTERN IS FOR REFERENCE ONLY. PATTERN MAY VARY DEPENDING ON ASSEMBLY PROCESS, BOARD TYPE, OR SPECIFIC ELECTRICAL OR MECHANICAL REQUIREMENTS.

Cinch SEE NOTE		Model No. 145-0701-811						
		RoHS2 2011/65/EU	Cage Code 3PD ANGLE PROJECTION	Title: 2.92mm END LAUNCH JACK				
is property of Charle Carmediuty Southers. It is contributed in nature, not highly legals, and south will be clear understanding that this mid happed or sopred without permission and is negariable upon demands.	SEE NOTE	X ±0.2 X.X ±0.1	· ⊕ · · □ · · Drawn by: R.SHEN	Drawi		701-811		Rev.
INTERPRET DRAWING IN. ACCORDANCE WITH ASSES V14.5-2008.		X.XX ±0.07 ANGLES ±2 DEG	Date: 9/15/16	C	DO NOT SCALE		Sheet	of 1