

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	$L \pm .03$ [0,8]	$W \pm .01$ [0,3]	$C \pm .02$ [0,5]	$M \pm .03$ [0,8]	$H \pm .01$ [0,3]
E18-6FB	#6	M3	.63 [16,00]	.30 [7,62]	.21 [5,33]	.49 [12,45]	.15 [3,81]
E18-8FB	#8	M4	.69 [17,53]	.32 [8,13]	.25 [6,35]	.53 [13,46]	.17 [4,32]
E18-10FB	#10	M5	.71 [18,03]	.35 [8,89]	.25 [6,35]	.55 [13,97]	.20 [5,08]

UL & CSA TOOLS
CT-100A CT-200 CT-600-A (CT-570CH) CT-1570 CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS
CT-160 CT-260

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - A. #22-18 AWG [0,5-1,0 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 302°F [150°C] MAX. OPERATING TEMPERATURE
 - C. 2000 VOLTS MAX
- MATERIAL:
 - A. STAMPING: .032" [0,8] THK COPPER, TIN PLATED
- WIRE STRIP LENGTH: 9/32" $\begin{matrix} +1/32 \\ -0 \end{matrix}$ [7,1mm $\begin{matrix} +0,8 \\ -0 \end{matrix}$]
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

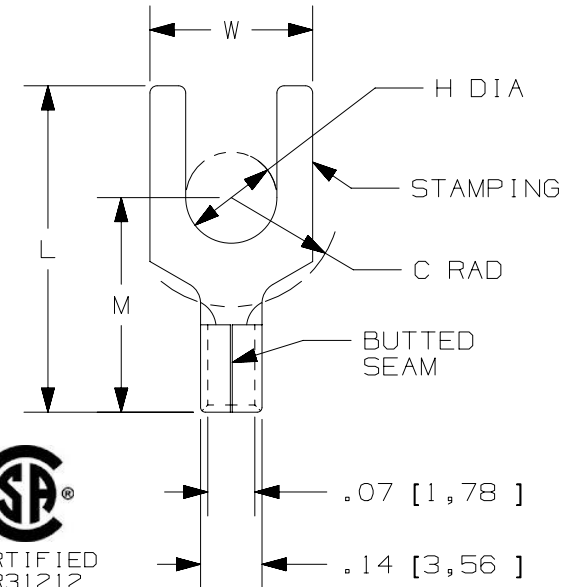

TITLE	
STRONGHOLD FORK TERMINAL NON-INSULATED, BUTTED SEAM #22-18 AWG	
CUSTOMER DRAWING	
ITEM REVISION NAME	00123SHM/00
DATASET FILE NAME	00123SHM_DC/00
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.X ±	.XXX ±
.XX ±	ANGLES ±
THIRD ANGLE PROJECTION	
DRAWING NUMBER: SH41461	
DRAWN BY	JHNU
DATE	2/18
CHK	TMR
SCALE	N.T.S.
SHEET 1 OF 1	
SIZE	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/12