

STRADA-SQ-ME

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less than the pole height. Version with location pins.


TECHNICAL SPECIFICATIONS:

Dimensions	25.0 mm
Height	8.6 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	8.3 kg
Quantity in Box	2058 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-SQ-ME	Lens	PMMA	clear

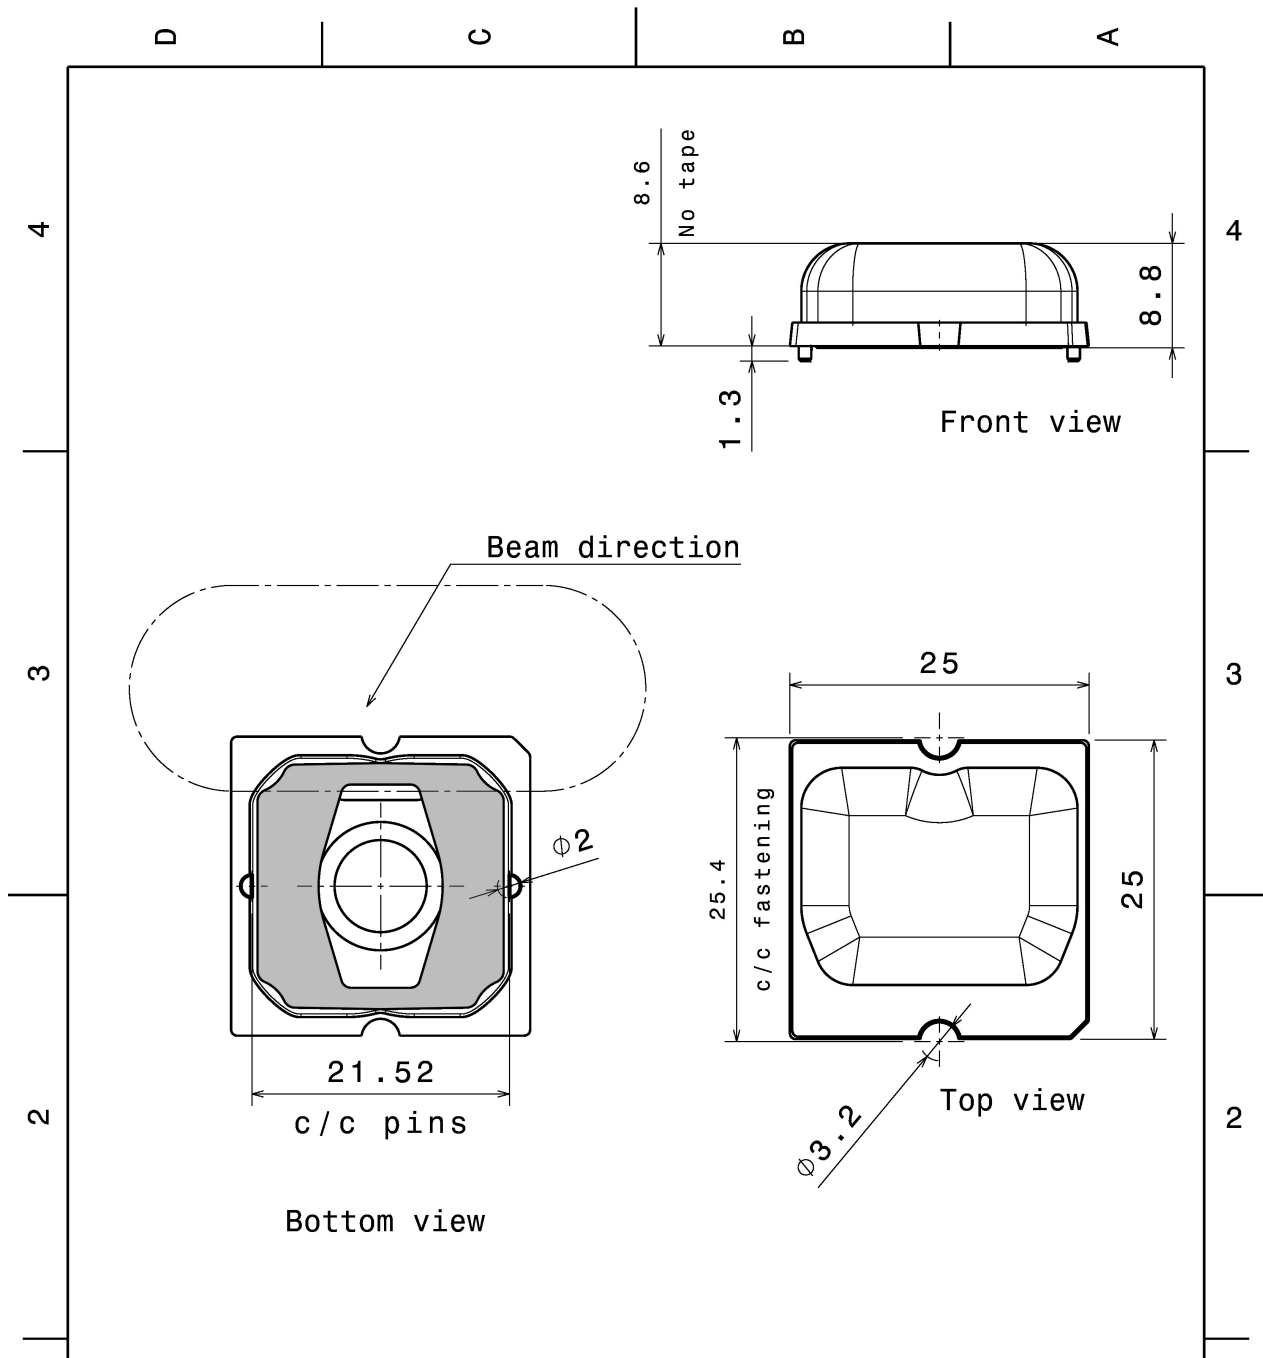


<p>Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L</p>		<p>Ledil Oy Salorankatu 10 FIN 24240 SALO Finland</p>	
<p>THIRD ANGLE PROJECTION:</p>		<p>DRAWING TITLE STRADA-SQ-ME_Mechanicaldrawing</p>	
<p>This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."</p>		<p>SIZE A4</p>	<p>PART NUMBER -</p>
<p>SCALE 2:1</p>		<p>WEIGHT -</p>	<p>SHEET 1/1</p>

PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED PSL440
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.710 cd/lm
Required components:

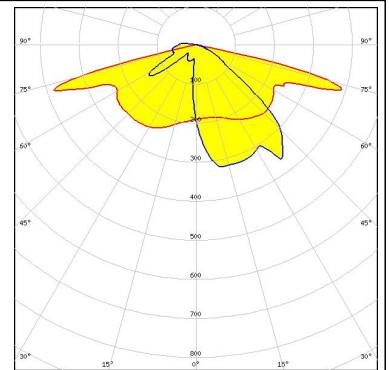


CITIZEN

LED PSL445
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.420 cd/lm
Required components:

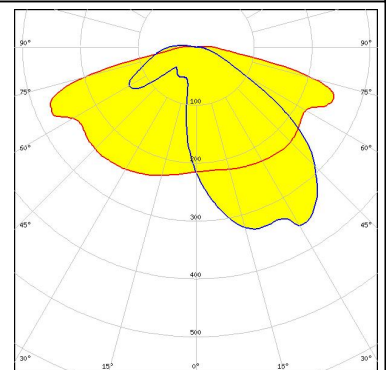


CREE

LED XHP50
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.560 cd/lm
Required components:

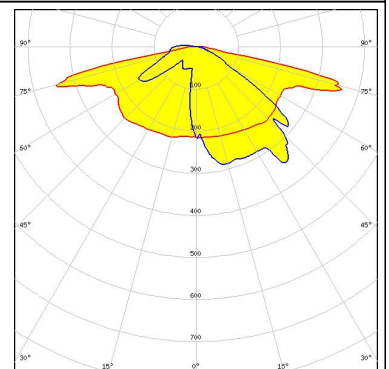

LUMILEDS

LED LUXEON MZ
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.960 cd/lm
Required components:

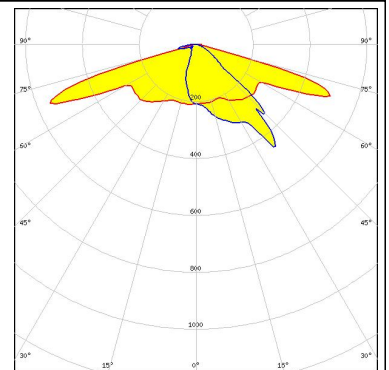


PHOTOMETRIC DATA (SIMULATED):




LED MHB-A/B
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:




LED MK-R
FWHM Asymmetric
Efficiency 91 %
Peak intensity cd/lm
Required components:

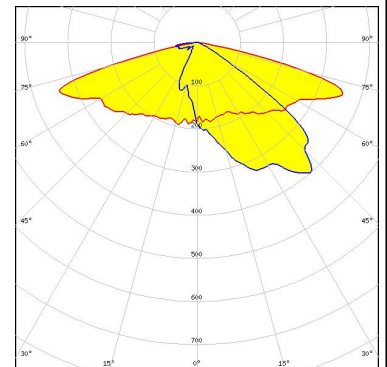

LED XP-G3
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.860 cd/lm
Required components:

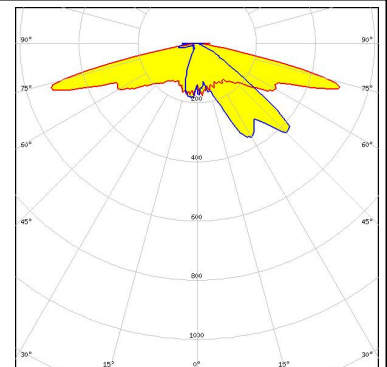


LED LUXEON M/MX
FWHM Asymmetric
Efficiency 90 %
Peak intensity cd/lm
Required components:

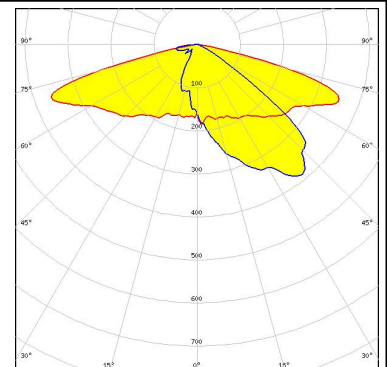

PHOTOMETRIC DATA (SIMULATED):




LED NVSxx19B/NVSxx19C
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.950 cd/lm
Required components:

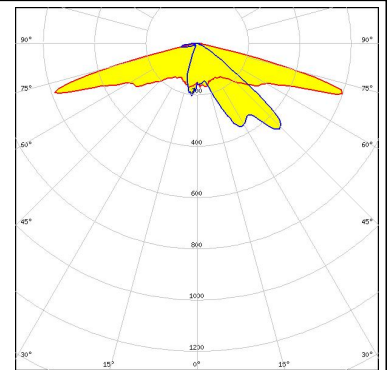


LED Duris S8
FWHM Asymmetric
Efficiency 93 %
Peak intensity cd/lm
Required components:



LED OSCONIQ P 7070
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.654 cd/lm
Required components:

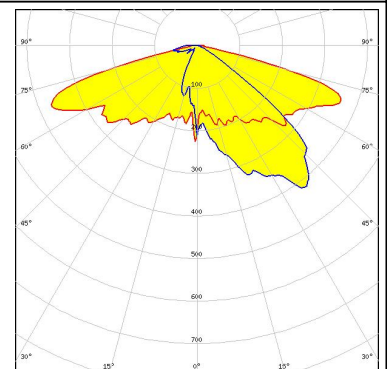

LED Oslon Square Gen3
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.820 cd/lm
Required components:

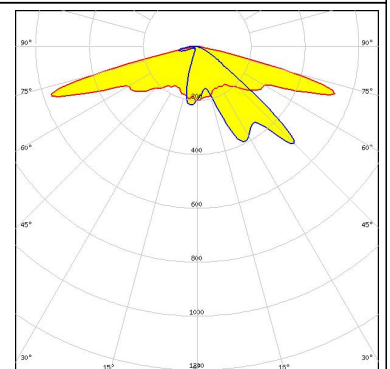

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)