NOTES:

1. MATERIAL
   HOUSING: PBT, GLASS FILLED, UL RATED 94V-0, BLACK.
   FRONT SHELL: CARBON STEEL.
   CONTACTS AND BUSHINGS: BRASS.
2. FINISH
   FRONT SHELL: TIN PLATED.
   CONTACTS: GOLD FLASH OVER 2.54μm [.000100] MIN NICKEL ON ENTIRE CONTACT AREA.
   BUSHINGS: NICKEL PLATED.
3. ELECTRICAL SPECIFICATIONS:
   10-17 OHMS AT 30 MHz, TYP.
   12-19 OHMS AT 50 MHz, TYP.
   15-24 OHMS AT 100 MHz, TYP.
4. SCI, 56-423-001 AND DATE CODE MARKED ON THIS SURFACE.

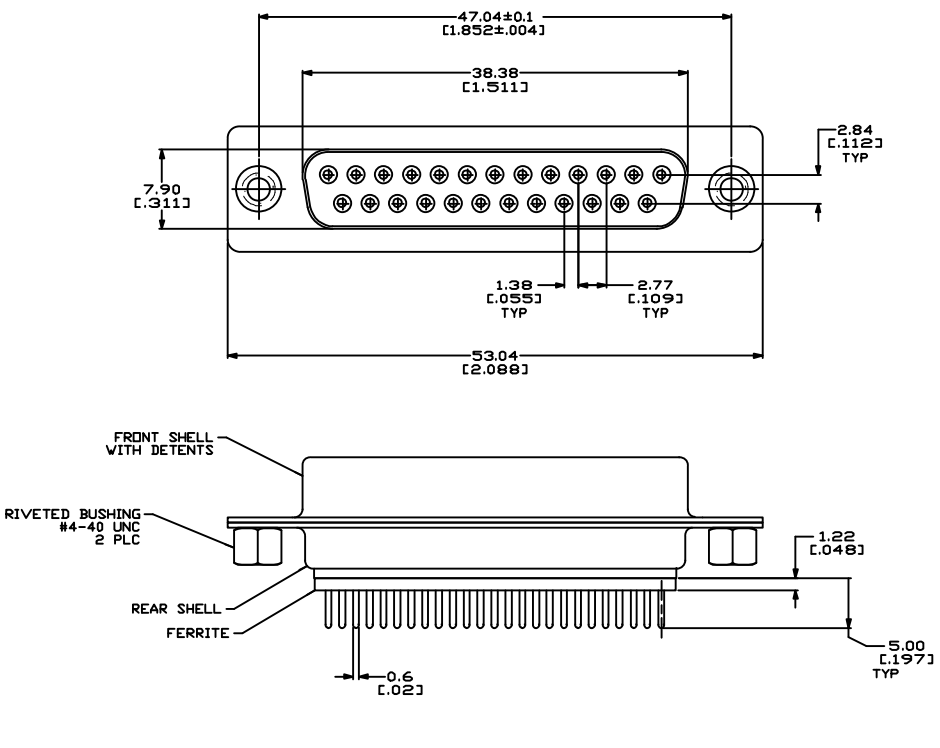

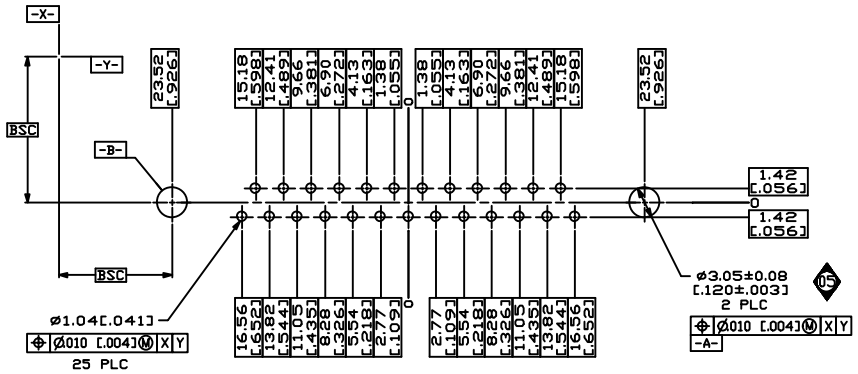

P.C. BOARD MOUNTING DIMENSIONS

REV. NO.	CHANGE NOTICE
5	CN 36556-ENG
4	CN 34918-CPD
3	CN 17251-CPD
2	CN 196178 REDRAWN

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

DO NOT SCALE.

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx ± .02
Dec. .xxx ± .005
Angles ±0° 30'

CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

FAIRVIEW PENNSYLVANIA

Dwn. M. WOJTECKI
DATE 8-16-07
Ckd. D. HENRY
Sheet 1 of 1

Description: PLUG ASSEMBLY

56-423-001
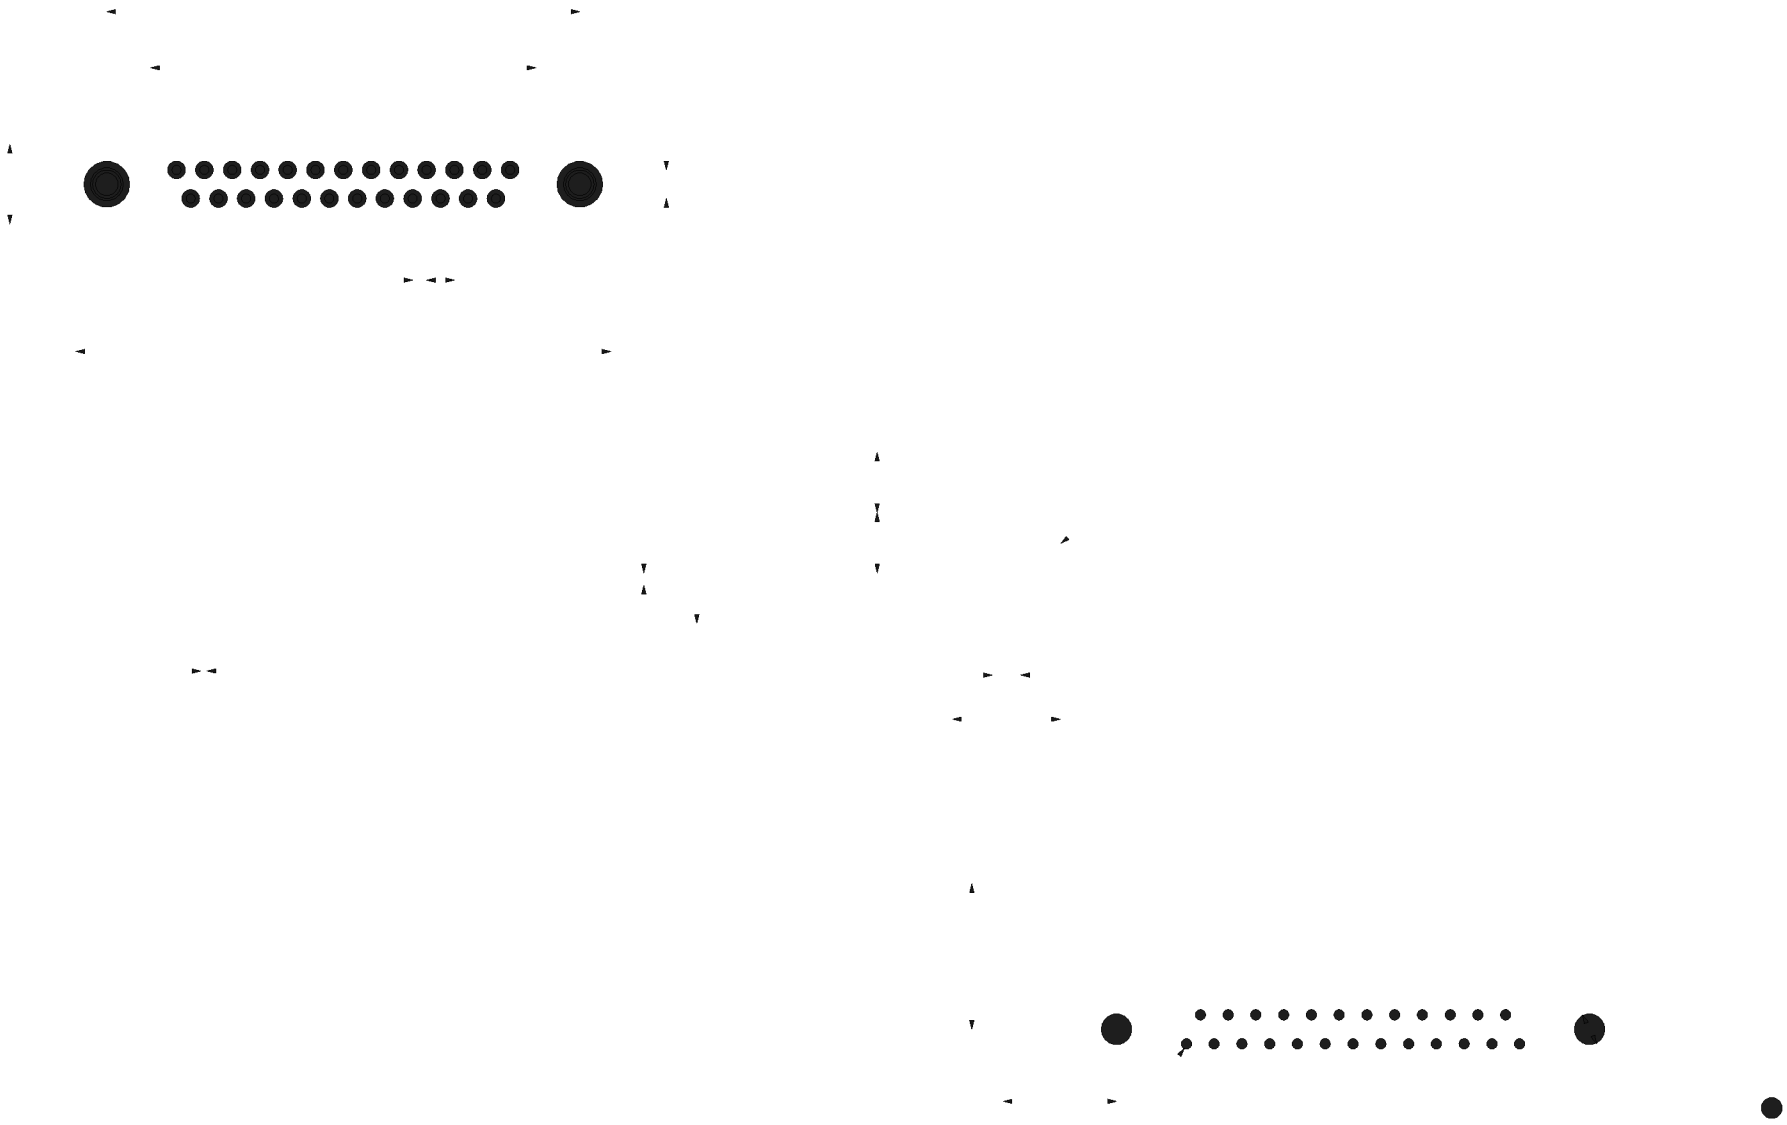
Quality Products From The Specialists In Electro-Magnetic Compatibility