

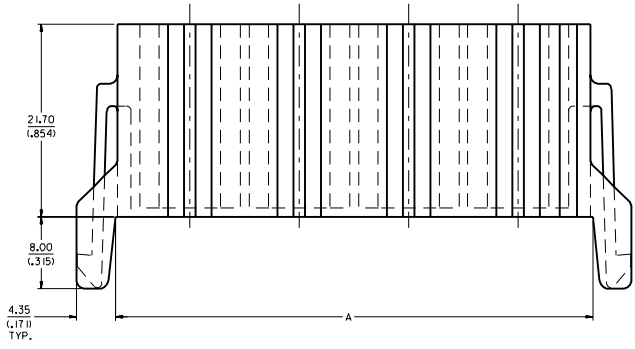
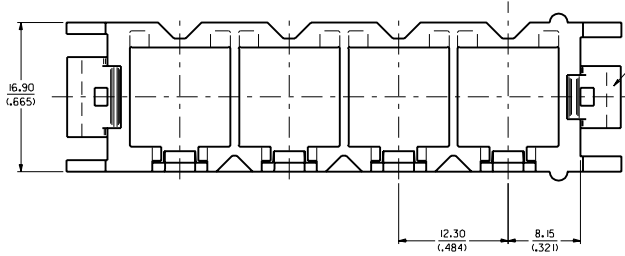


ANTI-TANGLE BARRIER
4 PLACES

POSITION *1 DESIGNATION

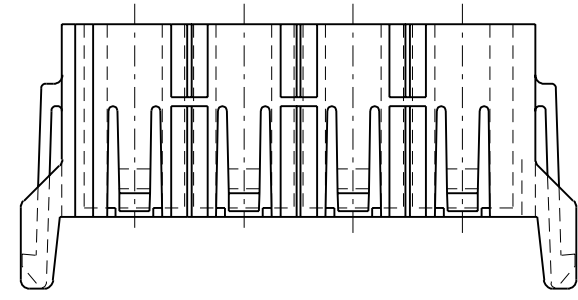

SEE NOTE 8



LATCHES ARE KEYED TO PREVENT IMPROPER MATING.

NOTES:

1. MATERIAL: POLYESTER (PBT), 7.5% GLASS FILLED, UL 94V-0. COLOR: BLACK
2. FINISH: NONE
3. PRODUCT SPEC.: PS-43510-002.
4. ALL DIMENSIONS SHOWN FOR REFERENCE ONLY.
5. PART TO BE USED WITH PODS SHOWN IN CHART. SEE SHEET 2 FOR ASSEMBLY INFORMATION.
6. PODS MAY BE PLACED IN ANY POSITION DESIRED.
7. PART MATES WITH 43838-0*** PLUG SHROUD, 44040-0*** VERTICAL HEADER SHROUD AND 44041-0*** RIGHT ANGLE HEADER SHROUD.
8. SEE SHEET 2 FOR APPLICATION NOTES.

43516-0001	BLIND-MATE POD
43512-0001	6 CIRCUIT MICRO-FIT RECEPTACLE
43511-0001	4 CIRCUIT MINI-FIT JR. RECEPTACLE
43510-0001	1 CIRCUIT MINI-FIT SR. RECEPTACLE

MATERIAL NO.	DESCRIPTION
AVAILABLE PODS	

MATERIAL NO.	POSITIONS	DIM. "A"
43838-0601	6	78.30 (3,083)
43838-0501	5	66.00 (2,598)
43838-0401	4	53.70 (2,114)
43838-0301	3	41.40 (1,630)
43838-0201	2	29.10 (1,146)

2	A2
1	A2

REV. NOTES REV A2	SEC. NO. UCR1999-0712	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)	SCALE 4 : 1	DESIGN UNITS mm <input type="checkbox"/> INCH <input type="checkbox"/>	DRAWN BY & DATE COMERC1 97/10/06	TITLE: RECEPTACLE SHROUD, 12.3 mm (1.484) PITCH, COMPRODE SYSTEM	MATERIAL NO.	DIMENSIONS: mm <input type="checkbox"/> INCH <input type="checkbox"/> mm ONLY	SHT	REV
	APP. COMERC1 99/04/06	APPROVED BY & DATE FRY 97/10/10	4 PLACES ±0.--- ±.--- 3 PLACES ±0.--- ±.--- 2 PLACES ±0.--- ±.--- 1 PLACE ±0.--- ±.---	APPROVED BY & DATE FRY 97/10/10	CAD FILENAME S4383803.DGN	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	MATERIAL NO. SD-43838-002	THIRD ANGLE PROJECTION	INCH <input type="checkbox"/> mm ONLY	1	2